



IS standard



GROWING TOGETHER

MULTIMAX

RADIAL MPT TIRES

MP 529



PRODUCT DATA SHEET



Radial



MULTIMAX MP 529
RADIAL MPT TIRES

MULTIMAX MP 529 is a steel belted multi-purpose radial tire designed for telehandlers in industrial applications. Its tread design has been specially developed for hard surfaces. The strong sidewall and the larger footprint area ensure outstanding stability in lift mode. MULTIMAX MP 529 also features a strong puncture-resistant casing and is made of a special cut-and-chip-resistant compound providing extraordinary durability and a long service life.

Technologies



Larger Footprint



Steel Belted

Performance



Cut and Chip Resistance



Durability



Hard Surfaces




High Puncture Resistance



Stability

	Tire size	Type	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
										Rec.	Alt.
Ø 18"	340/80 R 18	TL	-	143 A8/B	SB	343	1001	445	3007	11 ; 11 SDC ; W 11	W 10 ; 12 ; 12 SDC
Ø 20"	400/70 R 20 IND (405/70 R 20) NEWSIZE	TL	-	149 A8/B	SB	415	1090	500	3314	13	12 SDC ; 13 SDC ; 14

SB: Steel Belted

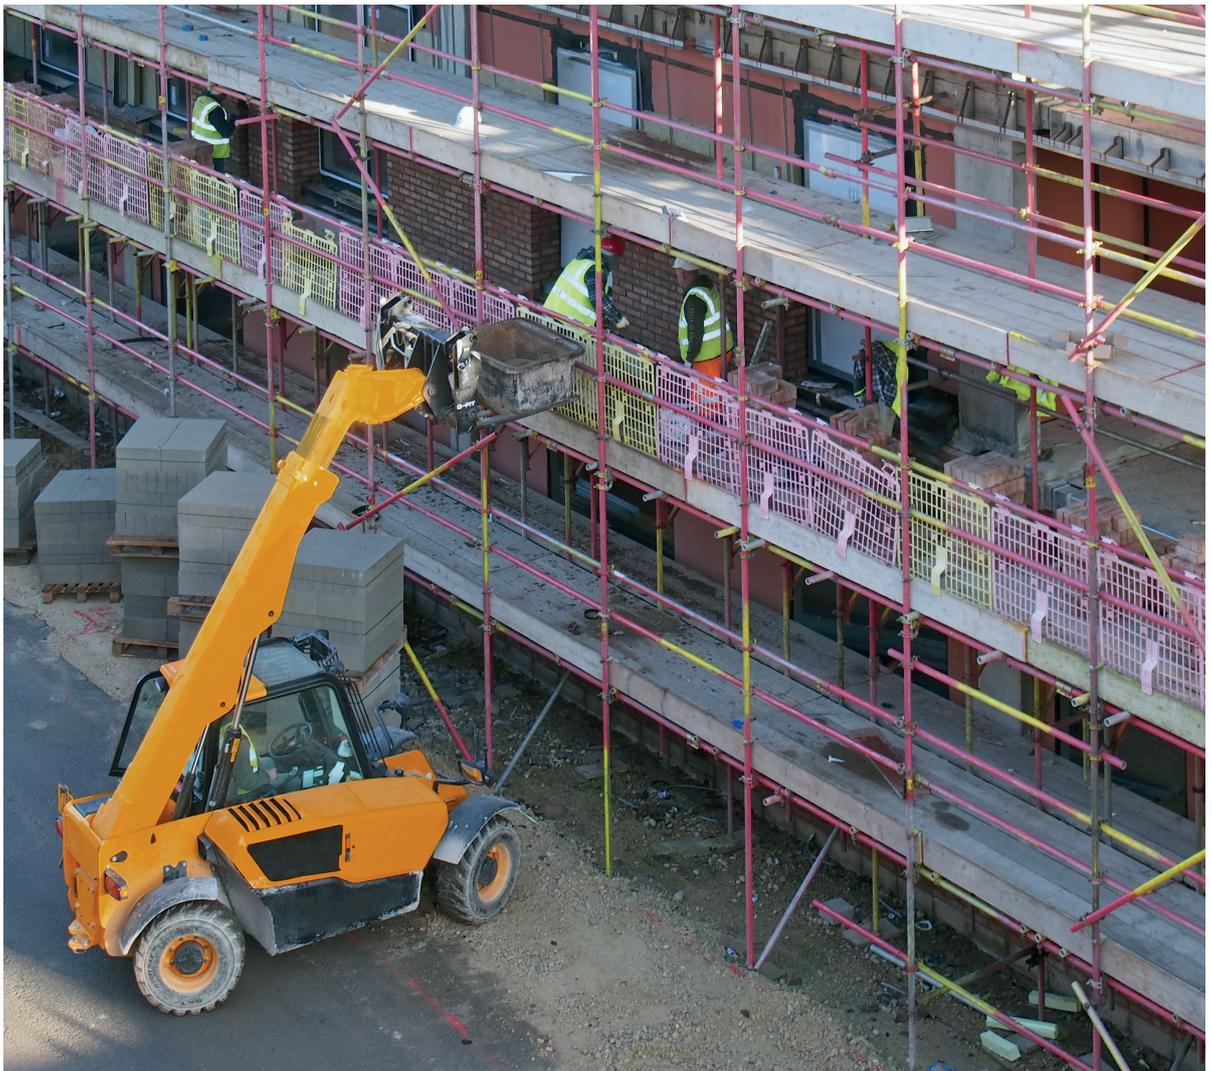

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference