



US standard



GROWING TOGETHER

SM 55 IND-5S



PRODUCT DATA SHEET



Bias



SM 55 IND-5S

SM 55 IND-5S has been specially designed for reach stackers and container handlers. Its special abrasion-resistant tread compound provides an extended tire life on asphalt or concrete surfaces and offers excellent stability to vehicles in lift mode.

Technologies



Extra Deep Tread



Heavy Duty

Performance



Cut and Chip Resistance



Durability




Hard Surfaces



Stability

	US CODE	Tire size	Type	PR	LI/SS	Version	O.D. (In.)	O.W. (In.)	SLR (In.)	RC (In.)	TREAD DEPTH (32nds)	TIRE WEIGHT (lbs)	RIM	
													Rec.	Alt.
Ø 24"	94060498	12.00 - 24	TT	20	-	PORT IND	50.2	12.2	23.4	148.7	76	332	8.5	7.33 V ; 8 ; 8.00 V ; 8.50 V
Ø 25"	94039609	18.00 - 25	TL	40	-	PORT SPL	65.6	20.4	30.1	201.5	105	1080	13.00/2.5	15.00/2.5

PORT IND: Port Industrial - PORT SPL: Port Special

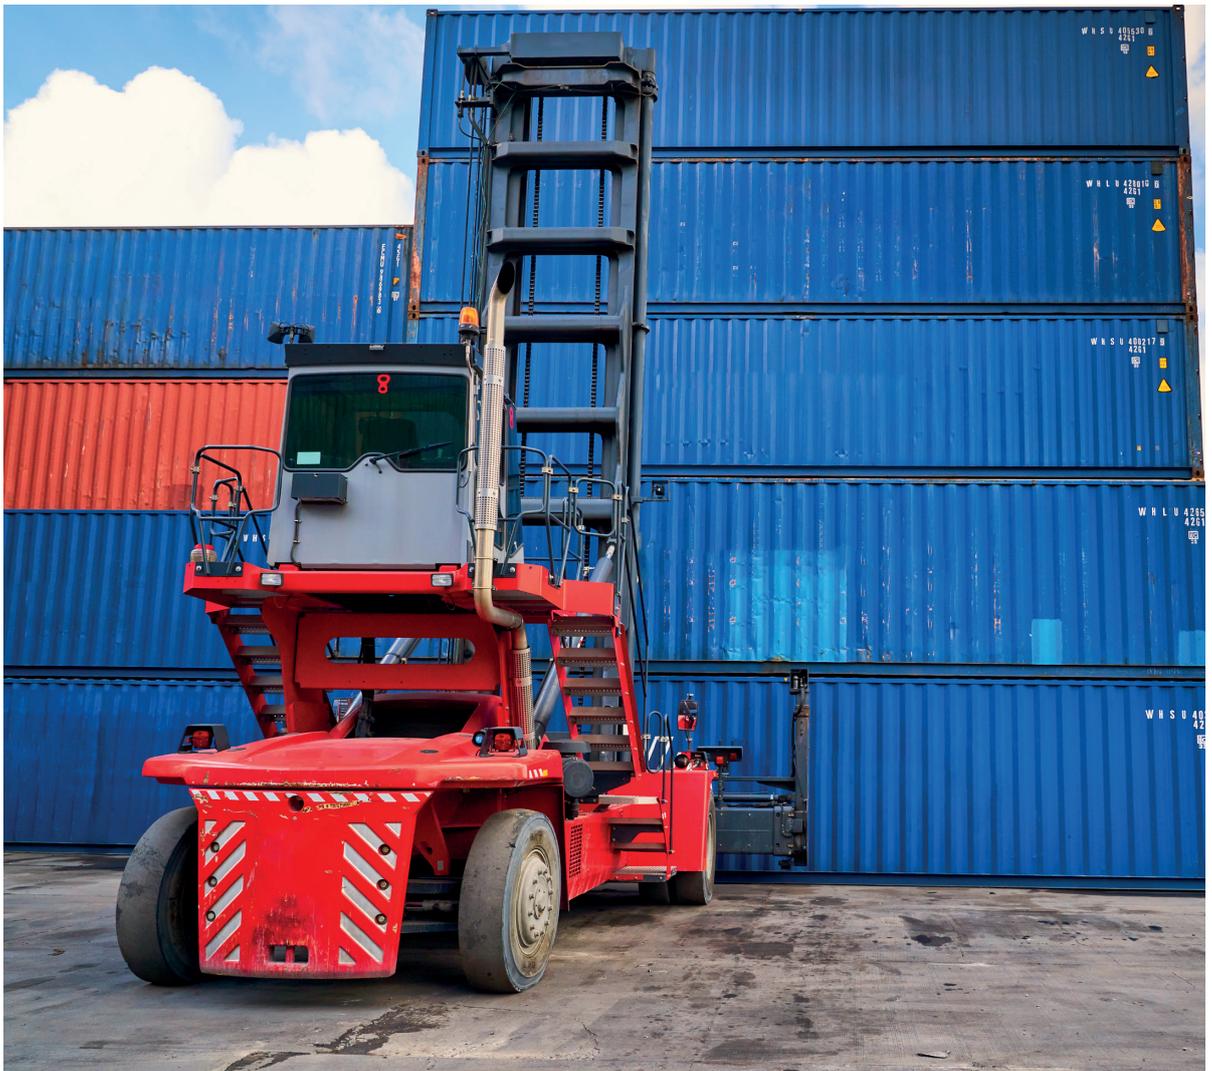

Tolerances: O.D. ± 2% - O.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; O.W. = Overall Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference