



IS standard




GROWING TOGETHER

EARTHMAX

RADIAL OTR TIRES

SR 49

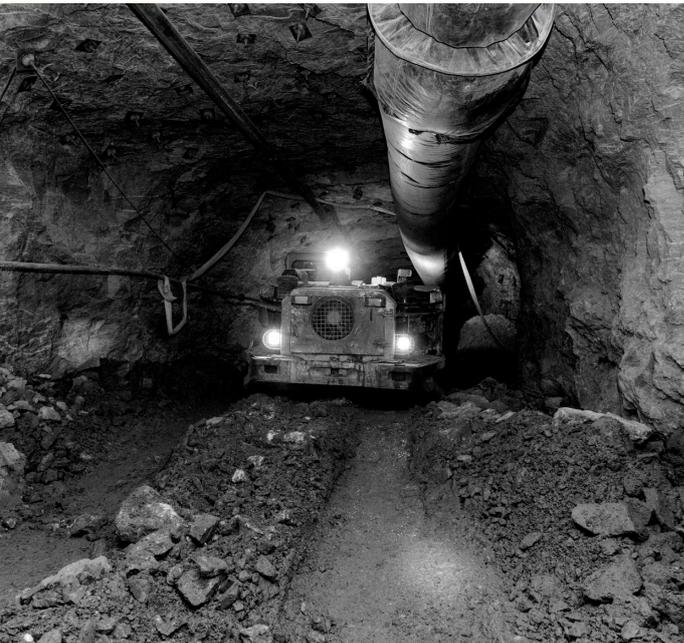

PRODUCT DATA SHEET



Radial



EARTHMAX SR 49

RADIAL OTR TIRES



EARTHMAX SR 49 is an All Steel radial tire that has been engineered for loaders and dozers, low profile dump trucks (LPDT) and load haul dumps (LHD). EARTHMAX SR 49 provides optimum performance in severe mining operations requiring exceptional traction and stability. The tire has a directional pattern and is made of a special cut-resistant compound providing excellent durability.

Technologies



All Steel

Performance



Durability



Traction




Cut Resistance



Stability

| | Tire size | Type | TRA CODE | STAR RATING | LI/SS | Version | TKPH | O.W. (mm) | O.D. (mm) | SLR (mm) | RC (mm) | TREAD DEPTH (mm) | RIM | |
|-------|------------|------|----------|--------------|--------|---------|------|-----------|-----------|----------|---------|------------------|-----------|------|
| | | | | | | | | | | | | | Rec. | Alt. |
| Ø 33" | 35/65 R 33 | TL | L-4 | *** | 229 A2 | CRC | - | 899 | 2061 | 890 | 6125 | 59 | 28.00/3.5 | - |
| | 35/65 R 33 | TL | E-4/L-4 | ****/ *** | - | CRC | - | 899 | 2061 | 890 | 6125 | 59 | 28.00/3.5 | - |
| | 35/65 R 33 | TL | SH-4 | **** | - | CRC | - | 899 | 2061 | 890 | 6125 | 59 | 28.00/3.5 | - |
| | 35/65 R 33 | TL | L-4 | ** | 224 A2 | CRC | - | 899 | 2061 | 890 | 6125 | 59 | 28.00/3.5 | - |
| Ø 45" | 45/65 R 45 | TL | L-4 | ** | 245 A2 | CRC | - | 1130 | 2730 | 1190 | 8113 | 72 | 36.00/4.5 | - |

CRC: Cut Resistance Compound

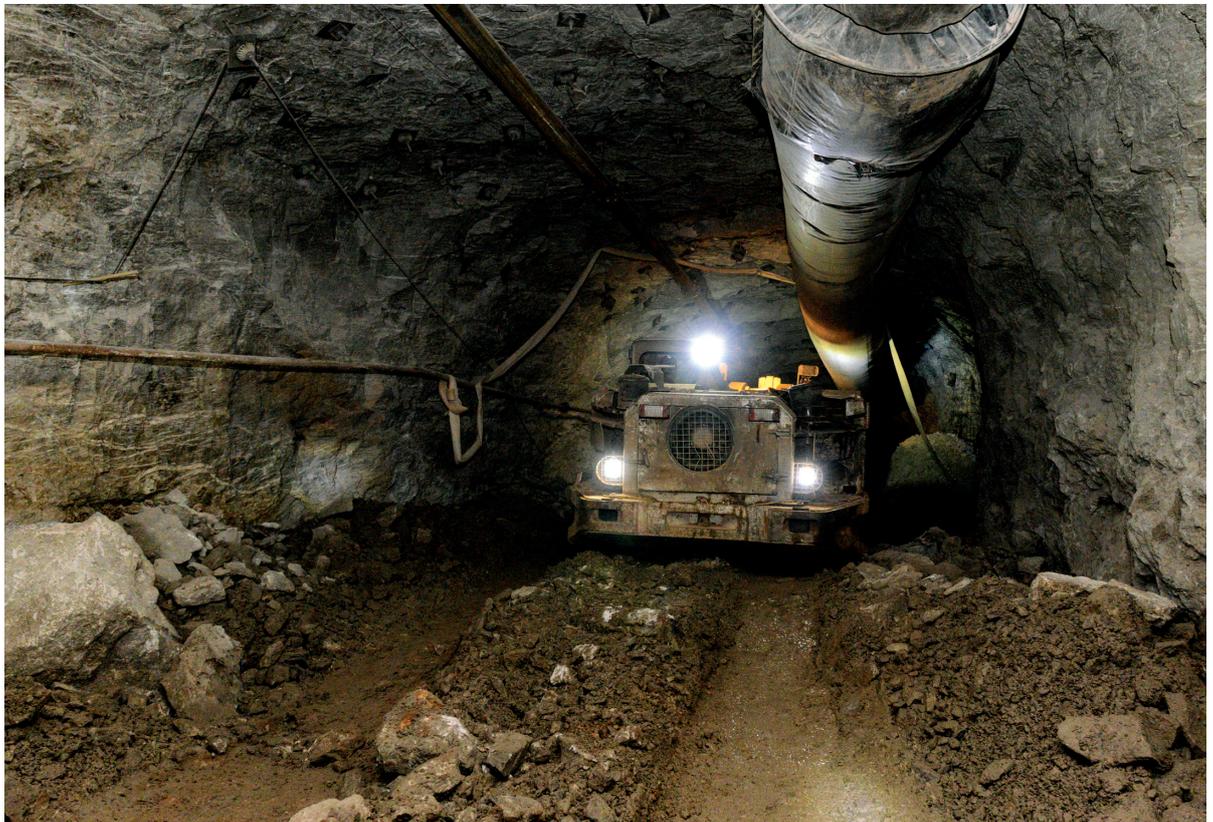

Tolerances: O.D. ± 2% - O.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; O.W. = Overall Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference