



IS standard



GROWING TOGETHER

MAGLIFT ECO



PRODUCT DATA SHEET



Solid



MAGLIFT ECO

🇬🇧 MAGLIFT ECO has been particularly designed for forklifts. The tire features a wide lug pattern providing maximum stability and optimized load distribution. Its reinforced structure eliminates slippage risks whilst the specifically designed rim guard ensures protection against wheel damage. MAGLIFT ECO shows excellent traction as well as low rolling resistance and low heat built up for improved efficiency.

Technologies



Extra Deep Tread

Performance



Comfort



Cut and Chip Resistance



Durability



High Load Capacity



Stability

| | Tire size | Type | PR | LI/SS | Version | S.W. (mm) | O.D. (mm) | SLR (mm) | RC (mm) | RIM | |
|-------|------------------------------|------|----|-------|---------|--------------|--------------|-------------|------------|-------------|------|
| | | | | | | | | | | Rec. | Alt. |
| Ø 8" | 4.00 - 8 | - | - | - | STD | 100 | 404 | - | - | 3.00 D - 8 | - |
| | 4.00 - 8 | - | - | - | LIP | 100 | 404 | - | - | 3.00 D - 8 | - |
| | 5.00 - 8 | - | - | - | STD | 111 | 455 | - | - | 3.00 D - 8 | - |
| | 5.00 - 8 | - | - | - | LIP | 111 | 455 | - | - | 3.00 D - 8 | - |
| | 15 X 4.5 - 8 (125/75 - 8) | - | - | - | STD | 109 | 378 | - | - | 3.00 D - 8 | - |
| | 15 X 4.5 - 8 (125/75 - 8) | - | - | - | LIP | 109 | 378 | - | - | 3.00 D - 8 | - |
| | 16 X 6 - 8 (150/75 - 8) | - | - | - | STD | 140 | 407 | - | - | 4.33 R - 8 | - |
| | 16 X 6 - 8 (150/75 - 8) | - | - | - | LIP | 140 | 407 | - | - | 4.33 R - 8 | - |
| Ø 9" | 18 X 7 - 8 (180/70 - 8) | - | - | - | STD | 133 | 451 | - | - | 4.33 R - 8 | - |
| | 18 X 7 - 8 (180/70 - 8) | - | - | - | LIP | 133 | 451 | - | - | 4.33 R - 8 | - |
| | 6.00 - 9 | - | - | - | STD | 130 | 522 | - | - | 4.00 E - 9 | - |
| | 6.00 - 9 | - | - | - | LIP | 130 | 522 | - | - | 4.00 E - 9 | - |
| Ø 9" | 21 X 8 - 9 (200/75 - 9) | - | - | - | STD | 175 | 520 | - | - | 6.00 E - 9 | - |
| | 21 X 8 - 9 (200/75 - 9) | - | - | - | LIP | 175 | 520 | - | - | 6.00 E - 9 | - |
| Ø 10" | 6.50 - 10 | - | - | - | STD | 153 | 571 | - | - | 5.00 F - 10 | - |
| | 6.50 - 10 | - | - | - | LIP | 153 | 571 | - | - | 5.00 F - 10 | - |
| | 23 X 9 - 10 (225/75 - 10) | - | - | - | STD | 184 | 578 | - | - | 6.50 F - 10 | - |
| | 23 X 9 - 10 (225/75 - 10) | - | - | - | LIP | 184 | 578 | - | - | 6.50 F - 10 | - |

STD: Standard - LIP: LIP Version

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference



Solid

Technologies



Extra Deep Tread

Performance



Comfort



Cut and Chip Resistance




Durability



High Load Capacity



Stability

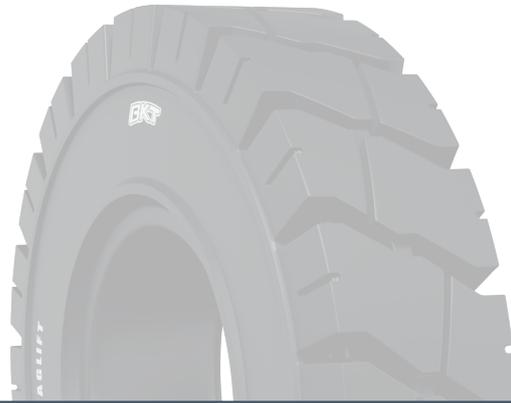

| | Tire size | Type | PR | LI/SS | Version | S.W. (mm) | O.D. (mm) | SLR (mm) | RC (mm) | RIM | |
|-------|--|------|----|-------|---------|--------------|--------------|-------------|------------|-------------|------|
| | | | | | | | | | | Rec. | Alt. |
| Ø 10" | 200/50 - 10 | - | - | - | STD | 180 | 452 | - | - | 6.50 F - 10 | - |
| | 200/50 - 10 | - | - | - | LIP | 180 | 452 | - | - | 6.50 F - 10 | - |
| Ø 12" | 7.00 - 12 | - | - | - | STD | 164 | 645 | - | - | 5.00 S - 12 | - |
| | 7.00 - 12 | - | - | - | LIP | 164 | 645 | - | - | 5.00 S - 12 | - |
| | 27 X 10 - 12 (250/75 - 12) | - | - | - | STD | 225 | 670 | - | - | 8.00 G - 12 | - |
| | 27 X 10 - 12 (250/75 - 12) | - | - | - | LIP | 225 | 670 | - | - | 8.00 G - 12 | - |
| Ø 15" | 8.25 - 15 | - | - | - | STD | 210 | 808 | - | - | 6.5 - 15 | - |
| | 8.25 - 15 | - | - | - | LIP | 210 | 808 | - | - | 6.5 - 15 | - |
| | 8.15 - 15/28 X 9 - 15 (225/75 - 15) | - | - | - | STD | 204 | 691 | - | - | 7.0 - 15 | - |
| | 8.15 - 15/28 X 9 - 15 (225/75 - 15) | - | - | - | LIP | 204 | 691 | - | - | 7.0 - 15 | - |
| | 250 - 15 (250/70 - 15) | - | - | - | STD | 209 | 714 | - | - | 7.0 - 15 | - |
| | 250 - 15 (250/70 - 15) | - | - | - | LIP | 209 | 714 | - | - | 7.0 - 15 | - |
| | 300 - 15 (315/70 - 15) | - | - | - | STD | 242 | 820 | - | - | 8.0 - 15 | - |
| | 300 - 15 (315/70 - 15) | - | - | - | LIP | 242 | 820 | - | - | 8.0 - 15 | - |

STD: Standard - LIP: LIP Version



Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference