



IS standard



GROWING TOGETHER

SUPER TRAX HD



PRODUCT DATA SHEET



Bias



SUPER TRAX HD

🇬🇧 SUPER TRAX HD has been specifically engineered for forklifts in heavy-duty material handling operations, including port and mining applications. The extra deep tread is made of a unique wear-resistant tread compound ensuring a longer service life. SUPER TRAX HD features a strong casing and a reinforced sidewall resulting in both excellent stability and maneuvering in lift mode. The specially designed rim guard provides protection against flats and wheel damage in the rim flange area.

Technologies



Extra Deep Tread

Performance



Cut Resistance



Durability



Handling and Comfort




Stability



Traction

	Tire size	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
										Rec.	Alt.
Ø 9"	6.00 - 9	TT	12	-	STD	168	548	256	1672	4.00 E	-
Ø 10"	6.50 - 10	TT	12	-	STD	195	600	282	1838	5.00 F	5.50 F
Ø 12"	7.00 - 12	TT	14	-	STD	200	692	323	2088	5.00 S	-
Ø 15"	8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	220	715	332	2169	7.00	7 BD
	8.25 - 15	TT	16	-	STD	245	845	395	2434	6.50	7.0

STD: Standard

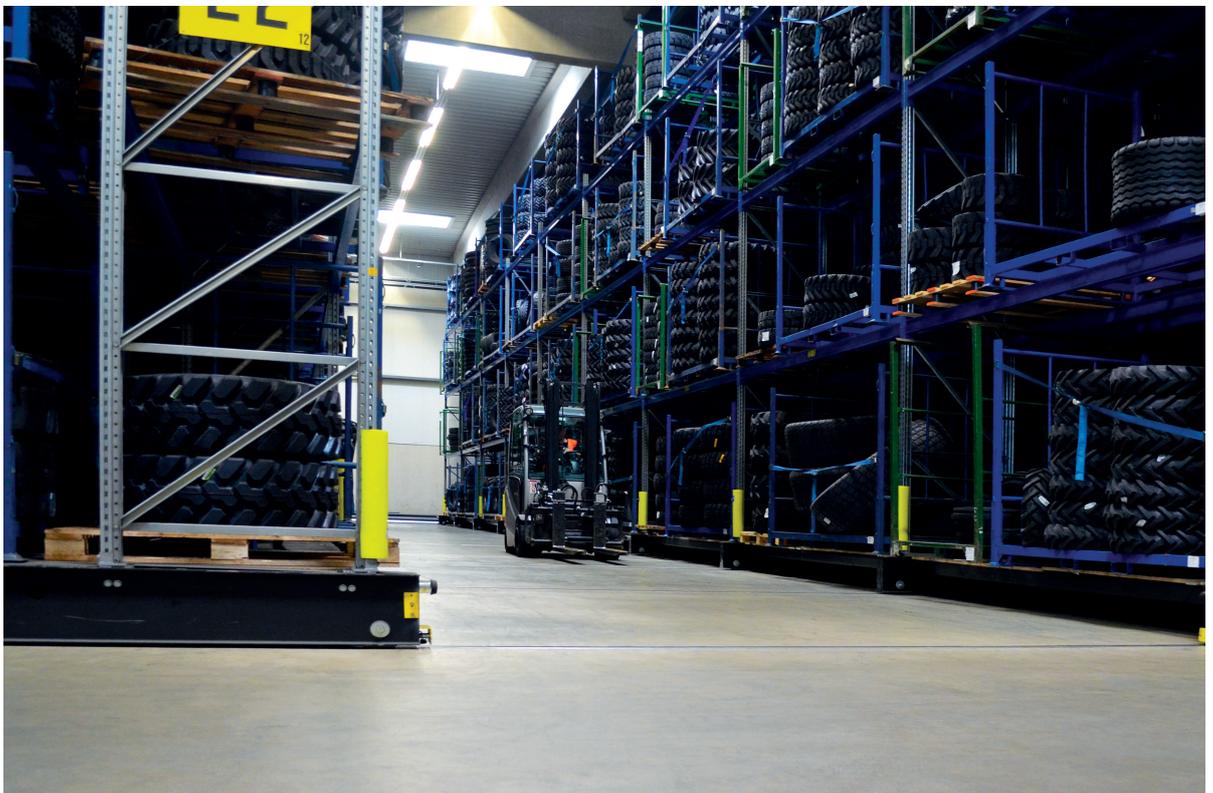

Tolerances: O.D. ± 2% - S.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference