



US standard




GROWING TOGETHER

# EARTHMAX

RADIAL OTR TIRES

## CRUSHER HAUL

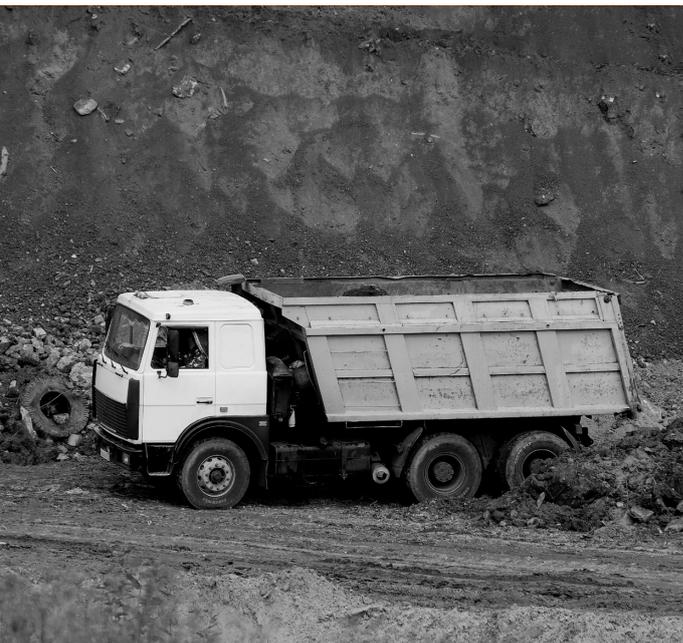

PRODUCT DATA SHEET

**EARTHMAX CRUSHER HAUL**  
RADIAL OTR TIRES



EARTHMAX CRUSHER HAUL is an All Steel radial tire designed for transport applications, both on and off the road, as well as mining operations. It features enhanced durability and mileage along with high load capacity thanks to the strong steel-belted construction and casing. The block-type tread pattern provides excellent traction. In addition, EARTHMAX CRUSHER HAUL ensures excellent riding comfort, less driving fatigue and superior handling.



Radial



**Technologies**



Strong Casing



Steel Belted



All Steel

**Performance**



Durability



Handling and Comfort



High Load Capacity



Traction

	US CODE	Tire size	Type	PR	LI/SS	Version	TRA CODE	TMPH	O.D.	O.W.	SLR	RC	TREAD DEPTH (32nds)	TIRE WEIGHT (lbs)	RIM	
									(In.)	(In.)	(In.)	(In.)			Rec.	Alt.
Ø 20"	94070558	10.00 R 20	TT	18	149/146 J	STD	-	-	41.9	10.7	-	-	25	146	7.50	8.00
	94070565	11.00 R 20	TT	18	152/149 J	STD	-	-	43.4	11.4	-	-	25	154	8.00	8.50
Ø 24"	94075959	12.00 R 24 <b>NEWSIZE</b>	TT	20	160/156 K	STD	-	-	48.4	12.2	22.2	149.0	26	201	8.50	9.00
	94075966	12.00 R 24 <b>NEWSIZE</b>	TL	20	160/156 K	STD	-	-	48.4	12.2	22.2	149.0	26	201	8.50	9.00
	94075973	325/95 R 24 <b>NEWSIZE</b>	TT	20	160/156 K	STD	-	-	48.4	12.2	22.2	149.0	26	201	8.50	9.00
	94075980	325/95 R 24 <b>NEWSIZE</b>	TL	20	160/156 K	STD	-	-	48.4	12.2	22.2	149.0	26	201	8.50	9.00

STD: Standard



Tolerances: O.D. ± 2% - O.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; O.W. = Overall Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference