



IS standard



GROWING TOGETHER

ROCK STAR IND4



PRODUCT DATA SHEET



Bias



ROCK STAR IND4

ROCK STAR PORT IND-4 has been specifically designed for empty container handlers and forklifts. In addition to excellent traction, the unique tread compound provides superior cut and chip resistance. ROCK STAR PORT IND-4 ensures outstanding load capacity and extraordinary durability.

Performance



Cut and Chip Resistance



Durability




High Load Capacity



Traction

	Tire size	Type	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
										Rec.	Alt.
Ø 24"	14.00 - 24	TL	32	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA
	14.00 - 24	TT	32	-	PORT IND	390	1425	635	4350	10.00 W	-
	14.00 - 24	TT	32	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA
	14.00 - 24	TL	32	-	PORT IND	390	1425	635	4350	10.00 W	-
	14.00 - 24	TT	28	-	PORT IND	390	1425	635	4350	10.00 W	-
	14.00 - 24	TL	28	-	PORT IND	390	1425	635	4350	10.00 W	-
	14.00 - 24	TT	28	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA
	14.00 - 24	TL	28	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA

PORT IND: Port Industrial

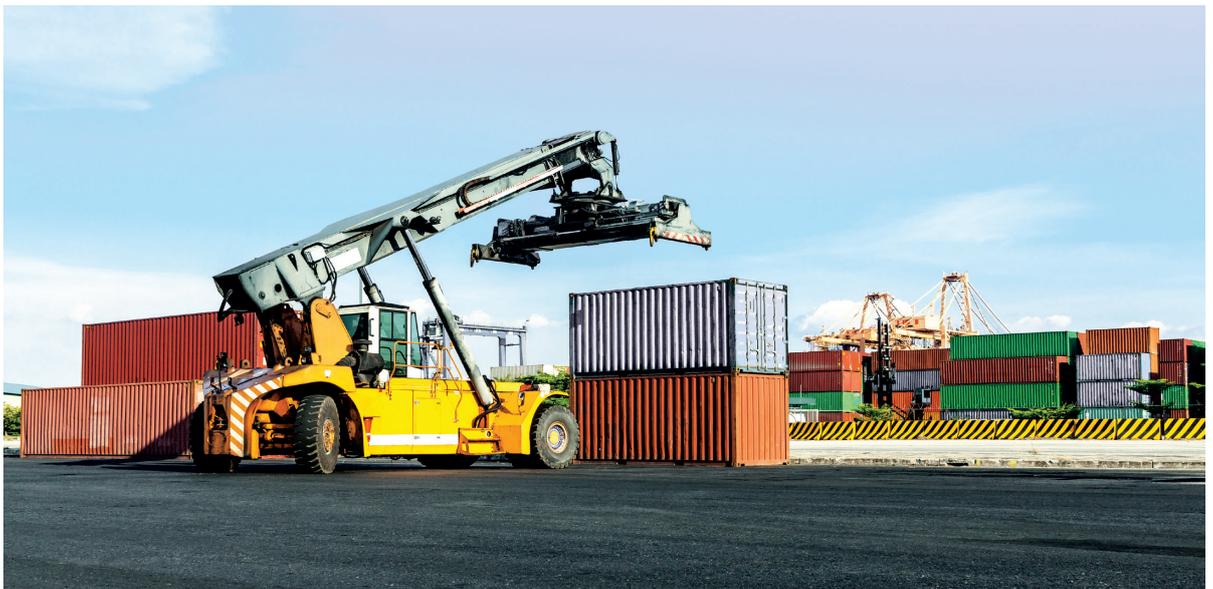

Tolerances: O.D. ± 2% - O.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; O.W. = Overall Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference