



IS standard




GROWING TOGETHER

# EARTHMAX

RADIAL OTR TIRES

## CRUSHER HAUL

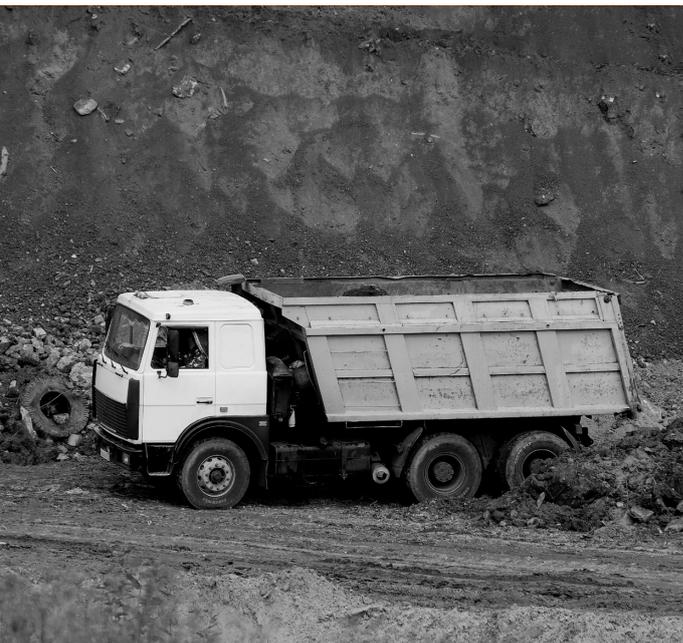

PRODUCT DATA SHEET

# EARTHMAX CRUSHER HAUL

RADIAL OTR TIRES



Radial



EARTHMAX CRUSHER HAUL is an All Steel radial tire designed for transport applications, both on and off the road, as well as mining operations. It features enhanced durability and mileage along with high load capacity thanks to the strong steel-belted construction and casing. The block-type tread pattern provides excellent traction. In addition, EARTHMAX CRUSHER HAUL ensures excellent riding comfort, less driving fatigue and superior handling.

Technologies



Strong Casing



Steel Belted



All Steel

Performance



Durability



Handling and Comfort



High Load Capacity



Traction

	Tire size	Type	TRA CODE	PR	LI/SS	Version	TKPH	O.W.	O.D.	SLR	RC	TREAD DEPTH (mm)	RIM	
								(mm)	(mm)	(mm)	(mm)		Rec.	Alt.
Ø 20"	10.00 R 20	TT	-	18	149/146 J	STD	-	272	1065	-	-	20	7.50	8.00
	11.00 R 20	TT	-	18	152/149 J	STD	-	290	1102	-	-	20	8.00	8.50
Ø 24"	12.00 R 24	TT	-	20	160/156 K	STD	-	310	1230	564	3785	21	8.50	9.00
	NEWSIZE													
	12.00 R 24	TL	-	20	160/156 K	STD	-	310	1230	564	3785	21	8.50	9.00
	NEWSIZE													
	325/95 R 24	TT	-	20	160/156 K	STD	-	310	1230	564	3785	21	8.50	9.00
NEWSIZE														
325/95 R 24	TL	-	20	160/156 K	STD	-	310	1230	564	3785	21	8.50	9.00	
NEWSIZE														

STD: Standard



Tolerances: O.D. ± 2% - O.W. ± 2% - RC ± 2.5% - LI/SS = Load Index / Speed Symbol; O.W. = Overall Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference