



IS standard



GROWING TOGETHER

# MP 590



PRODUCT DATA SHEET



Bias



# MP 590

MP 590 is an agro-industrial tire suitable for loading operations with telehandlers and forklifts. This tire provides good traction and excellent stability as well as increased durability.

## Performance



Durability




Stability



Traction

	Tire size	Type	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM	
										Rec.	Alt.
Ø 22.5"	18 - 22.5 (445/65 - 22.5)	TL	16	-	STD	480	1190	530	3534	14.0	-
	18 - 22.5 (445/65 - 22.5)	TL	20	-	STD	480	1190	530	3534	14.0	-

STD: Standard

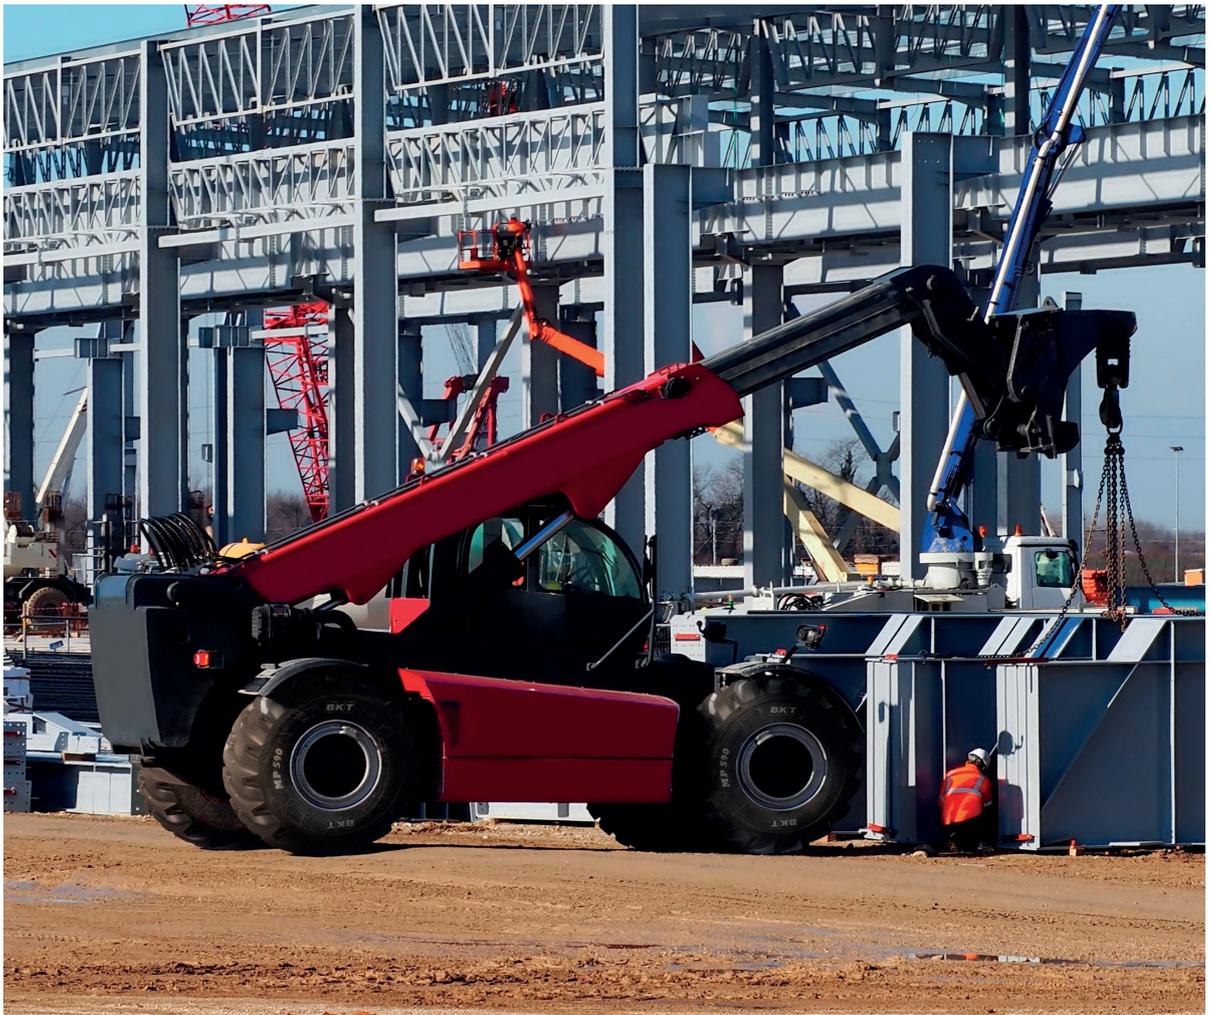

Tolerances: O.D.  $\pm$  2% - S.W.  $\pm$  2% - RC  $\pm$  2.5% - LI/SS = Load Index / Speed Symbol; S.W. = Section Width; O.D. = Overall Diameter; SLR = Static Loaded Radius; RC = Rolling Circumference