



# Simple Lift – Options

## Table of contents

---

**250-OPT1**

Suction frame rotation lock from 90° to 45°

---

**250-OPT2**

Pneumatic suction frame rotation (0 -90°)

---

**250-OPT5**

Vacuum filter

---

**250-OPT6**

Suspension point adjustable pneumatically

---

**250-OPT7**

Suspension point adjustment manually

---

**250-OPT10**

Ejector modules in each suction cup

---

**250-OPT11**

Control arm extension (pneumatic)

---

**250-OPT14**

50 mm Offset bars to extend suction cups from suction frame

---


# Lifting your productivity

## Simple Lift Option 250-OPT1

### Suction frame rotation lock from 90° to 45°

#### Key features:

- Compatible with the lifting devices equipped with manual suction frame rotation.
- Enables unrestricted manual rotation of the suction frame with lock positions at every 45°, instead of the standard 90° increments.

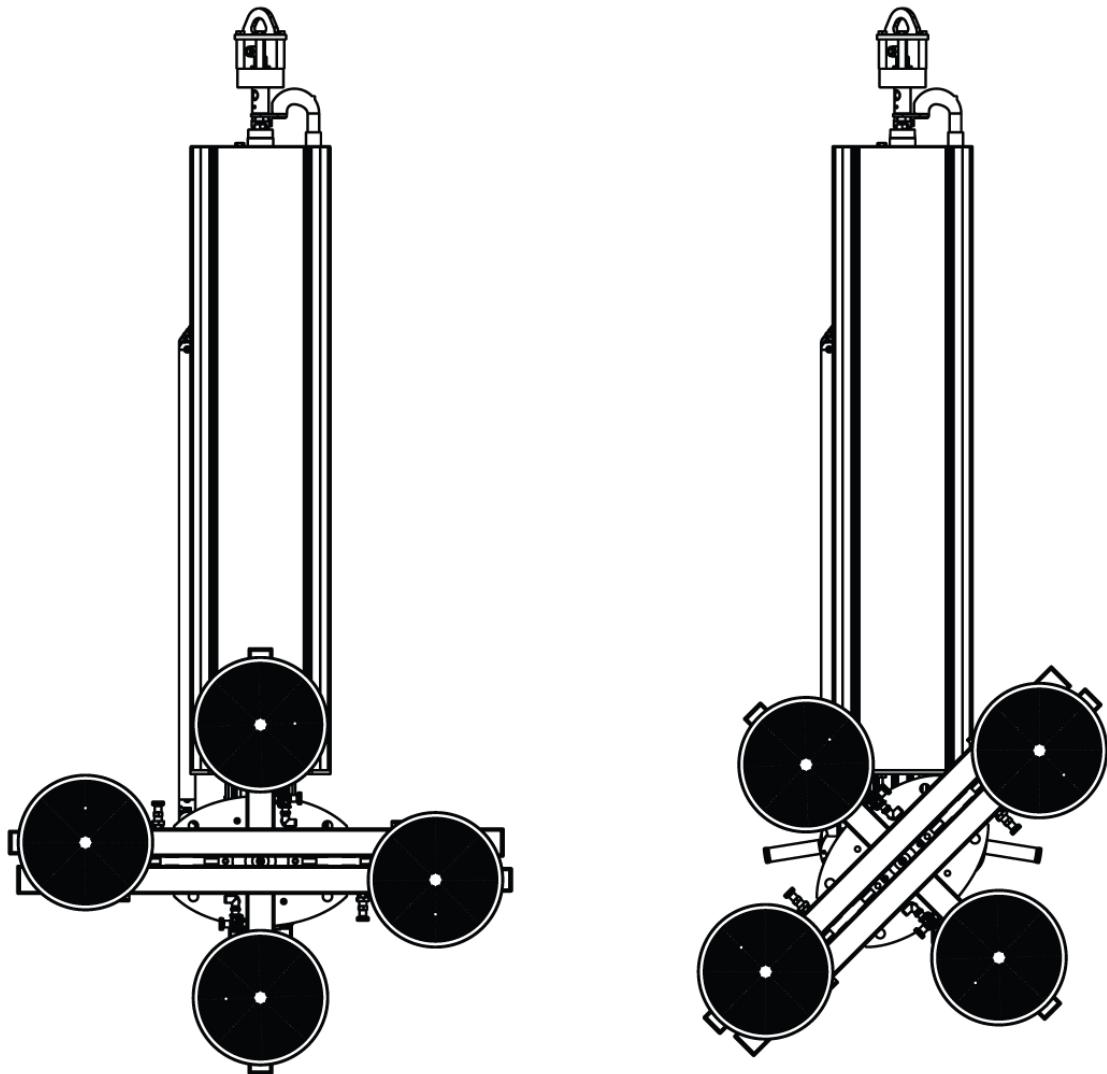




# Lifting your productivity

## Simple Lift Option: 250-OPT2

### Pneumatic suction frame rotation (0-90°)

#### Key features:

- Pneumatic suction frame rotation from 0 to 90 degrees
- Hold-to-run control. Movement occurs only while the button is held down.
- The buttons are located on the control panel.
- The glass must be gripped at its center to ensure controlled operation of the pneumatic rotation.

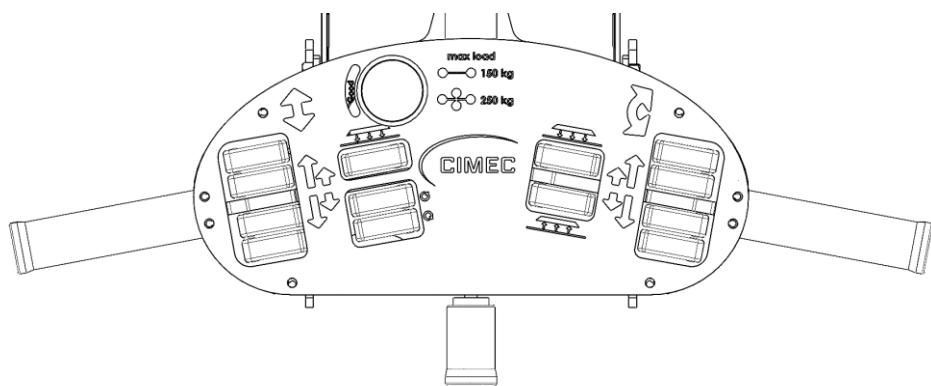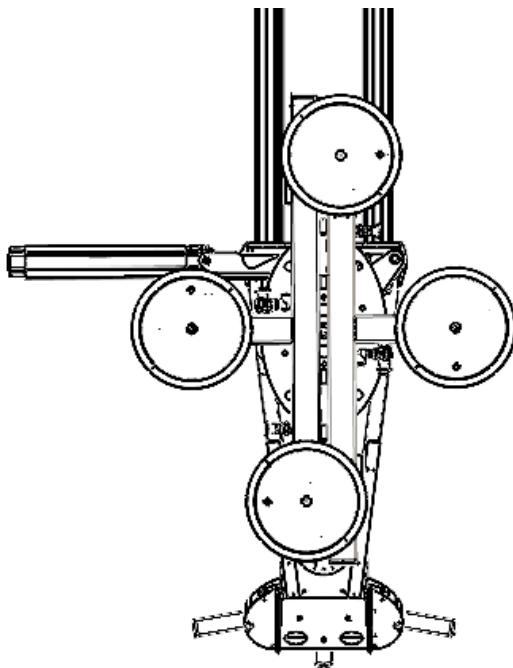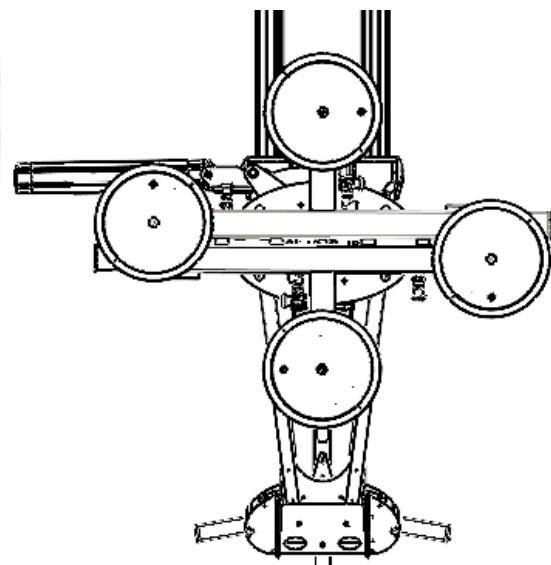

# Lifting your productivity

## Simple Lift Option: 250-OPT5

### Vacuum filter

#### Key features:

- Vacuum filter for separating dust and dirt from the vacuum system.




# Lifting your productivity

## Simple Lift Option: 250-OPT6

Suspension point adjustable pneumatically

### Key features:

- Suspension point adjustment for tilting the entire lifting device
- Hold-to-run control. Movement occurs only while the button is held down.
- The tilt angle of the lifting device differs when unloaded and when under load.

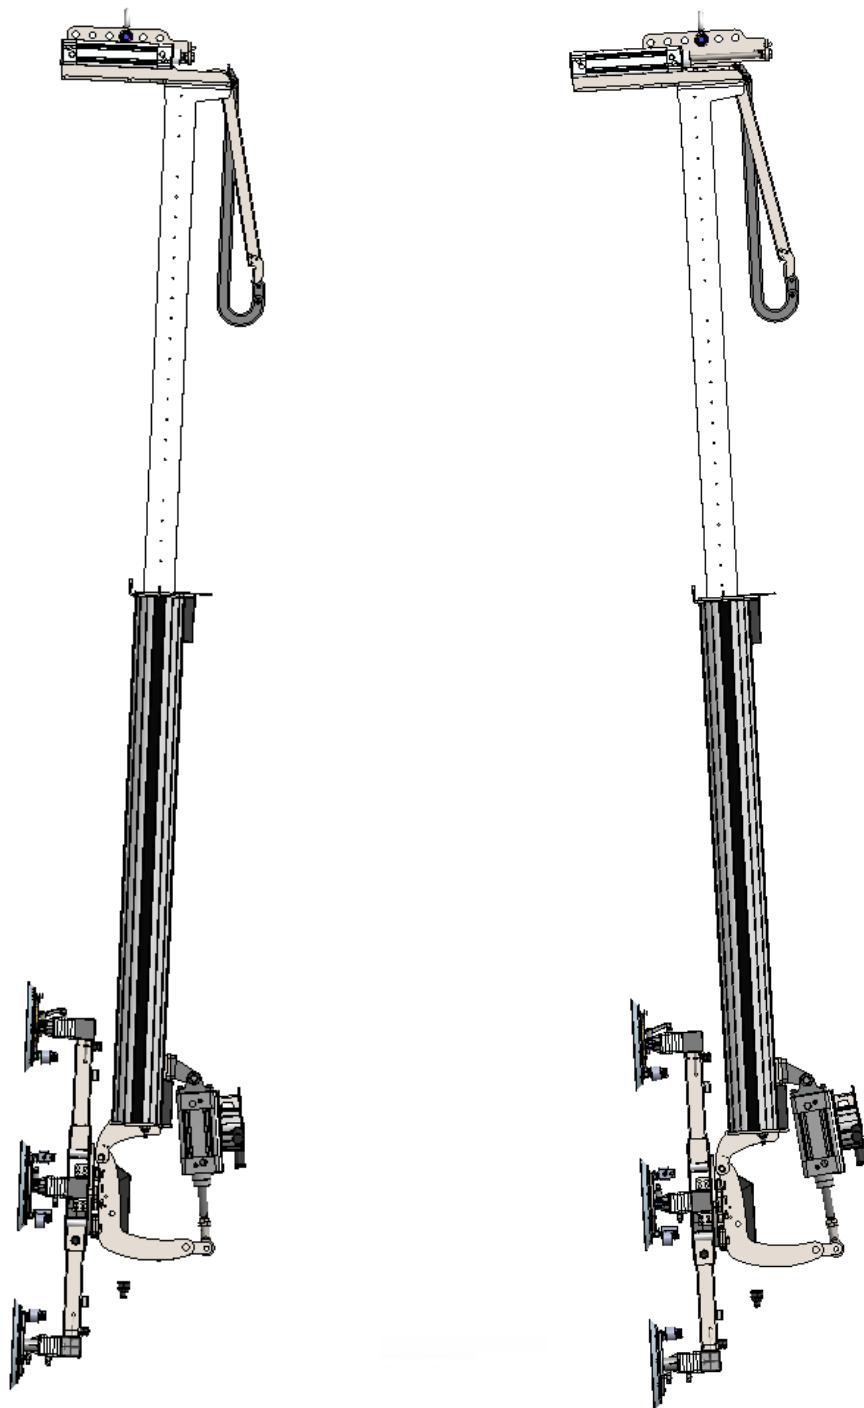


# Lifting your productivity

## Simple Lift Option: 250-OPT7

### Suspension point adjustment manually

#### Key features:

- *Manual adjustment of the suspension point.*
- *The adjustment allows the lifting device to be tilted to meet the requirements of the application. The tilt angle of the lifting device differs when unloaded and when under load.*
- *Designed to be adjusted during the lifting device installation by the mechanics.*

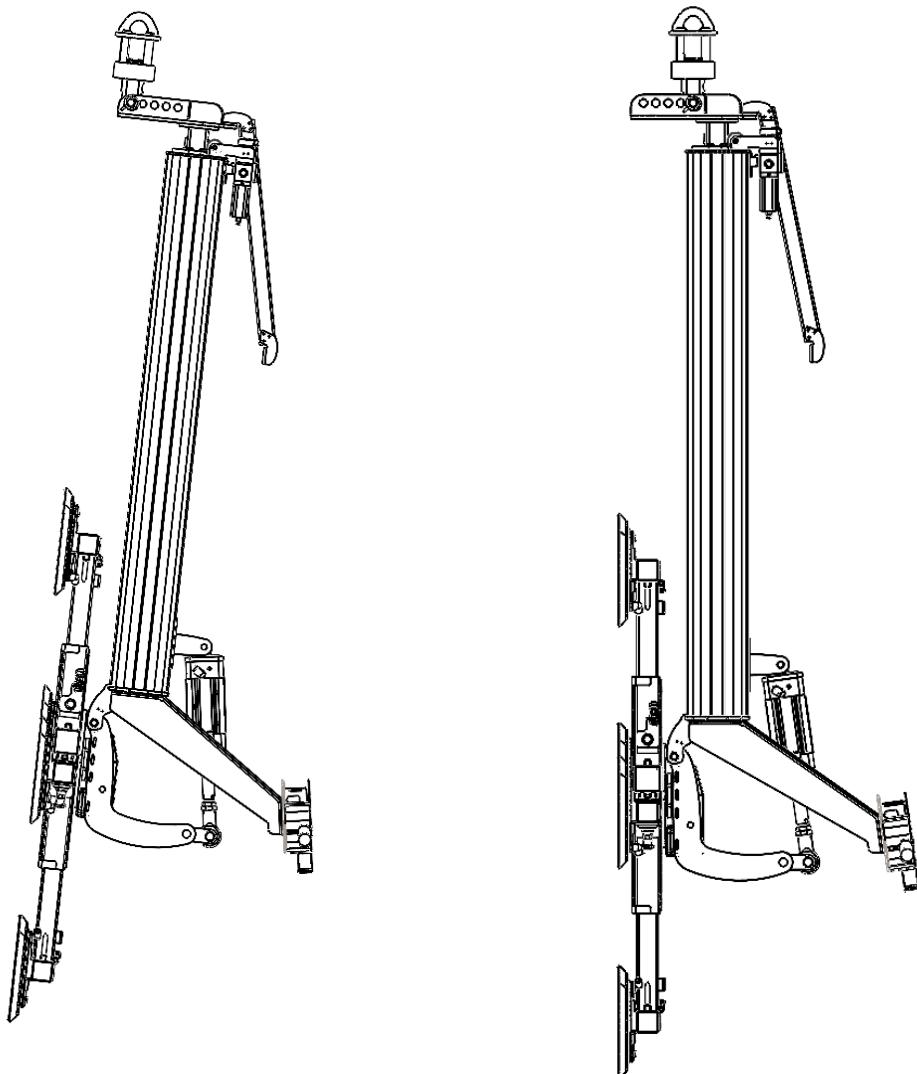


# Lifting your productivity

## Simple Lift Option: 250-OPT10

### Ejector modules in each suction cup

#### Key features:



- Ejector module in each suction cup allows lifting glass elements of different shapes so that some of the suction cups can be positioned outside the glass element
- Each module has vacuum gauge

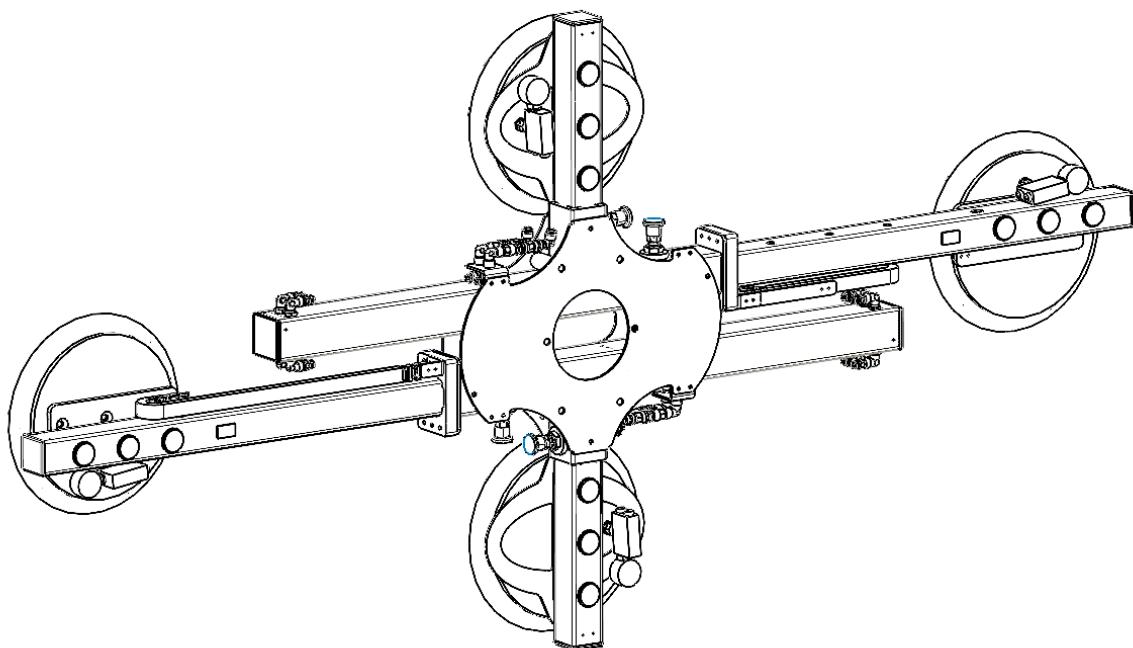

# Lifting your productivity

## Simple Lift Option: 250-OPT11

Control arm extension (pneumatic)

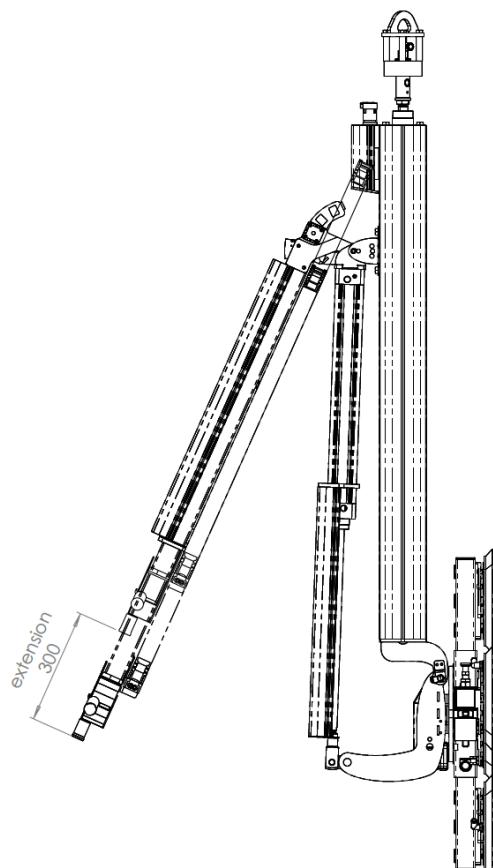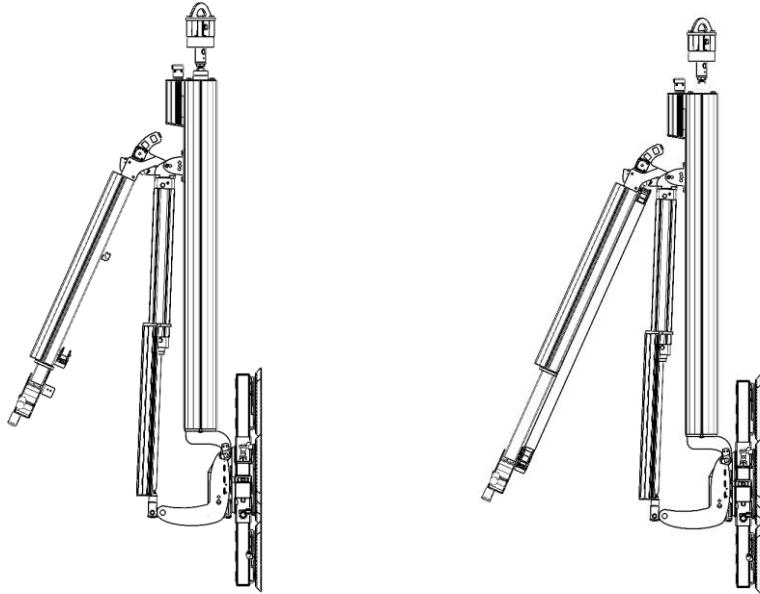

# Lifting your productivity

## Simple Lift Option: 250-OPT14

**50 mm Offset bars to extend suction cups from suction frame**

### Key features:

*50 mm Offset bars to extend suction cups from suction frame*

