

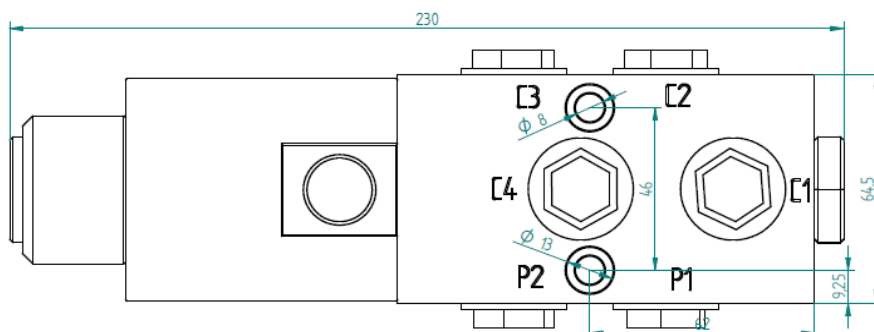

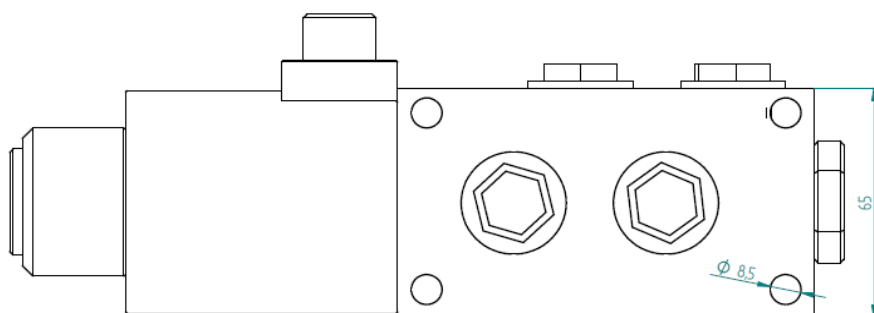


Solenoid controlled 6/2 directional valve, for serial connection

- connection R3/4"
- voltage 12VDC or 24VDC (36W)
- flow 80 l/min
- max. pressure 210 bar
- closed intermediate position

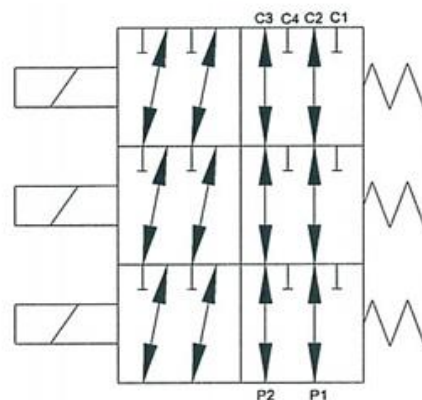

Piippo Hydraulic: Yrittäjätie 10, FI-74700 Kiuruvesi FINLAND phone +35817750500