
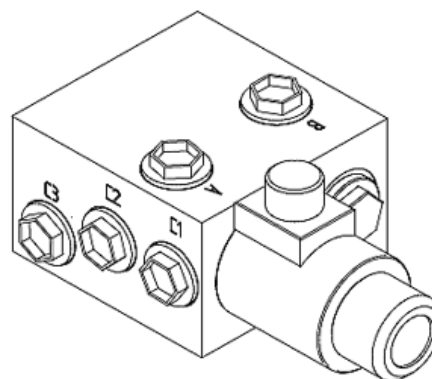
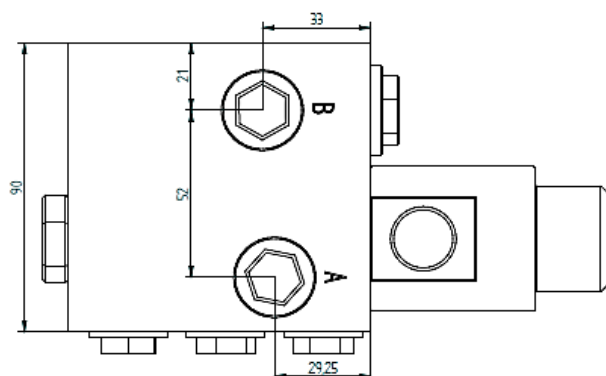
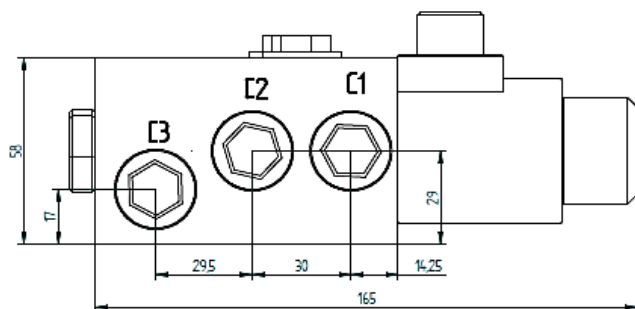
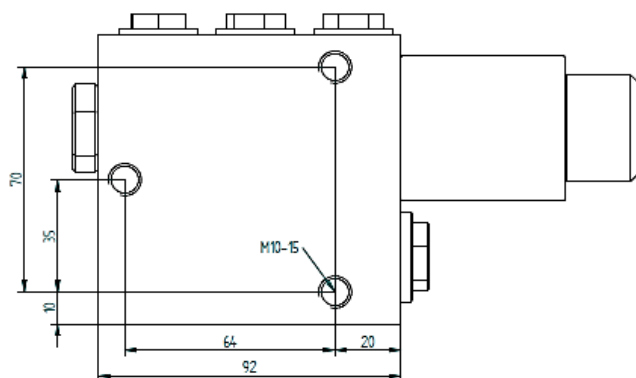


Solenoid controlled 6/2 directional valve, with flow divider

- connection R3/8"
- voltage 12VDC or 24VDC (30W)
- flow 50 l/min
- max. pressure 210 bar
- suitable for example for sideshift of forklifts

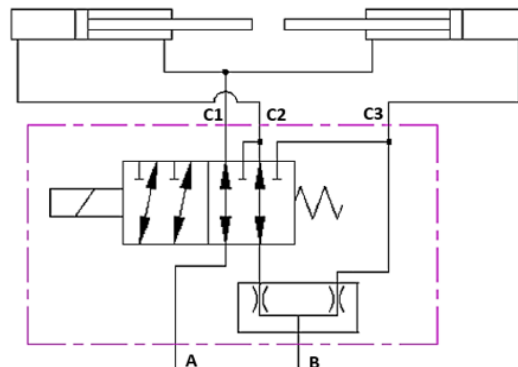

Piippo Hydraulic: Yrittäjätie 10, FI-74700 Kiuruvesi FINLAND phone +35817750500