
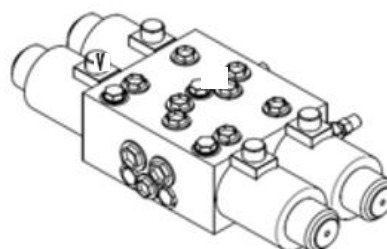
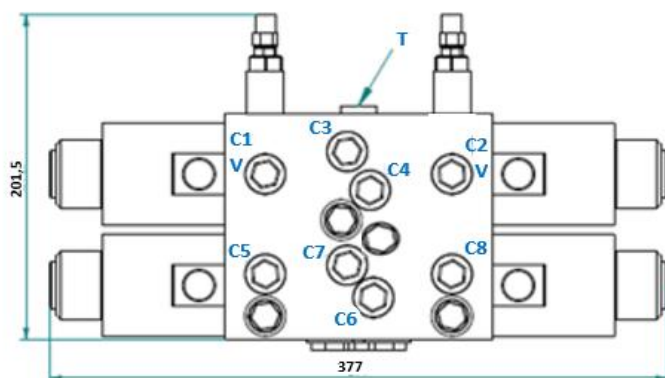
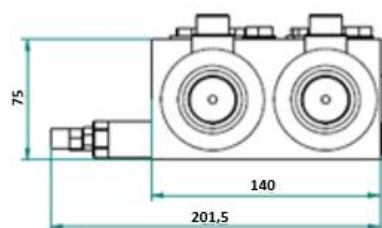
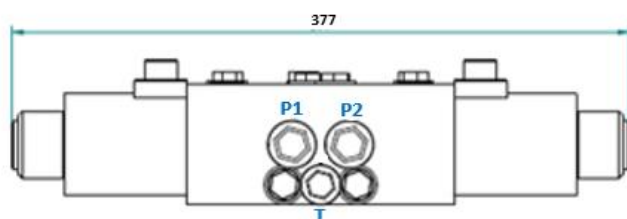
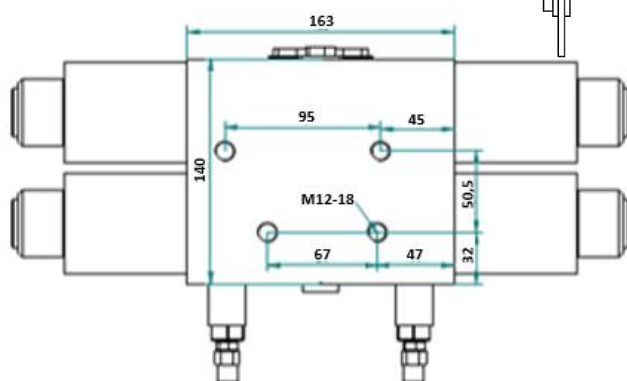


Solenoid controlled 8/3 directional valve

- connection R1/2"
- voltage 12VDC or 24VDC (36W)
- flow 75 l/min
- max. pressure 210 bar
- adjustable shock relief valves in ports C1 and C3
- fixed shock relief valves with inlet valves in ports C2, C4, C5, C6, C7 and C8
- tank/pressure accumulator connection T

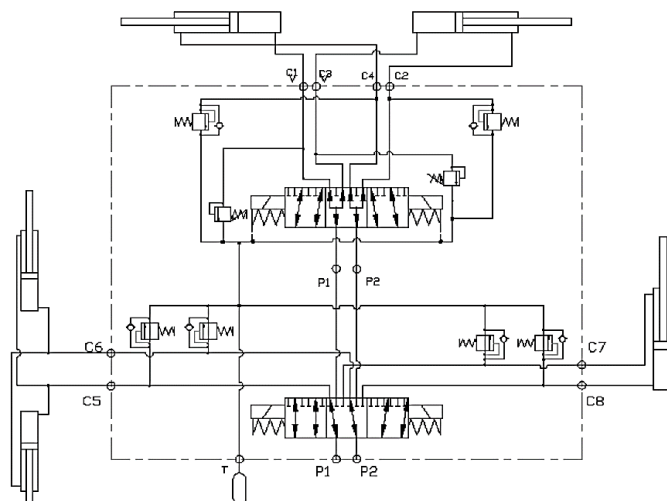

Piippo Hydraulic: Yrittäjätie 10, 74700 Kiuruvesi FINLAND tel. +35817750500