


## ST ADAPTER


### Features

- Single mode and Multimode
- Zirconia sleeves or Phosphor bronze sleeves
- NTT standard compatible
- Available without flanges or with flange for duplex, saving panel space
- SC2 8Port high density for patch panel mount applications
- Meet JIS5974 and bellcore GR-326 standard
- Compliant with IEC874-14 & IEC874-19
- All parts compliant with ROHS



### Application

- Telecommunication
- CATV
- LAN & WAN
- Network
- Broadband
- FTTP

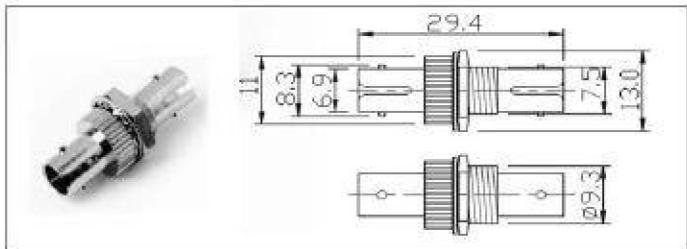

### Appearance & Dimension

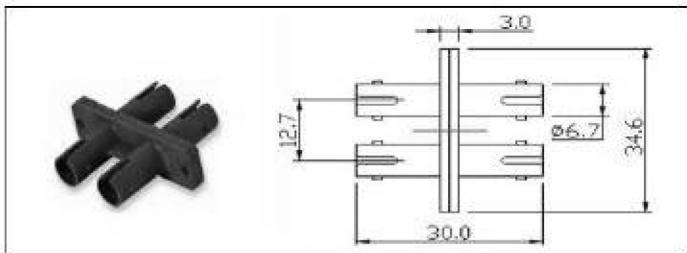
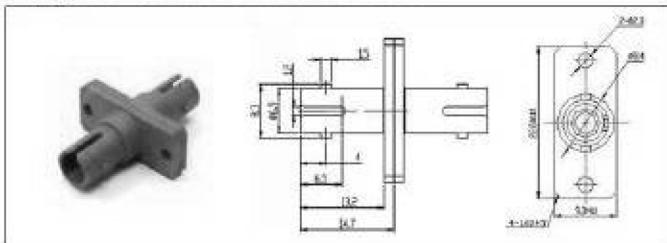


Figure4. ST SC Footprint simplex Plastic Adaptor

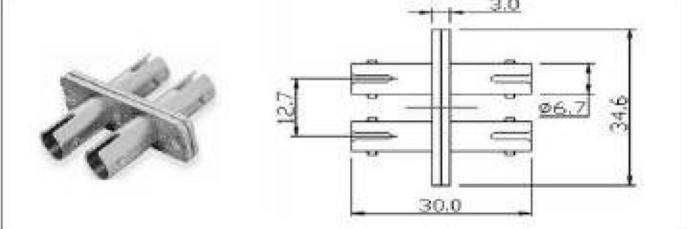
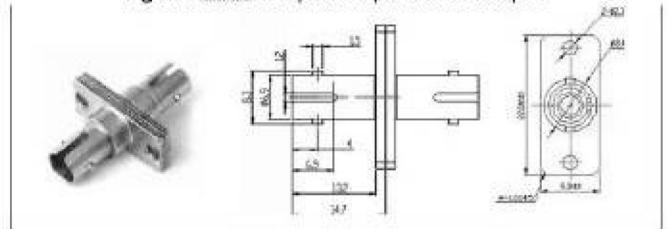


Figure5. ST SC Footprint simplex Metal Adaptor

Figure3. ST SC Footprint Duplex Metal Adaptor

### Parameter

Product	ST Adapter	
Mode	S.M(Zroz)	M.M(P.B)
Insertion Loss	≤0.2dB	≤0.3dB
Return Loss	≥45dB	---
Mating Durability(500 timer)	Additional Loss≤0.1dB, Return Loss Variability<5dB	
Temperature Stability(-40°C ~ 85°C)	Additional Loss≤0.2dB, Return Loss Variability<5dB	
Operating Temperature	-40°C ~ +85°C	
Storage Temperature	-40°C ~ +85°C	

BUY ON

**www.cablematic.com**