

①




Products and accessories display




②


Install the hole according to the product installation hole size

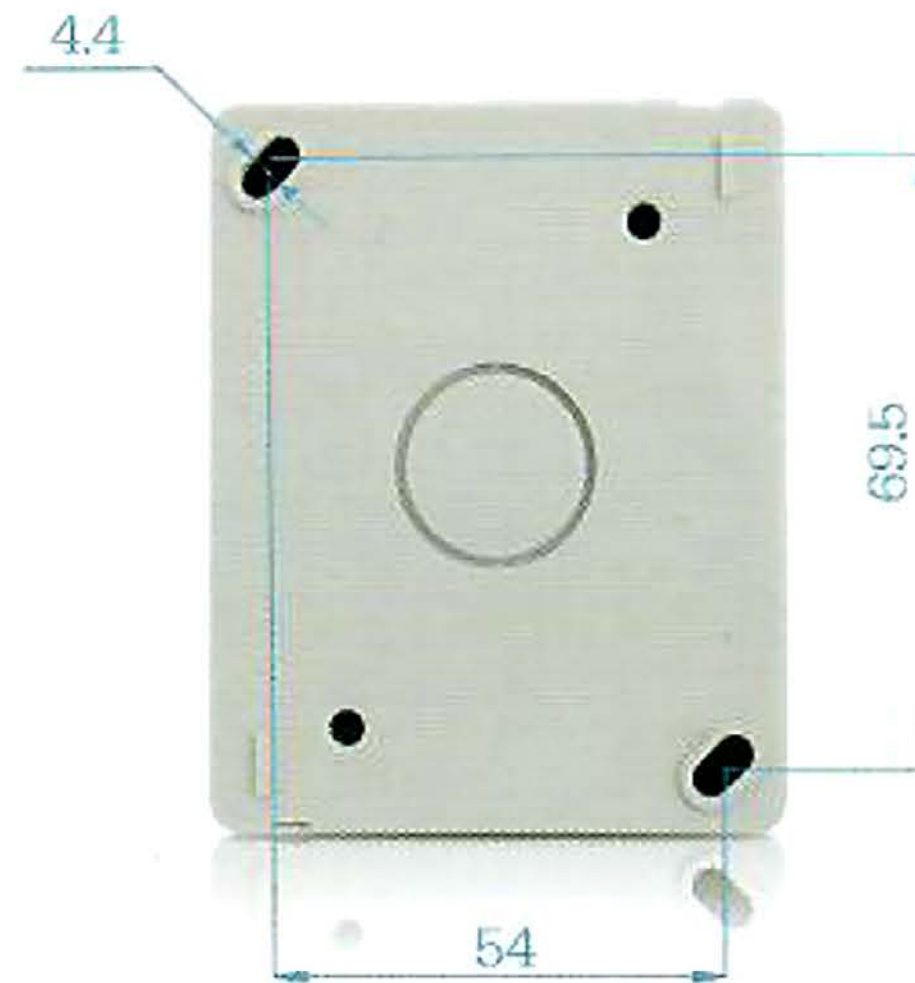

- ③ Drill holes in the installation position
insert the plastic expansion member
secure the base with long screws

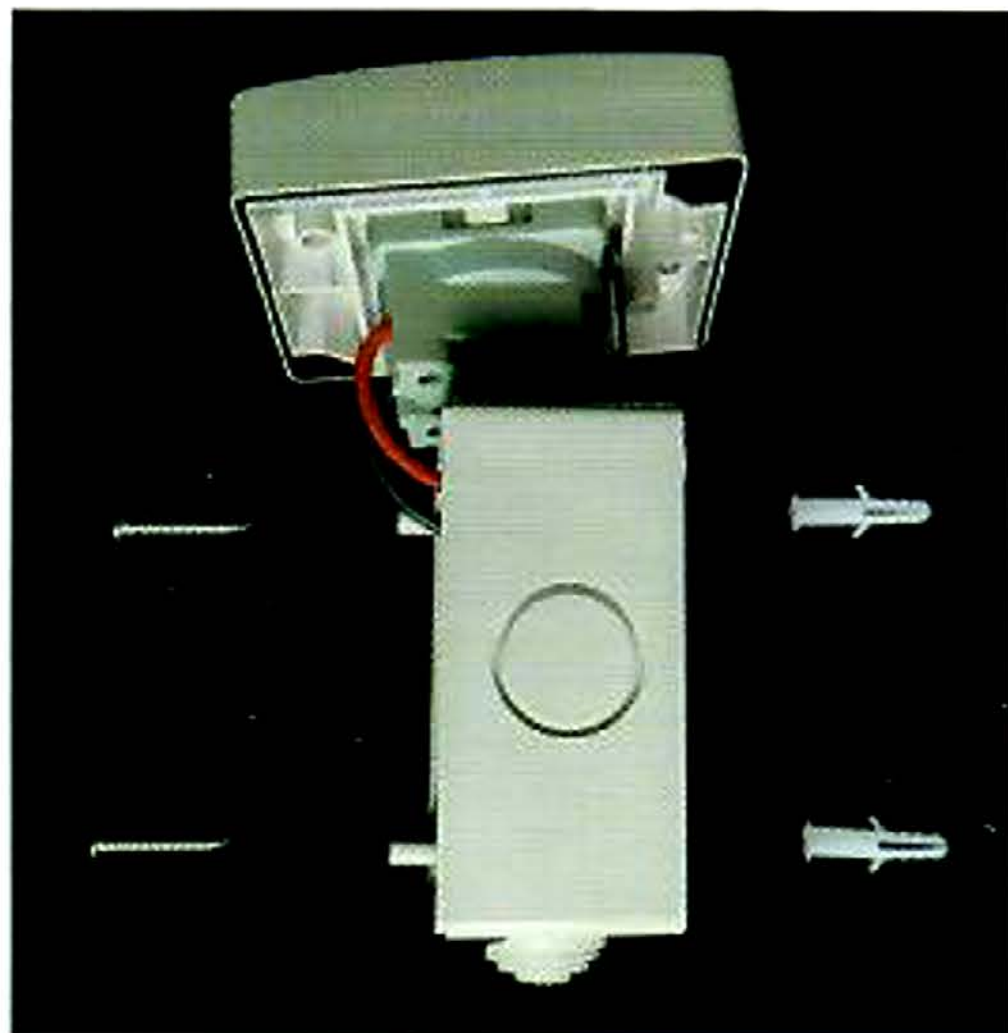



- ④ Pierce the rubber stopper with a screwdriver
then put power cable in

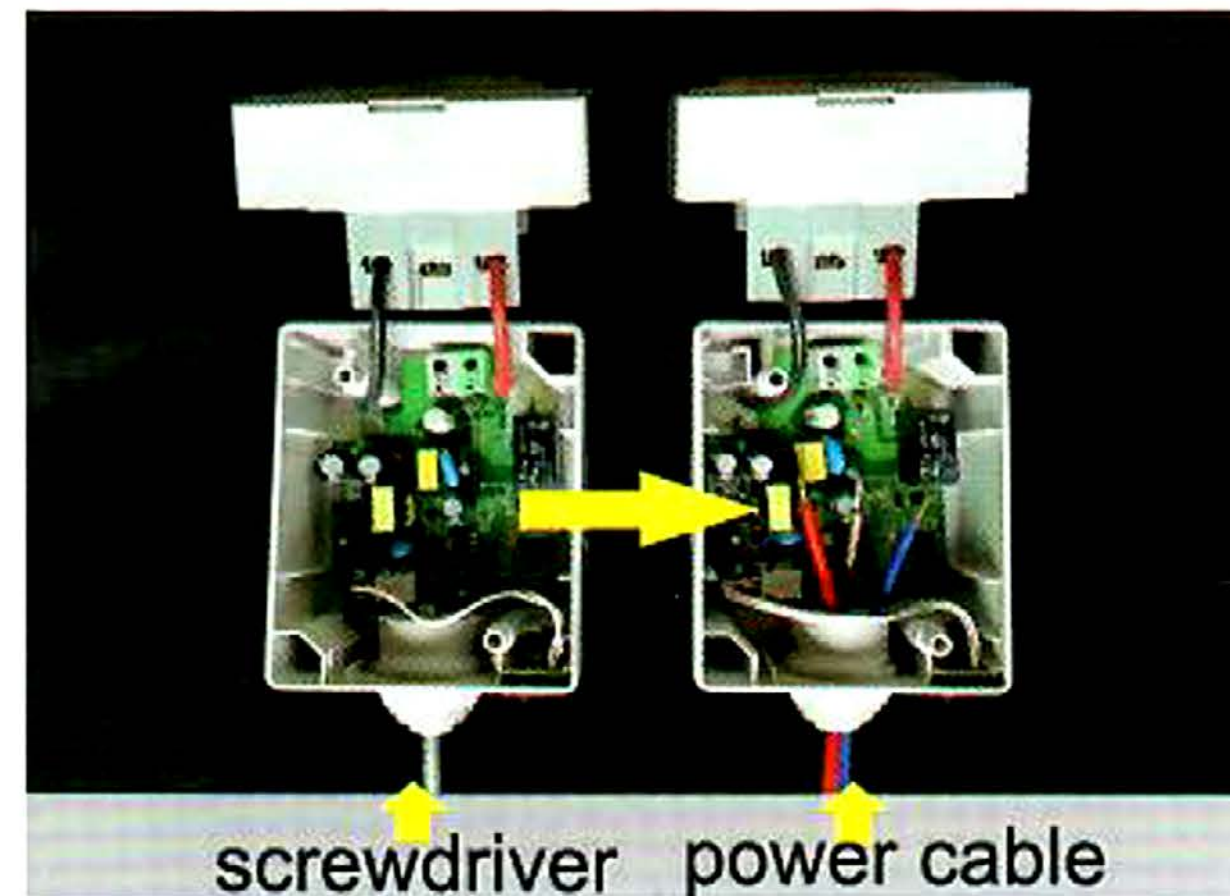

⑤

Connect the wire to the appropriate location

It will be locked When you put the N and L in the hole
Use a screwdriver to press it down when you pull it out

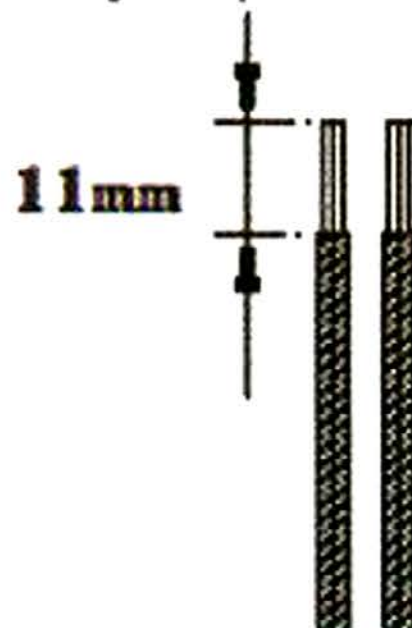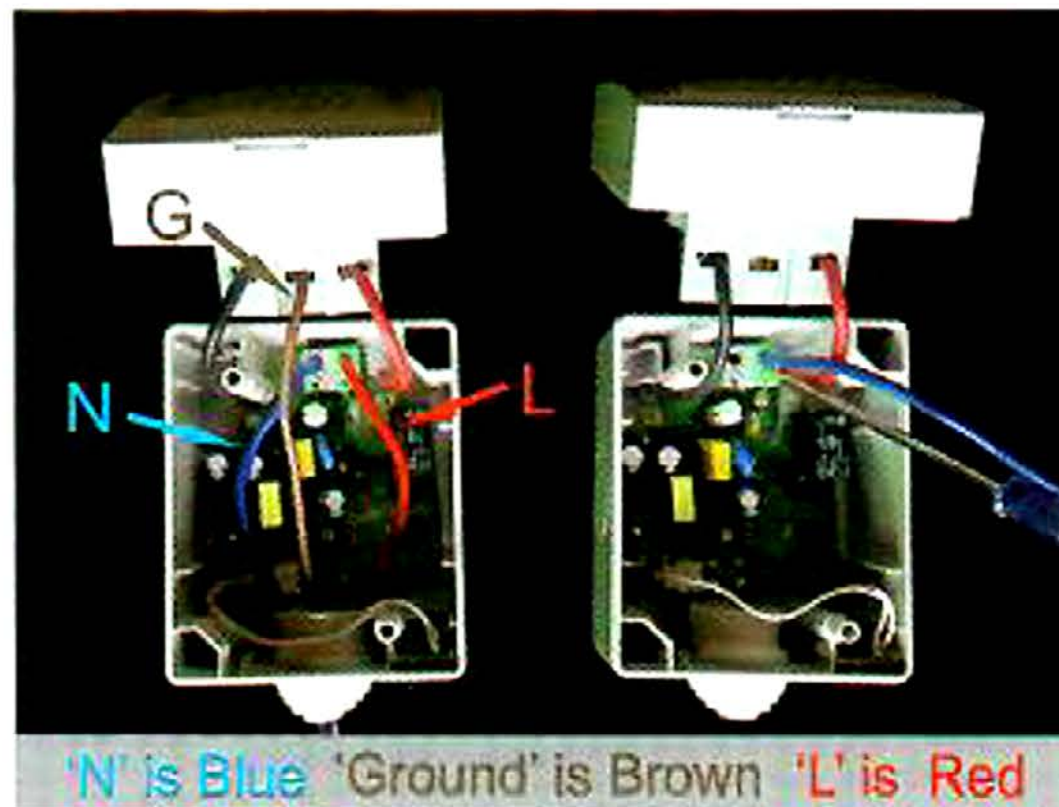

Cut the wire
around 11mm

⑥

Tighten the two short screws,
the installation is complete

