

Wifi Water Leakage Detector

User Manual



Specifications:

Input voltage: DC3V LR03

Static current: $\leq 5\mu\text{A}$

Alarm current: $\leq 150\text{mA}$

Low-Voltage indication: $\leq 2.4\text{V}$

WiFi: 802.11 b/g/n

Installation: Wall-mounted

Detection: Water-sensor detector

Working Temperature: $-10^{\circ}\text{C} - +50^{\circ}\text{C}$

Working Humidity: 95%RH

* Please read this manual carefully before use
and keep it for future reference.

01

02

How to use:

1. Push the mounting bracket upward and take out the bracket, then insert the battery.




2. Put the battery into the battery bin and place it according to the graphics in the battery bin. After two batteries are loaded, the indicator lights are always on and then off.

3. Download Smart Life APP in app store or google play store, or scan the following QR code



iOS / Android

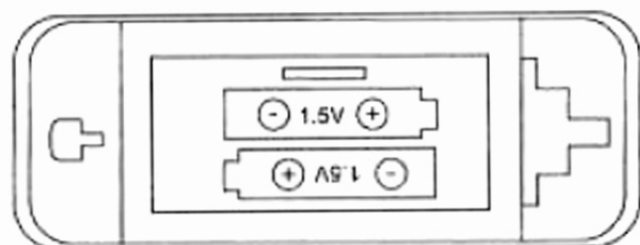

03

04

4. Register with mobile phone number, click "Home" interface "+" or click "Add Devices" in the middle blank.

Select the Security & Sensors and click on the Sensor (Wi-Fi).



05

5. Enter the WiFi password according to the prompt and click to confirm.



06

6. With the card pick-up pin in the accessory package, hold the reset key for more than 5 seconds, and the indicator flashes into the automatic network connection mode.

7. Network pairing successfully, click Water-Drop button and enter the interface. Put the probe into water, Water leakage logo will show: Water is water, APP will remind you the Water leak alarm; Take it out, APP will remind you the Water leak normal.



07



08