


Rev	Modification Content	Date	Validate
A	the First Edition	2007-12-20	Cindy

**ROHS**

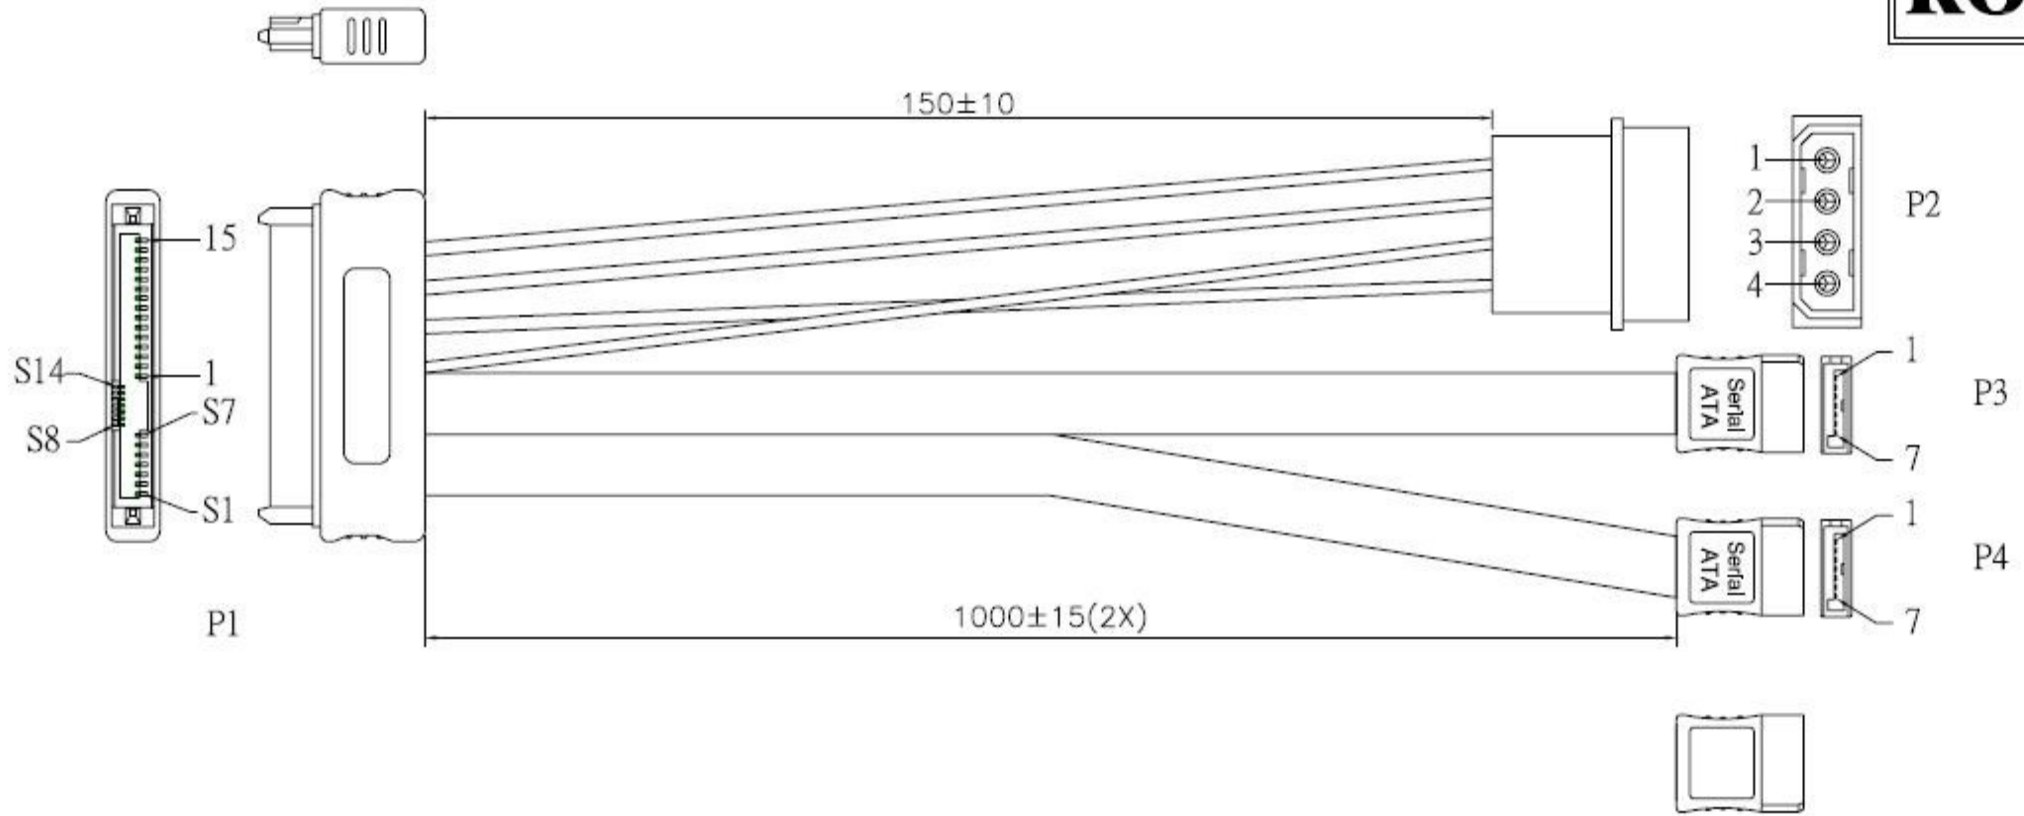

測試要求：

1. 成品需做100%電氣測試,不得有任何斷路/短路,錯位,電器閃爍.
2. 絕緣&導通阻抗:5M Ω/Min& 5 Ω/Max .
3. 測試電壓：DC 300V.

包裝方式：

單PCS產品裝PE袋熱封口.


P/N	SAS 29PIN/SATA 7P*2+大4P HSG		
Item	AFA15220100		
Drawn By	Cindy	Customer NO.	AS46 N
Audited By		Unit : mm	
Date	2007-12-20	Rev. : 1.00	ME

Rev	Modification Content	Date	Validate
A	the First Edition	2007-12-20	Cindy

**ROHS**

Pin Assignment:

P1	P2
4+5+6	3
7+8+9	4
10+11+12	2
13+14+15	1

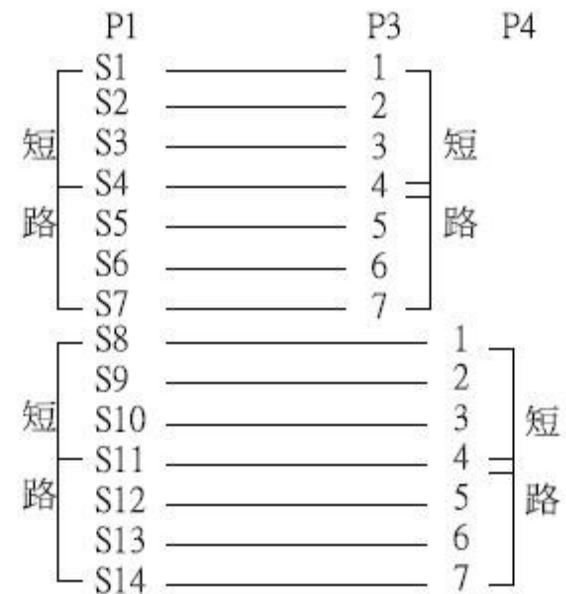

12	Carton	44*30*25cm K=K	pcs
11	PE Bag	(13"+19")*26"*0.05cm	pcs
10	Clapboard	42*28mm	1/10pcs
9	PE Bag	W=175mm*L=220mmd需印環保標籤	1 pcs
8	Molding	PVC 內模料	8 g
7	Molding	PVC 35P COLOR:BLACK	20 g
6	Terminal	大4P TINNED MALE TERMINAL	4 pcs
5	Housing	大4P WHITE FEMALE HOUSING	1 pcs
4	Connector	SATA 7P FEMALE 鉚壓式 PIN GOLD FLASH	2 pcs
3	Connector	SAS 29PIN FEMALE 焊線式 PIN GOLD FLASH	1 pcs
2	Cable	UL 1007 20 AWG COLOR:RED*1,YELLOW*1,BLACK*2	175mm
1	Cable	UL 2725 SERIAL ATA CABLE 26AWG(1/0.4TC)*2P+AL/MY+28AWG(1/0.32TC)*3C, OD=2.2*7.8±0.1mm,JACKET:BLUE 印黑字	1025*2mm
NO.	P/N	DESCRIPTION	QTY

P/N	SAS 29PIN/SATA 7P*2+大4P HSG		
Item	AFA15220100		
Drawn By	Cindy	Customer NO.	AS46 N
Audited By			Unit : mm 
Date	2007-12-20	Rev. : 1.00	ME