



P1

P2

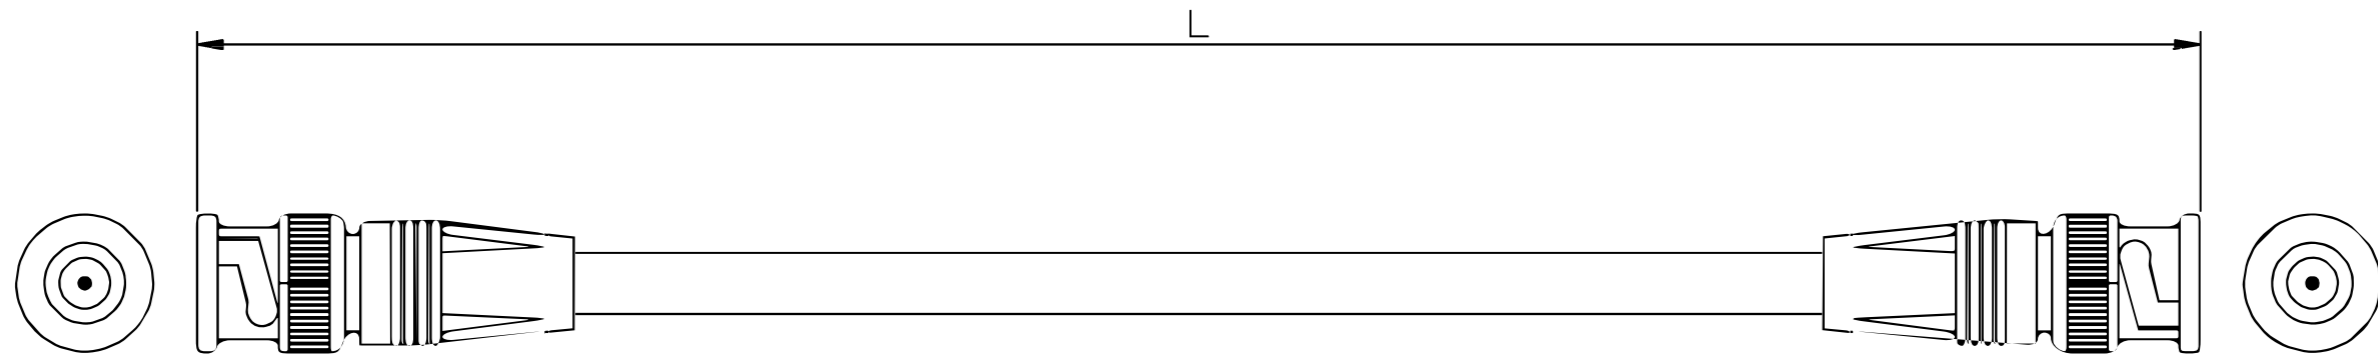

PIN ASSIGNMENT:

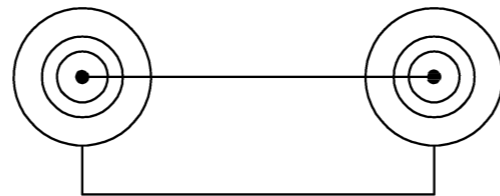


NOTES:

- 1.100% OPEN & SHORT TESTING
- 2.VOLTAGE:300V DC
- 3.INSULATION RESISTANCE:20M ohm
- 4.CONTACT RESISTANCE: 1 ohm

CUSTOMER P/N	length
BN061	250MM ± 20MM
BN062	500MM ± 20MM
BN063	1000MM ± 30MM
BN064	2000MM ± 50MM
BN065	3000MM ± 50MM
BN066	5000MM ± 80MM
BN067	10000MM ± 150MM
BN068	15000MM ± 200MM
BN069	20000MM ± 200MM



Title: SDI6 COAXIAL CABLE BNC M/M



Customer: Page:1/1 Drawn BY:CLR

Customer P/N: REV:A Check BY:DYH

Date:2020. 08. 22 Drawing NO.: FSDI0601 Unit:mm Appd BY:

NO.	Material	Description
6		
5		
4		
3	45Pa PVC BLACK	
2	BNC PLUG	
1	6G-SDI 75Ω COAXIAL CABLE 18AWG (1/1.05BC)+ AL + 128B OD:7.0MM BLACK	