


| Rev | Modification Content | Date | Validate |
|-----|----------------------|------------|----------|
| A | the First Edition | 2006-11-30 | Cindy |

ROHS

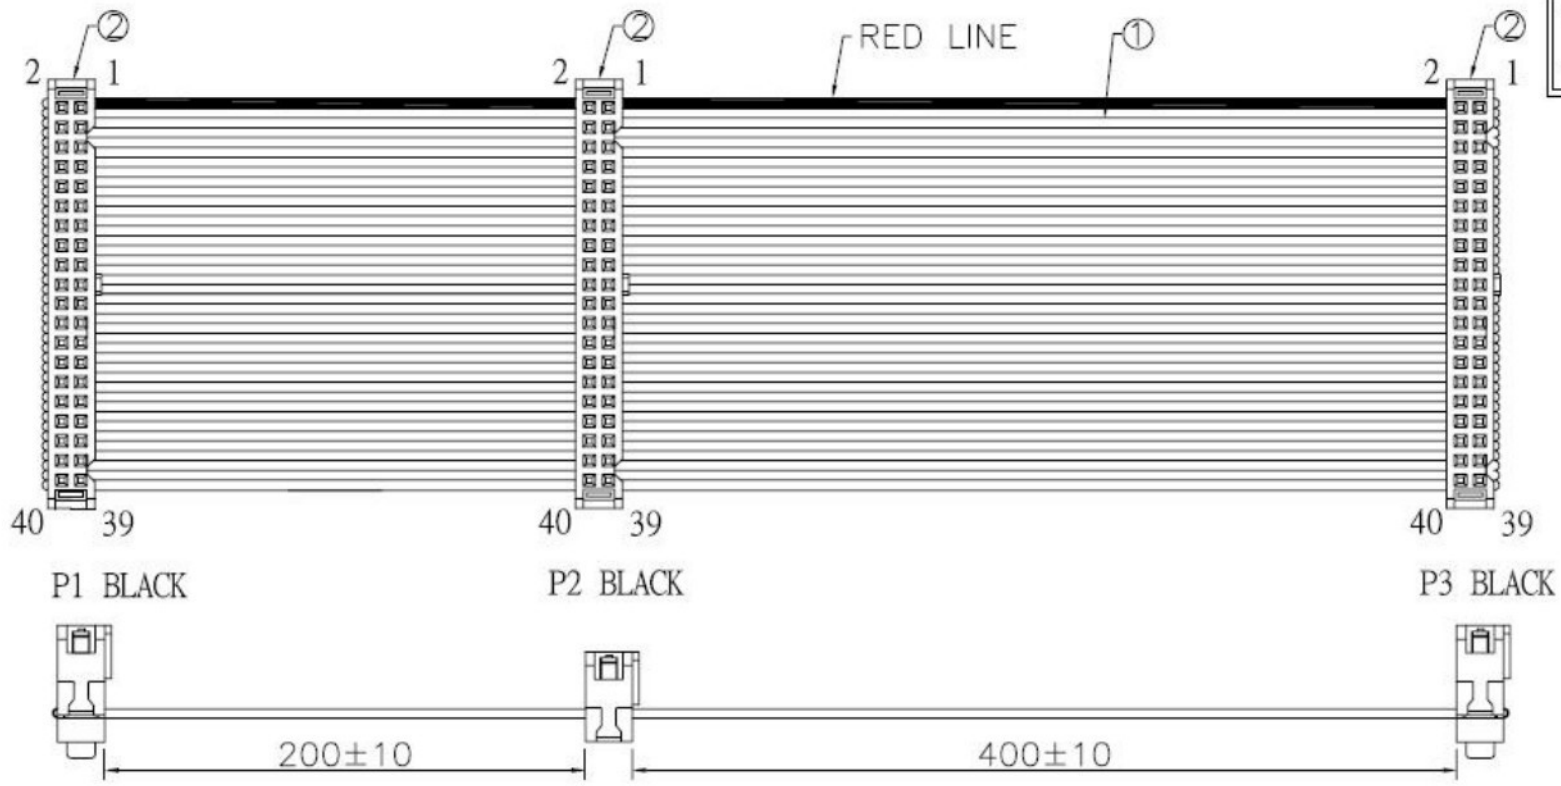

ELECTRICAL CHARACTER:
 1. 100% OPEN/SHORT;
 2. INSULATION RESISTANCE: 5M OHMS;
 3. CONTACT RESISTANCE: 5 OHMS.

Pin Assignment:

| P1 | P2 | P3 |
|----|----|----|
| 1 | 1 | 1 |
| 2 | 2 | 2 |
| 3 | 3 | 3 |
| 4 | 4 | 4 |
| . | . | . |
| . | . | . |
| . | . | . |
| 36 | 36 | 36 |
| 37 | 37 | 37 |
| 38 | 38 | 38 |
| 39 | 39 | 39 |
| 40 | 40 | 40 |

CD03

| | | | | |
|------------|---------------|--------------|----|-----------|
| P/N | FC40P 3H 60CM | | | |
| Item | AFA40030060 | | | |
| Drawn By | Cindy | Customer NO. | NO | N |
| Audited By | | | | Unit : mm |
| Date | 2006-11-30 | Rev.: 1.00 | ME | |

| 2 | Connect | IDC 40P 有耳無塞黑色 (P1/P3三件, P2二件) PH:2.54*2.54MM | 3 set |
|-----|---------|---|-------|
| 1 | Cable | UL2651 28AWG*40C PH1.27MM GRAY PVC FLAT CABLE | 1 pcs |
| NO. | P/N | DESCRIPTION | QTY |