


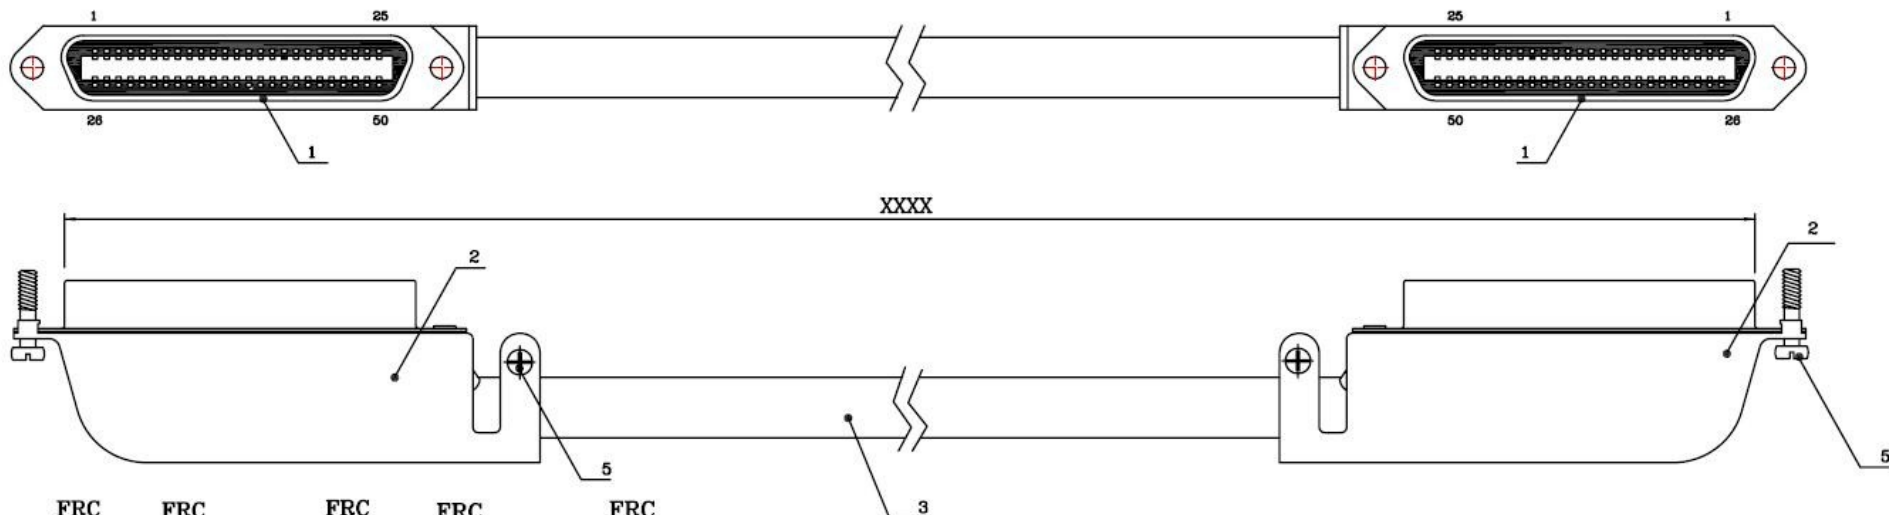

FRC 50P(F)	FRC 50P(F)	FRC 50P(F)	FRC 50P(F)	FRC 50P(F)	FRC 50P(F)
1	1	12	12	23	23
26	26	37	37	48	48
2	2	13	13	24	24
27	27	38	38	49	49
3	3	14	14	25	25
28	28	39	39	50	50
4	4	15	15	SHELL	SHELL
29	29	40	40		
5	5	16	16		
30	30	41	41		
6	6	17	17		
31	31	42	42		
7	7	18	18		
32	32	43	43		
8	8	19	19		
33	33	44	44		
9	9	20	20		
34	34	45	45		
10	10	21	21		
35	35	46	46		
11	11	22	22		
36	36	47	47		

9050-08-08-22-XXXX-1

Length Unit:CM

Length Unit:CM	Tolerance
< 50	± 2
50-100	± 3
101-150	± 4
151-300	± 5
301-500	± 6
> 500	± 10

• **RoHS**

• 100% OPEN / SHORT / INSULATING TEST

• INSULATION TEST: 2MΩ

2		
1		
NO.	DATE	MODIFICATION
		APPROVED BY: DATE:
		CHECKED BY: DATE:
		SALES: DATE:
		NAME:
		SCALE: X:1 UNIT: mm VERSION: A
		DRAWN BY: X.L.Bin 2009.07.20 DRAWING NO: 9050-08-08-22-XXXX-1

	COMPONENTS	DESCRIPTION	Q'TY
1	FRC8050F-25	Centronic 50P Female Connector IDC Type Shell: Steel Nickel Plated Insulator: Blue P.B.T Contact: Brass G/F Gold Plating	2
2	Hood	Steel Nickel Plated	2
3	Cable	UL2990 28AWG 25Pairs ID: 6.60mm OD: 8.0mm Impedance: 90 Ω±10Ω Color: Beige L:xxxx cm	1
4	Jackscrew	UNC 4#40 steel,nickel plaetd. L:18mm	2
5	Jackscrew	UNC 4#40 steel,nickel plaetd. L:11mm	2