


FRC
50P(F)

1	Light Green 淺綠色
26	Light Green/Black 淺綠/黑
2	White/Red 白/紅
27	White/Blue 白/藍
3	Red/White 紅/白
28	Red/Blue 紅/藍
4	Green 綠色
29	Green/Black 綠/黑
5	Blue 藍色
30	Blue/White 藍/白
6	White 白色
31	White/Black 白/黑
7	Yellow/Red 黃/紅
32	Yellow/Blue 黃/藍
8	Red 紅色
33	Red/Black 紅/黑
9	Brown 棕色
34	Brown/White 棕/白
10	Green/White 綠/白
35	Light Green/Blue 淺綠/藍
11	Gray/Red 灰/紅
36	Gray/Blue 灰/藍
12	Orange 橙色
37	Orange/Black 橙/黑
13	Light Green/Yellow 淺綠/黃
38	Light Green/Green 淺綠/綠
14	Pink/Red 粉紅/紅
39	Pink/Blue 粉紅/藍
15	Light Blue/Red 淺藍/紅
40	Light Blue/Blue 淺藍/藍
16	Light Green/Red 淺綠/紅
41	Green/Blue 綠/藍
17	Gray 灰色
42	Gray/Black 灰/黑
18	White/Yellow 白/黃
43	White/Green 白/綠
19	Violet 紫色
44	Violet/White 紫/白
20	Yellow 黃色
45	Yellow/Black 黃/黑
21	Gray/Yellow 灰/黃
46	Gray/Green 灰/綠
22	Pink 粉紅色
47	Pink/Black 粉紅/黑
23	Pink/Yellow 粉紅/黃
48	Pink/White 粉紅/白
24	Light Blue/Yellow 淺藍/黃
49	Light Blue/Green 淺藍/綠
25	Light Blue 淺藍
50	Light Blue/Black 淺藍/黑

SHELL

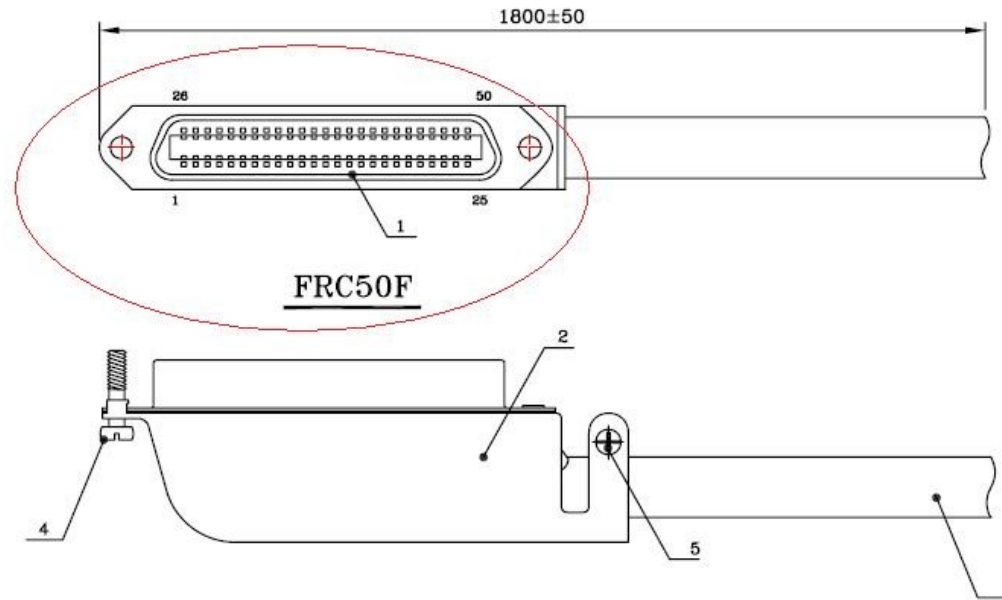

• **RoHS**

• 100% OPEN / SHORT / INSULATING TEST

• INSULATION TEST: 2MΩ

2		
1		
NO.	DATE	MODIFICATION
		APPROVED BY: _____ DATE: _____
		CHECKED BY: _____ DATE: _____
		SALES: _____ DATE: _____
		NAME: _____
		SCALE: X:1 UNIT: mm VERSION: A
		DRAWN BY: James 2009.07.16 DRAWING NO: 9050-T065-04418

	COMPONENTS	DESCRIPTION	Q'TY
1	FRC8050F-25	Centronic 50P Female Connector IDC Type Shell: Steel Nickel Plated Insulator: Blue P.B.T Contact: Brass G/F Gold Plating	1
2	Hood	Steel Nickel Plated	1
3	Cable	UL2990 28AWG 25Pairs ID: 0.60mm OD: 8.0mm Impedance: 90 Ω±10Ω Color: Beige L 1800mm	1
4	Jackscrew	UNC 4#40 steel,nickel plaetd. L:18mm	1
5	Jackscrew	UNC 4#40 steel,nickel plaetd. L:11mm	1

WT P/N: 9050-T065-04418
CUSTOMER P/N:
DESCRIPTION:
FRC8050 Cable L : 180 CM