



Rev	Modification Content	Date	Validate
△B	the Second Edition	2010-08-16	Aileen

**ROHS**

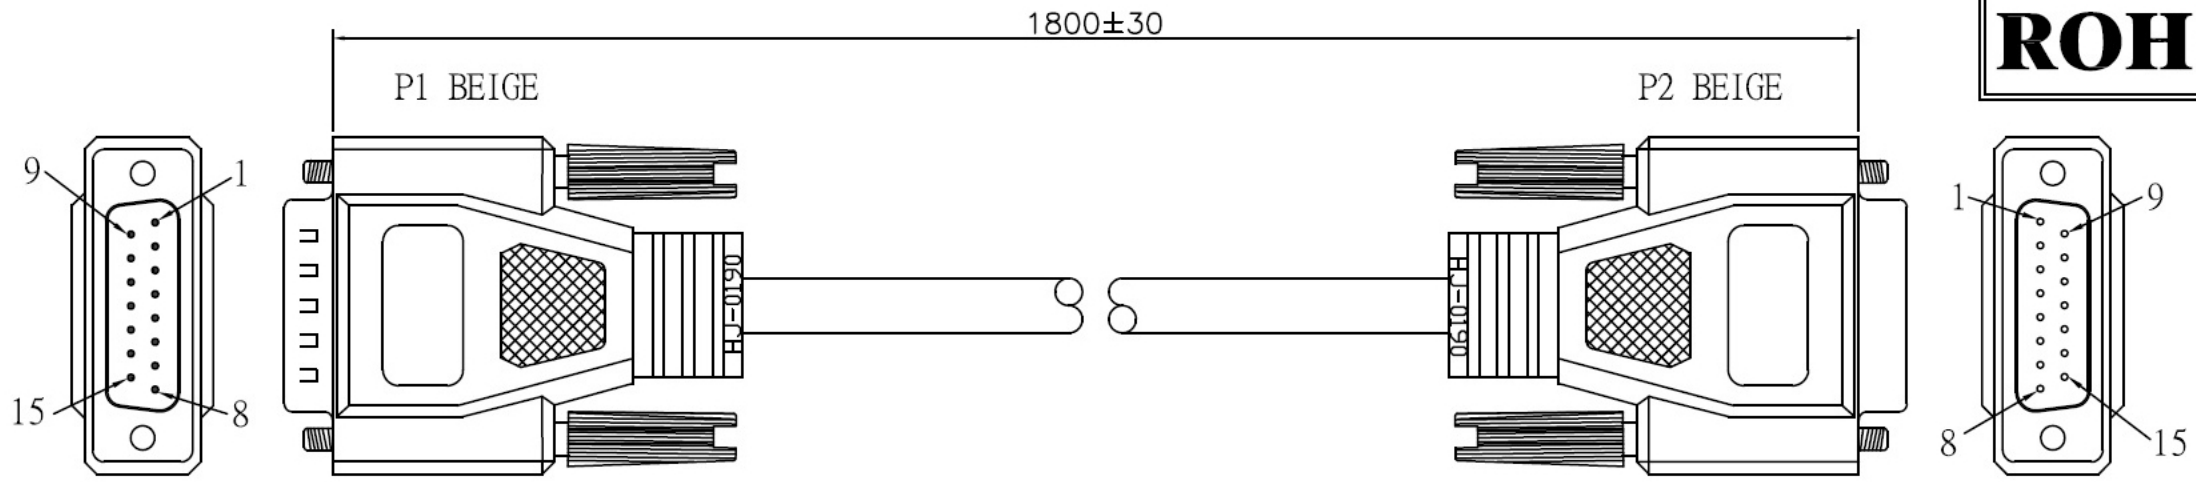

BUY ON  
**www.cablematic.com**

Packing:



1. 單條包裝.

Pin Assignment:

P1		P2
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	WHITE	8
9	GRAY	9
10	PURPLE	10
11	BLACK/GREEN	11
12	PINK	12
13	BLACK/YELLOW	13
14	BLACK/WHITE	14
15	BLACK/RED	15
S	GND	S

NOTE:  
1). 100% TEST OPEN, SHORT & MISWIRE.  
2). INSULATION RESISTANCE: 1Mohm (MIN).

5	Molding △B	P1,P2: 50P PVC BEIGE	28 g
4	Screw △B	AE*23.5 #4-47 MOLDING:BEIGE	4 pcs
3	Connector	HD15PF	1 pcs
2	Connector	HD15PM	1 pcs
1	Cable △B	NOUL 28AWG*15C+1+AL OD:6.0 JACKET:BEIGE L:1800MM	1 pcs
NO.	P/N	DESCRIPTION	QTY

P/N	DB15PM/DB15PF 1.8M			
Item	ARM1531540010180			
Drawn By	Cindy	Customer NO.	NO	N
Audited By			Unit : mm	
Date	2008-09-02	Rev. : 1.00	ME	