


Option for Six angle hole

Introduction

Is a ultra compact chassis with 15" depth ,max 3*5.25+4x3.5" HDD space for wide range application Support ATX PS2 powersupply for regular server


Features and Benefits

- Support (2+1) *5.25 space+4x3.5" HDD space
- High density chassis support ATX / Micro ATX Motherboard and PS 2 ATX Powersupply

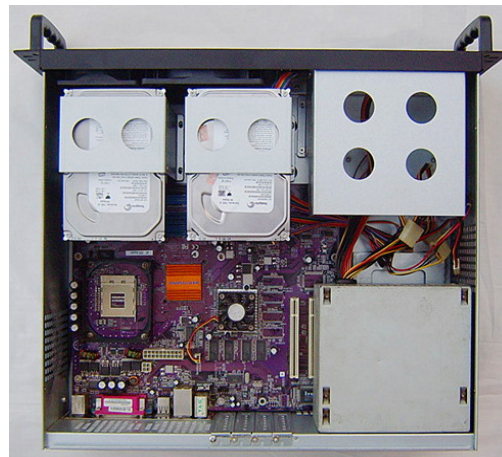

Specification

Dimension (W*H*D)	19"*5.25"*15.35"/ 482*133.3*390 (mm)
Material Construction	Heavy-duty & Rugged steel 1.0mm
M/B Size	12 x 9.6 (ATX, microATX, mini-ITX)
	1. When ATX MB installed, the available 5.25" driver bay will reduce to 2 bays, because the ATX MB and the bottom 5.25" conflict.
	2. When Micro ATX MB installed, the 5.25" driver bay will be 3 bays
Expansion	4 slots full height rear side ATX
	1*Power switch +1* Reset switch
Control & Indicator	1 x LED(power) +2 x LED(HDD)
	2*3.0 USB
Cooling Fans	2 x 8025 fan in take + 2x6025 at rear(option)
DriveBay	3*5.25 +4 x 3.5"(Internal)
Power Supply	PS-2 ATX powersupply
Sliding rail	20" ball bearing sliding rail (option)
Color	Black / Red / Bule / Green / Silver
Operation Temperature	Up to 50C (122°F)
Operation Humidity (Non-condensing)	Up to 90%
Packing Measurement CBF / CBM	2.5/ 0.07
Packing N.W / G.W	6.0KGS / 7.5KGS

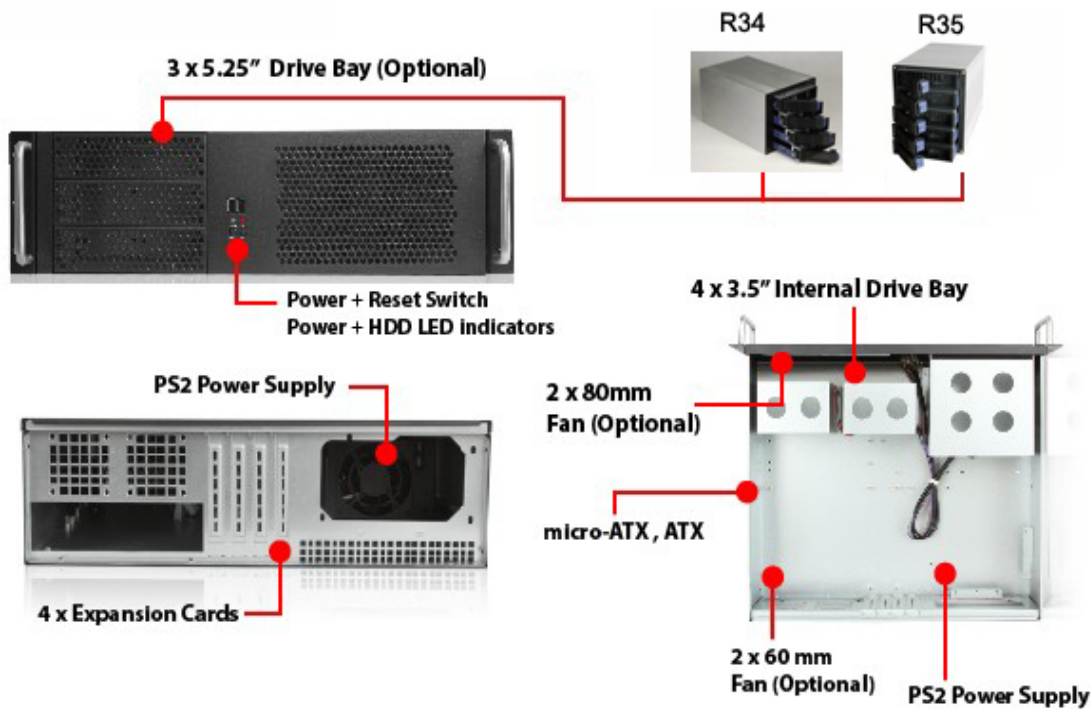

Option: Three-Sections Heavy-Duty Solid Ball-Bearing Sliding Rails

Features: Universal Design to match almost all chassis on market, Heavy-Duty Slide Ball Bearing
 Built-in stop-latch, lock chassis in extended position for easy access ,
 Simply pressing on the plastic levers on each side and slide your case back into the cabinet
 Warranty: 1 Year

