
FITING INSTRUCTION



LOW BACK DETACHABLE HEADREST SINGLE FRONT



REMOVE HEADREST AND INSTALL SINGLE FRONT COVER

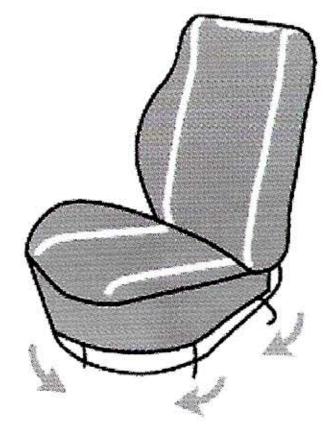


COVER SEAT PART
PULL TAB THROUGH
MIDDLE CREVICE
FIX BY ELASTIC LOOPS
AND HOOKS




COVER HEADREST AND INSERT BACK


REAR BACK COVER

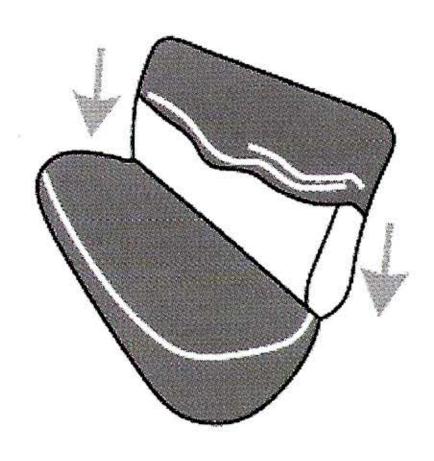


INSTALL REAR BACK COVER

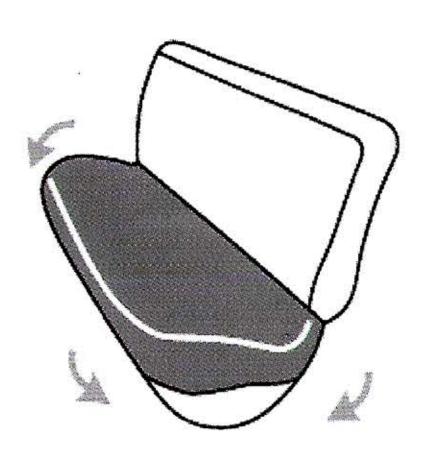

INSTALL REAR SEAT COVER

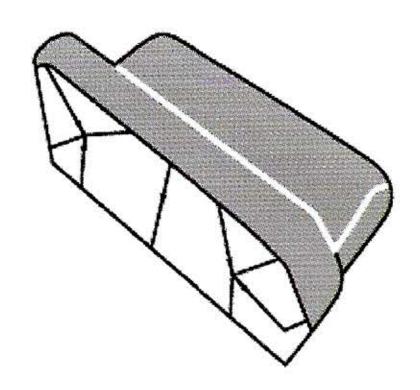

PULL SKIRT THROUGH MIDDLE CREVICE FIX BY ELASTIC LOOPS AND HOOKS

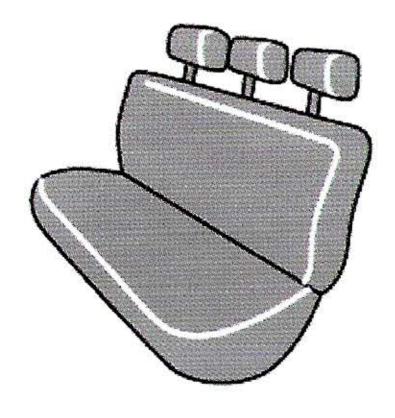

COVER THE HEADREST AND INSERT BACK BY CUTTING A CROSS AS YOU NEED