




P1:	M-Y222D
	M-222E
P2:	M-Y315A
	M-315A
P3:	M-426E

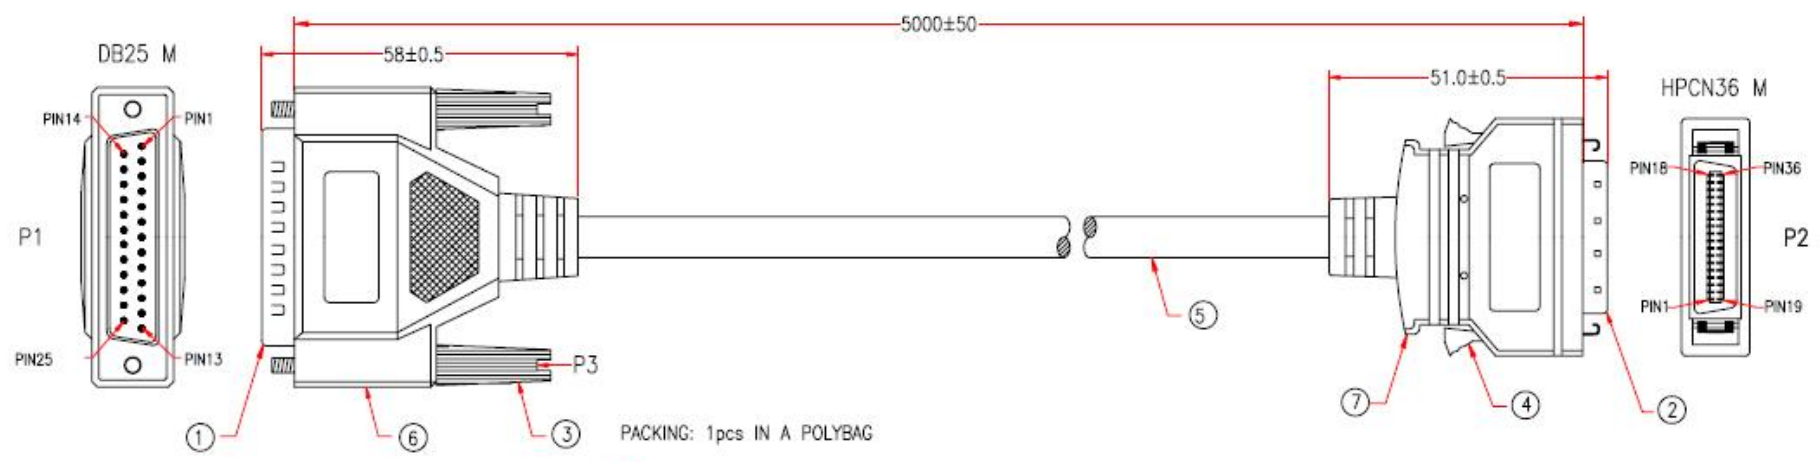

PACKING: 1pcs IN A POLYBAG



NOTE: All relevant materials are complied with RoHS directive .

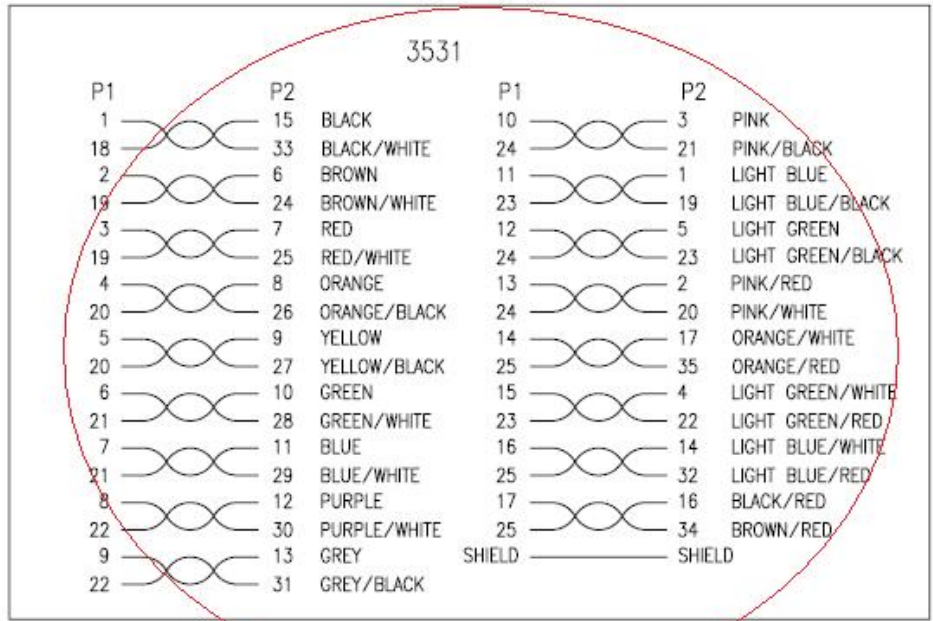

No.	DESCRIPTION	Q'TY	Supplier
7	PE HOOD COLOR TRANSPARENT		M304
	COPPER FOIL 33*110mm	1	M583
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
6	BLACK PVC TUBE Ø3.0*30mm	1	M304
	COPPER FOIL 33*110mm	1	M583
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
5	UL20276 IEEE 1284 CABLE, 18 TWISTED PAIRS 28AWG, ALUM-MYLAR FOIL AND COPPER BRAID SHIELDING WITH DRAIN WIRE, OD 7.5mm, JACKET BEIGE, DRAWING No. EAAB2818P-148	5020mm	M304
4	LATCH	2	M83
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	2	M95
2	DB25 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
1	HPCN36 MALE, GOLD FLASH ON CONTACTS, BLACK INSULATOR, ASSEMBLY TYPE (0.62)	1set	M83

APPROVED		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm			
CHECKED	HU				
DRAWING	JUDY				
DATE	27/JUL/10	ITEM NO.	3531	UNIT:mm	

CHECKED