


P:	M-Y417B
	M-417A
P3:	M-427B

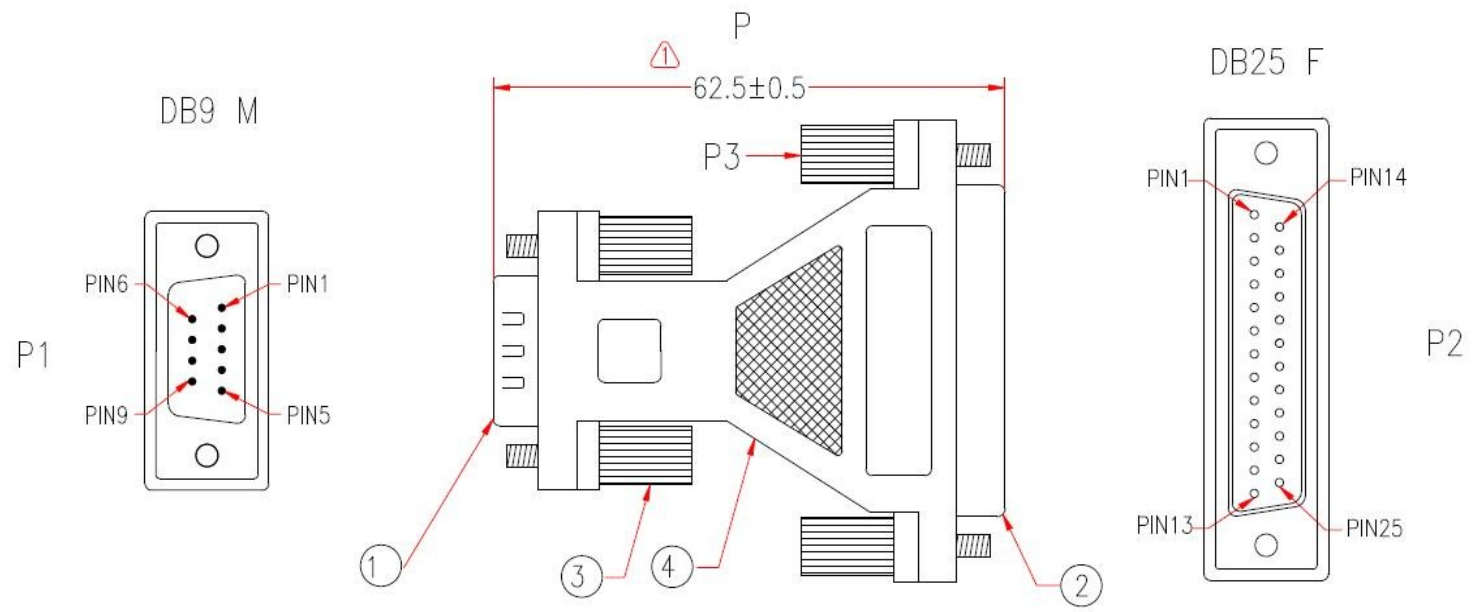

4026		
P1		P2
1	—————	8
2	—————	3
3	—————	2
4	—————	20
5	—————	7
6	—————	6
7	—————	4
8	—————	5
9	—————	22
SHIELD	—————	SHIELD

⚠ \*NOTE: All relevant materials are complied with RoHS directive .

4	UL1061 26AWG INSULATOR WIRE, ID 1.0mm, LENGTH 47mm*9PCS, 55mm*1PCS, DRAWING No. EN002601C-013	10	M304
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
3	MOLDED THUMBSCREW #4-40, LENGTH 21.5mm, BEIGE	4set	M95
2	DB25 FEMALE, GOLD FLASH ON CONTACTS, BIUE INSULATOR	1	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108
No.	DESCRIPTION	Q'TY	Supplier

APPROVED			Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	MEI		

DATE	03/AUG/11	ITEM NO.		UNIT:mm	
------	-----------	----------	--	---------	--