
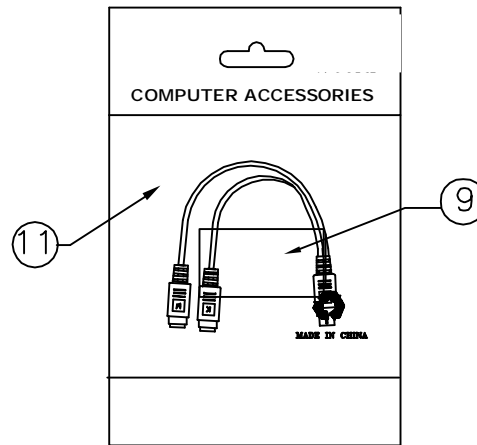
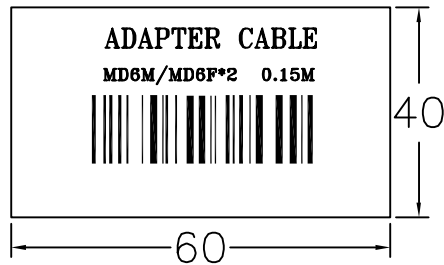


WEIGHT	CUSTOMER NO:	REMARK
24g-K1		

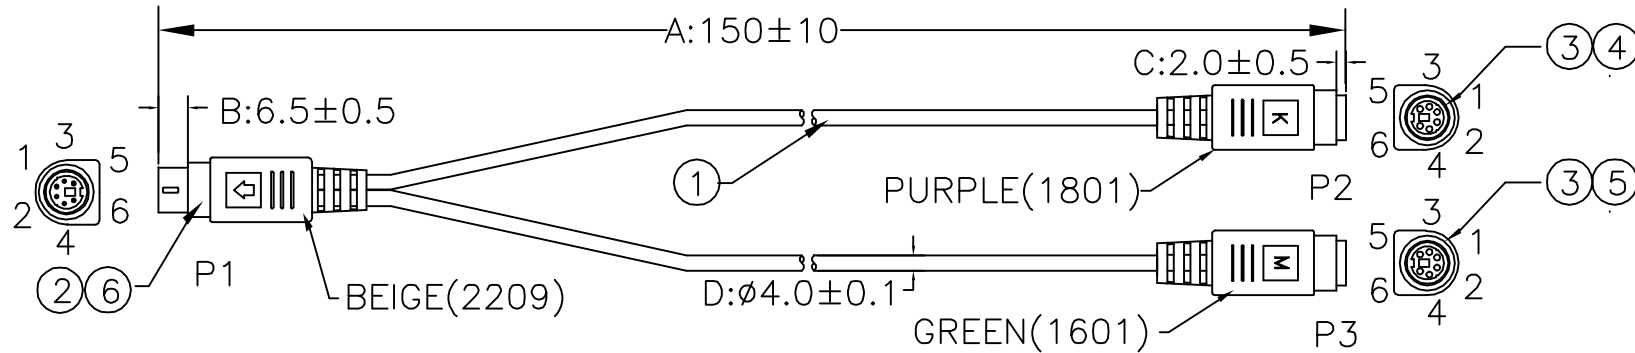

PINOUT DIAGRAM:

P3 M-DIN6F (MOUSE)	P1 M-DIN6M	P2 M-DIN6F (KEYBOARD)
1 BLACK	1 BLACK	1
3 BROWN	2 BROWN	3
4 RED	3 RED	4
5 ORANGE	4 RED	4
6 DRAIN	5 ORANGE	5
SHELL	6 DRAIN	SHELL

NOTES:

- 1) MINI DIN 6P DIE NO: OMO6D02(1 OUT OF 2 3SET)
- 2) PRIMARY DIM:A
- 3) RoHS COMPLIANT

7	INNER JACKET PE (RoHS)
6	OUTER JACKET PVC 45PA BEIGE(2209) (RoHS)
5	OUTER JACKET PVC 45PA GREEN(1601) (RoHS)
4	OUTER JACKET PVC 45P PURPLE(1801) (RoHS)
3	M-DIN6F SOLDER TYPE BLACK TERMINAL TIN PLATED W/SHRAPNEL (RoHS)
2	M-DIN6M SOLDER TYPE BLACK TERMINAL TIN PLATED W/SHRAPNEL (RoHS)
1	NON UL 28AWG 4C+A+D OD:4.0MM BEIGE(2209) 130MM (RoHS)

<b>B</b>	CHANGE RoHS	ChenBo	17/02/09										
REV.	ECR	DESCRIPTION	C.N. DATE										
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>		TITLE <b>KEYBOARD CABLE</b>											
<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>		CHKD.	CONF.										
<table border="1"> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> <tr> <td>0.00 TO 30.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>±0.13mm</td> </tr> <tr> <td>80.01 TO 150.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>150.01mm</td> <td>±0.20mm</td> </tr> </table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01mm	±0.20mm	DR.	APPD.
DIMENSIONS	TOLERANCE												
0.00 TO 30.00mm	±0.10mm												
30.01 TO 80.00mm	±0.13mm												
80.01 TO 150.00mm	±0.15mm												
150.01mm	±0.20mm												
MATERIAL <b>MATERIAL</b>		PART NO. <b>PA3BC</b>											
FINISH <b>FINISH</b>		SCALE /	SHEET <b>1/1</b> UNIT <b>MM</b> SIZE <b>A4</b> REV. <b>B</b>										