

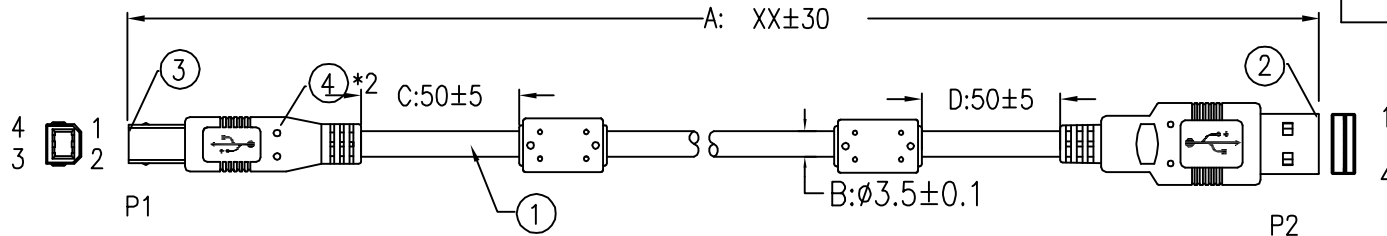


WEIGHT	CUSTOMER NO:	REMARK
		Cablematic

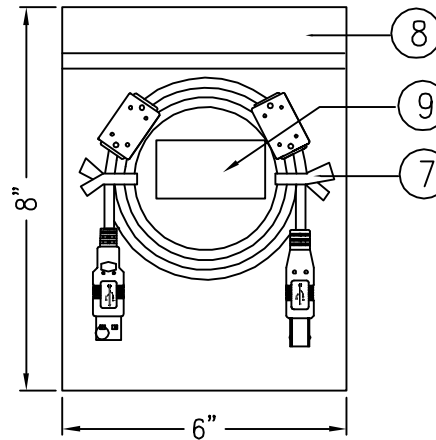


BUY ON
www.cablematic.com

Customer NO.	Length
CU52	1M
CU53	1,8M
CU54	3M

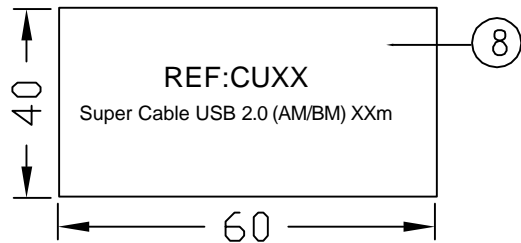

PINOUT:

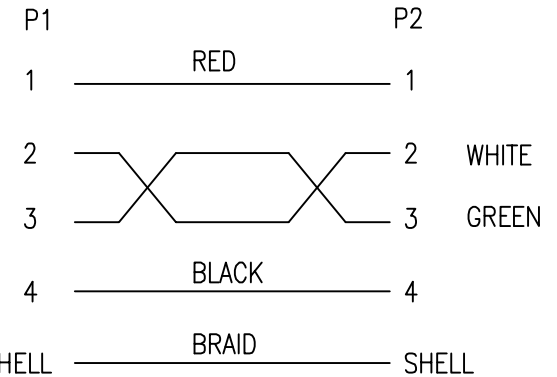

NOTES:

- 1) P1 DIE NO:OU04013(1 OUT OF 4, 1 SET)
- 2) P2 DIE NO: OU04022(1 OUT OF 2, 3 SET)
- 3) CORE WIRE COLOR: 1P: GREEN .WHITE.
2C: RED. BLACK.
- 4) PRIMARY DIMENSION: A

1	USB 2.0 28#1P+28#2C+A+B(32BAM)+D OD:3.5MM BLACK(1101) XXMM. (ROHS標準)
2	USB A/M WHITE SOLDER TYPE TERMINAL&SHELL PLATED GOLD (ROHS標準)
3	USB B/M WHITE SOLDER TYPE TERMINAL&SHELL PLATED GOLD (ROHS標準)
4	OUTER JACKET PVC 45Pa BLACK(1101)(ROHS標準)

A	FIRST EDITION	WJZ	22/11/2010										
REV. ECR	DESCRIPTION	C.N.	DATE										
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>													
<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>		TITLE											
<table border="1"> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> <tr> <td>0.00 TO 30.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>±0.13mm</td> </tr> <tr> <td>80.01 TO 150.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>150.01mm</td> <td>±0.20mm</td> </tr> </table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01mm	±0.20mm	USB2.0 CABLE	
DIMENSIONS	TOLERANCE												
0.00 TO 30.00mm	±0.10mm												
30.01 TO 80.00mm	±0.13mm												
80.01 TO 150.00mm	±0.15mm												
150.01mm	±0.20mm												
MATERIAL		CHKD.	CONF.										
FINISH		DR.	APPD.										
		PART NO.											
		SCALE	SHEET 1/1 UNIT MM SIZE A4 REV. A										