

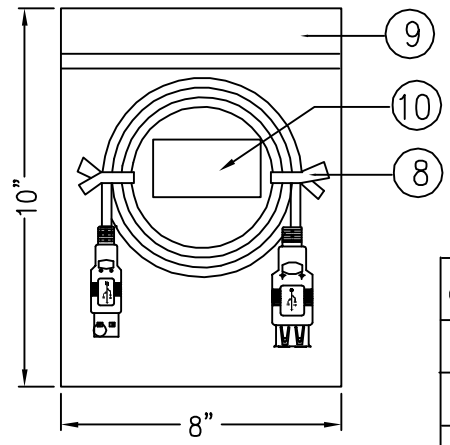
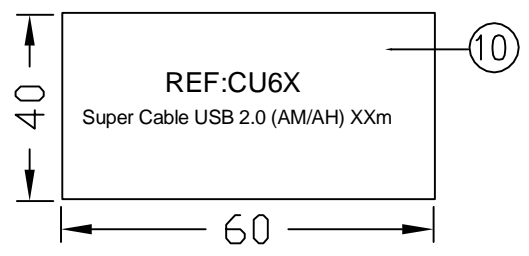


WEIGHT	CUSTOMER NO:	REMARK
		Cablematic

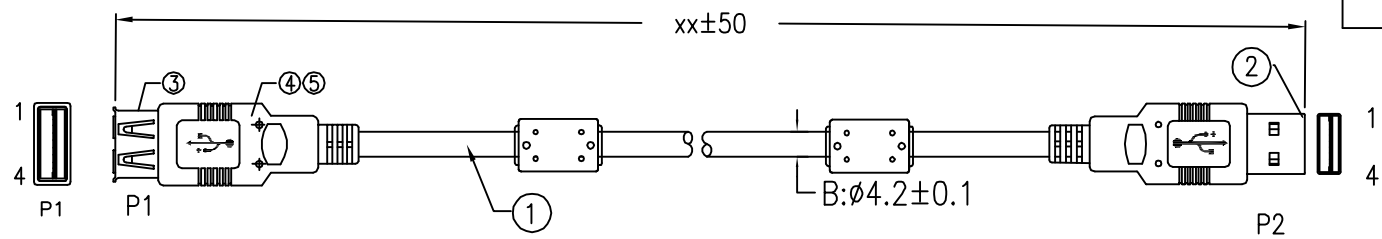

Customer NO.	Length
CU65	5M
CU66	7.5M
CU67	10M

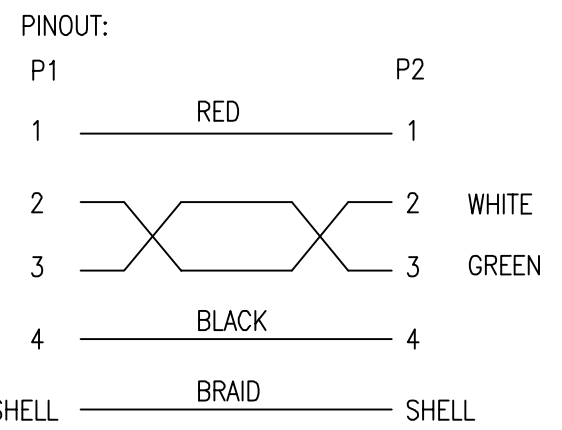

NOTES:

- 1) P1 DIE NO:OU04058(1 OUT OF 4, 1 SET)
- 2) P2 DIE NO: OU04022(1 OUT OF 2, 3 SET)
- 3) CORE WIRE COLOR: 1P: GREEN .WHITE.
2C: RED. BLACK.
- 4) PRIMARY DIMENSION: A

1	USB2.0 28#1P+24#2C+A+B(32BAM)+D OD4.2MM BLACK(1101) XXMM.(ROHS标准)
2	USB A/M WHITE 4P TERMINAL&SHELL PLATED GOLD (ROHS标准)
3	USB A/F WHITE SOLDER TERMINAL&SHELL:PLATED GOLD(ROHS)
4	OUTER JACKET PVC 45Pa BLACK(1101)(ROHS标准)

A	FIRST EDITION	2012/12/13														
REV. ECR	DESCRIPTION	C.N. DATE														
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>																
<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>																
<table border="1"> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> <tr> <td>0.00 TO 30.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>±0.13mm</td> </tr> <tr> <td>80.01 TO 150.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>150.01mm</td> <td>±0.20mm</td> </tr> </table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01mm	±0.20mm	<table border="1"> <tr> <td>CHKD.</td> <td>CONF.</td> </tr> <tr> <td>DR.</td> <td>APPD.</td> </tr> </table>	CHKD.	CONF.	DR.	APPD.
DIMENSIONS	TOLERANCE															
0.00 TO 30.00mm	±0.10mm															
30.01 TO 80.00mm	±0.13mm															
80.01 TO 150.00mm	±0.15mm															
150.01mm	±0.20mm															
CHKD.	CONF.															
DR.	APPD.															
MATERIAL		PART NO.														
FINISH		SCALE SHEET 1/1 UNIT MM SIZE A4 REV. A														

USB2.0 CABLE