

Molding NO.:

Molding P2內:219-1外:215-1

Molding P1,P3:152

Rev

Modification Content

Date

Validate

B


the Second Edition:
Color, Length and Packing

2007-08-14

Cindy

ROHS


1200±30

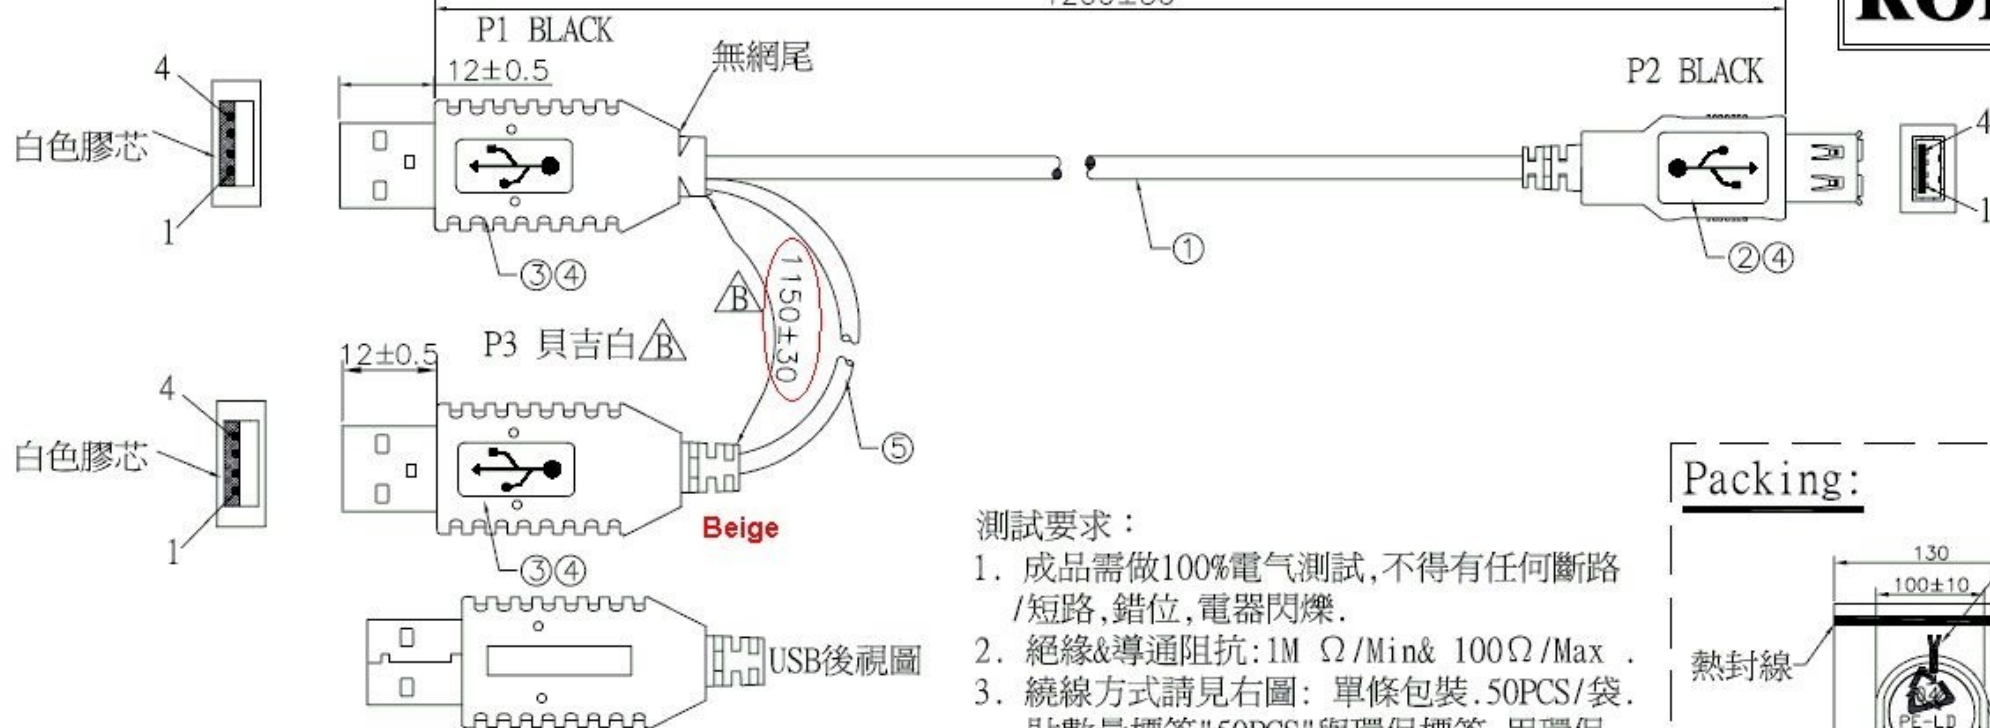

測試要求:

1. 成品需做100%電氣測試,不得有任何斷路/短路,錯位,電器閃爍.
2. 絕緣&導通阻抗:1M Ω/Min& 100Ω/Max .
3. 繞線方式請見右圖: 單條包裝,50PCS/袋. 貼數量標籤"50PCS"與環保標籤,用環保膠袋,膠袋上印有"04-LD"外箱兩側麥貼環保標籤.

Packing:

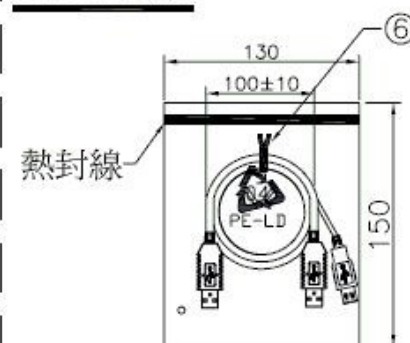

6	Tie	BLACK TIE	1 pcs
5	Cable	NOUL 22AWG(17/0.16TA*2C 過粉)*1C JACKET:PVC BLACK OD:3.5 INSULATION:RED/BLACK L:1200MM	1 pcs
4	Molding	P1,P2:50P BLACK PVC P3: 50P PVC 貝吉白-61	16 g
3	Connector	USB(A)公 (白膠芯) 鍍	2 pcs
2	Connector	USB(A)母 (白膠芯) 鍍	1 pcs
1	Cable	UL2725 (REV:2.0) 28AWG*1P+24AWG *2C+AL+D+B(48B)) BLACK OD:4.5 1P INSULATION:WHITE/GREEN 2C INSULATION:RED/BLACK L:1200MM	1 pcs
NO.	P/N	DESCRIPTION	QTY

Pin Assignment:

P1	P2	P3
1 — RED — 1	1 — RED — 1	1
2 — GREEN — 2	2 — GREEN — 2	2
3 — WHITE — 3	3 — WHITE — 3	3
4 — BLACK — 4	4 — BLACK — 4	4
S — GND — S	S — GND — S	

P/N	USB(A)公*2-USB(A)F L:1.2M			
Item	HJ-141-CU84			
Drawn By	Cindy	Customer NO.	NO	N
Audited By			Unit : mm	
Date	2007-08-11		Rev. : 1.00	ME