
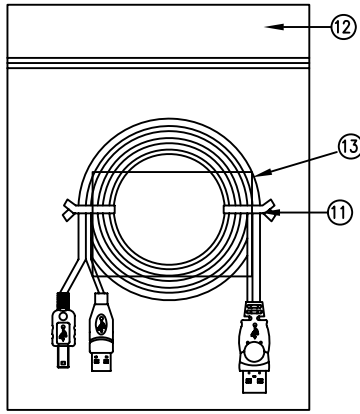
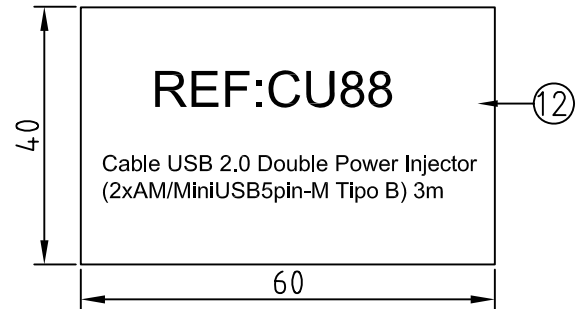



Weight	CUSTOMER NO.:	REMARK
210g-K1	CU88	CABLEMATIC

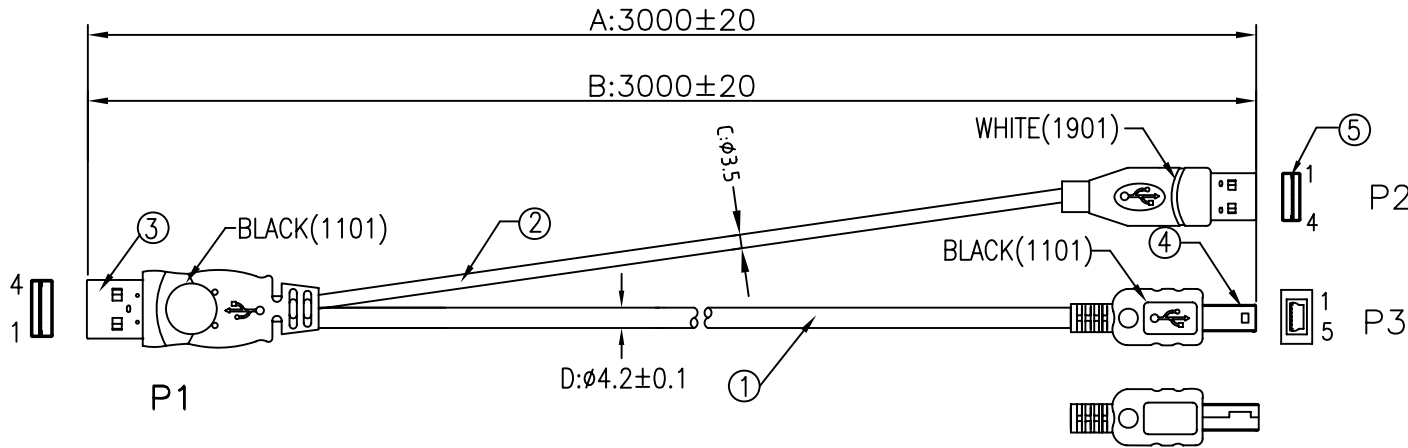

NOTE:

- 1) P1 DIE NO.:OU04077; P2 DIE NO.:OU04052
P3 DIE NO.:OU05002
- 2) CORE WIRE COLOR: 1P: GREEN .WHITE.
2C: RED. BLACK.
- 3) PRIMARY DIMENSION: A
- 4) 1PC/PE BAG+LABEL
- 5) RoHS COMPLIANT

PINOUT:

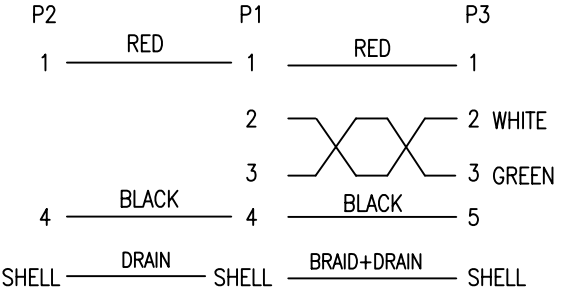

7	OUTER JACKET PVC 45Pa WHITE(1901) RoHS
6	OUTER JACKET PVC 45Pa BLACK(1101) RoHS
5	USB A/M 白 SOLDER TYPE SHORT BODY(ROHS)
4	USB MINI 5PIN BLACK SOLDER TYPE W/O PLASTIC HOOD (RoHS)
3	USB1.1 A/M WHITE 4P SOLDOR TYPE ROHS(RoHS)
2	UL2725 28#2C+A+D OD:3.5MM BLACK(1101) 6000MM (RoHS)
1	USB2.0 28#1P+24#2C+A+B(32B AM)+D(BA) OD:4.2mm BLACK(1101) 6000MM (RoHS)

A	FIRST EDITION	Q.ZhenX	2011/06/07
REV.	ECR	DESCRIPTION	C.N. DATE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.		TITLE	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		USB2.0 CABLE	
DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm	DR.	APPD.
80.01 TO 150.00mm	±0.15mm	Q.ZhenX	
150.01mm	±0.20mm	PART NO.	2112-1425
MATERIAL	MATERIAL	SCALE	SHEET 1/1 UNIT MM SIZE A4 REV. A
FINISH	FINISH		