


PIN ASSIGNMENT

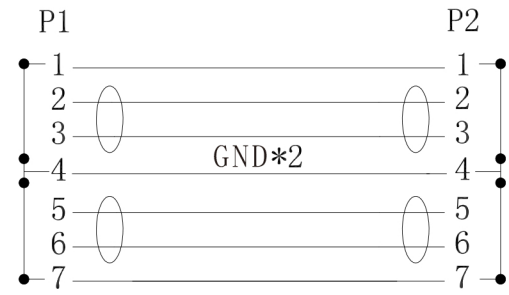

- Electrical Testing:
- 100% test: Open/Short circuit, Dislocation
 - Rdson Max: 2 OHM (Max)
 - Mega Ohms: 10M OHM (Min)
 - Pot tested: 300V DC/10MS

Conform to the requirements of the ROHS

	TOLERANCE	
	INCHES	M/M
. X	. 015	. 30
. XX	. 010	. 10
. XXX	. 005	. 05



Model name :			
SATA 7PF TO SATA 7PM			
Scale	NONE	Model	REV. A
Unit	MM	Drawing no	
Date	2016.01.20	Customer P/N:	1/1

NO.	DESCRIPTION	QTY	UNIT
4	45P PVC Black	0.01	KG
3	SATA 7P/M	1	PCS
2	SATA 7P/F	1	PCS
1	SATA UL2725 (26AWG*2C+A/M)*2+28AWG*4D OD:2.2*7.8±0.2MM Red	0.32	M

Drawn by	YDF
Check by	
Appd by	