



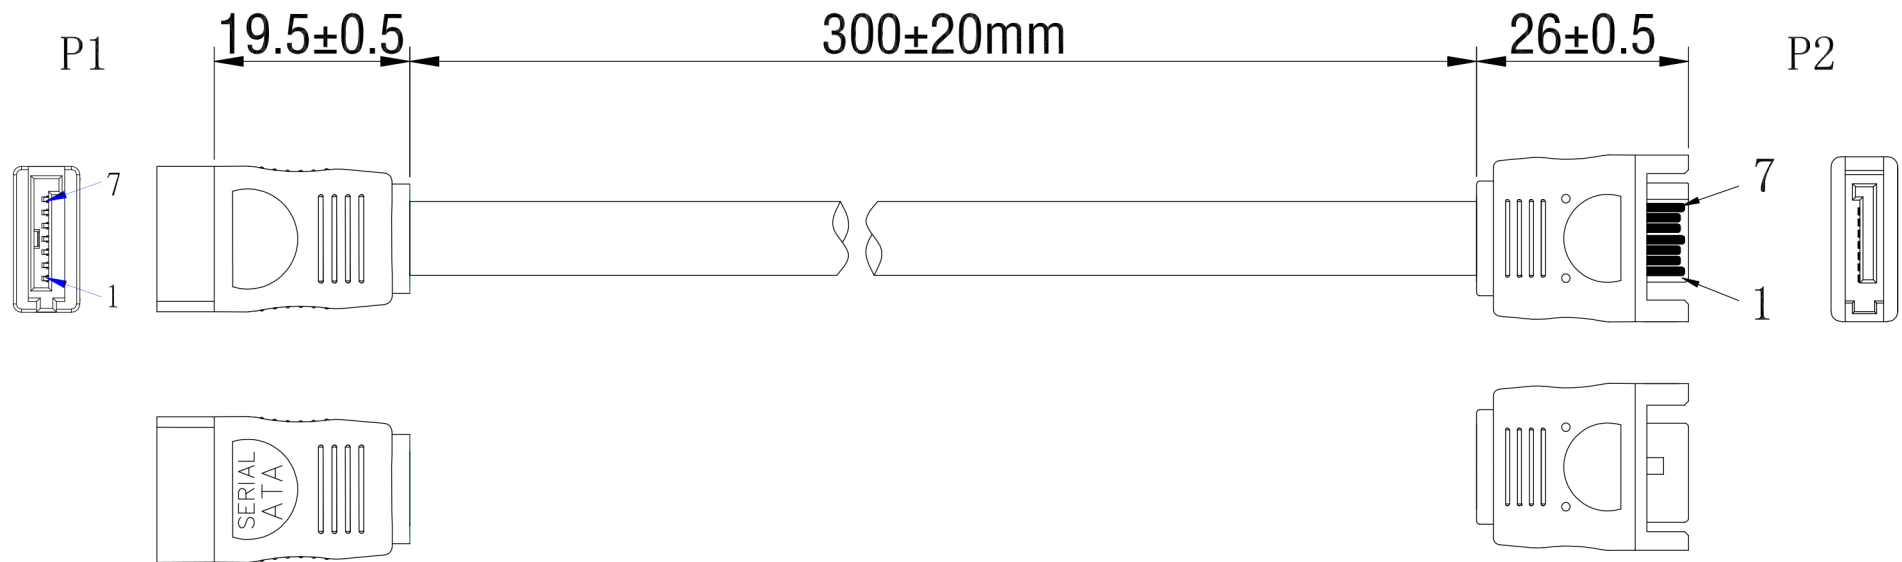

#### PIN ASSIGNMENT

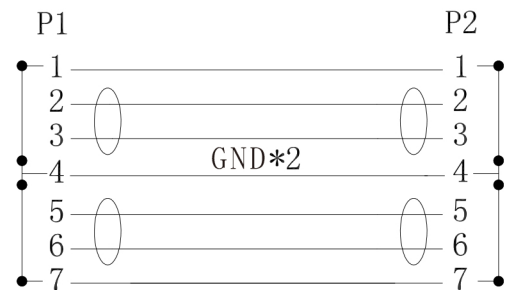

#### Electrical Testing:

1. 100% test: Open/Short circuit, Dislocation
2. Rdson Max: 2 OHM (Max)
3. Mega Ohms: 10M OHM (Min)
4. Pot tested: 300V DC/10MS

Conform to the requirements of the ROHS

|                                                                                       |  |  |                              |  |      |                                                                                  |                                          |            |  |               |  |           |  |
|---------------------------------------------------------------------------------------|--|--|------------------------------|--|------|----------------------------------------------------------------------------------|------------------------------------------|------------|--|---------------|--|-----------|--|
|  |  |  | TOLERANCE<br>INCHES      M/M |  |      | <div>BUY ON<br/><a href="http://www.cablematic.com">www.cablematic.com</a></div> |                                          |            |  |               |  |           |  |
| . X                                                                                   |  |  | . 015                        |  | . 30 |                                                                                  | Model name :<br><br>SATA 7PF TO SATA 7PM |            |  |               |  |           |  |
| . XX                                                                                  |  |  | . 010                        |  | . 10 |                                                                                  |                                          |            |  |               |  |           |  |
| . XXX                                                                                 |  |  | . 005                        |  | . 05 |                                                                                  |                                          |            |  |               |  |           |  |
| Drawm by                                                                              |  |  | YDF                          |  |      | Scale                                                                            |                                          | NONE       |  | Model         |  | REV.<br>A |  |
| Check by                                                                              |  |  |                              |  |      | Unit                                                                             |                                          | MM         |  | Drawing no    |  |           |  |
| Appd by                                                                               |  |  |                              |  |      | Date                                                                             |                                          | 2016.01.20 |  | Customer P/N: |  | 1 / 1     |  |

BUY ON  
[www.cablematic.com](http://www.cablematic.com)

| NO. | DESCRIPTION                                                | QTY  | UNIT |
|-----|------------------------------------------------------------|------|------|
| 4   | 45P PVC Black                                              | 0.01 | KG   |
| 3   | SATA 7P/M                                                  | 1    | PCS  |
| 2   | SATA 7P/F                                                  | 1    | PCS  |
| 1   | SATA UL2725 (26AWG*2C+A/M)*2+28AWG*4D OD:2.2*7.8±0.2MM Red | 0.32 | M    |