


Rev	Modification Content	Date	Validate
A	the First Edition	2007-04-18	Cindy

ROHS

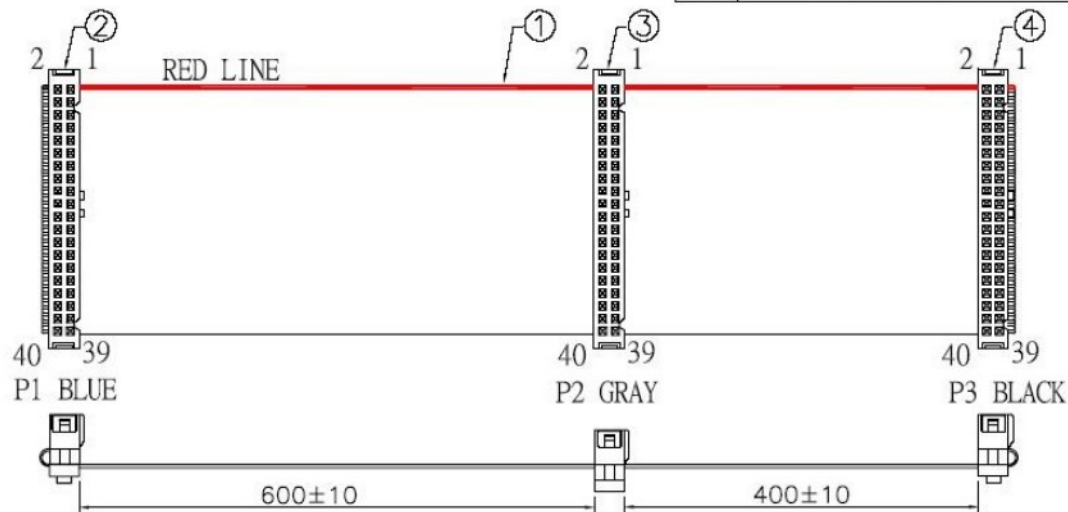

ELECTRICAL CHARACTER:

1. 100% OPEN/SHORT.
2. CONTACT RESISTANCE: 2 OHMS.
3. HI-POT: 300V 10MS.
4. INSULATION RESISTANCE: 10M OHMS.

PACKING:

1. 單條包裝.
2. 25條小包裝, 貼料號, 數量及環保標籤.

Pin Assignment:

P1 BLUE	P2 GRAY	P3 BLACK
1	1	1
3	3	3
4	4	4
5	5	5
6	6	6
.	.	.
.	.	.
18	18	18
20	20	20
21	21	21
23	23	23
25	25	25
27	27	27
28		28
29	29	29
31	31	31
32	32	32
33	33	33
	34	34
35	35	35
36	36	36
37	37	37
38	38	38
39	39	39

P1 BLUE	P2 GRAY	P3 BLACK
GROUND PIN:		
2	2	2
19	19	19
22	22	22
24	24	24
26	26	26
30	30	30
34	40	40
40		

4	Connector	ATA 40P 有耳 無塞 黑色 三件	1 pcs
3	Connector	ATA 40P 有耳 無塞 灰色 二件	1 pcs
2	Connector	ATA 40P 有耳 無塞 藍色 三件	1 pcs
1	Cable	UL20647 30AWG 80C PH:0.635MM TPO YELLOW PVC FLAT CABLE	1 pcs
NO.	P/N	DESCRIPTION	QTY

P/N				ATA100 3H2SR L:1M			
Item				HJ-141-DM14			
Drawn By		Cindy		Customer NO.		NO	
Audited By				Unit : mm		⊕	
Date		2007-04-18		Rev.: 1.00		ME	