


Rev	Modification Content	Date	Validate
A	the First Edition	2007-07-04	Cindy

ROHS

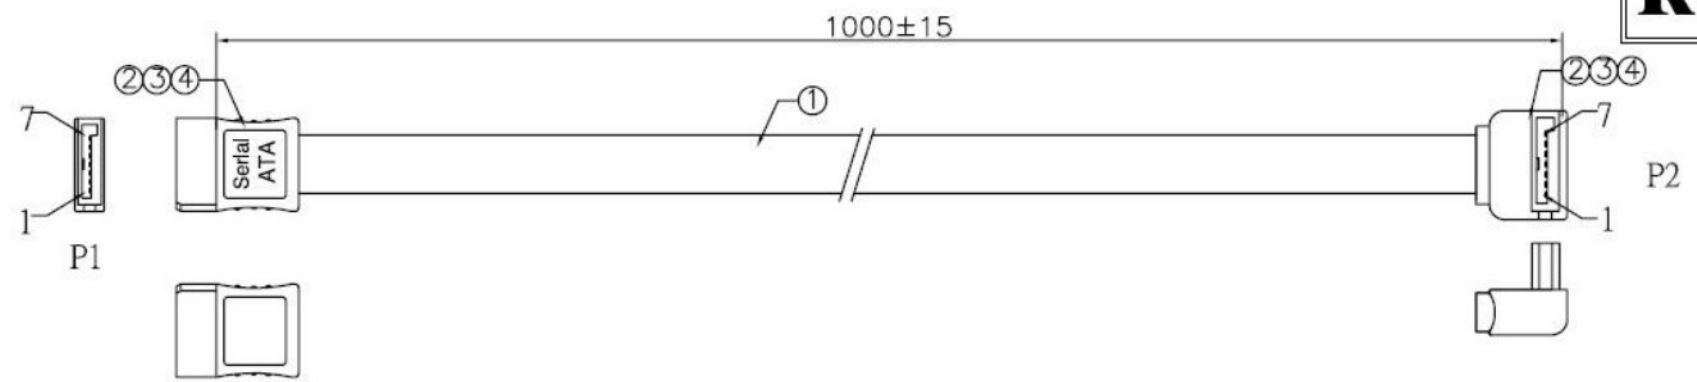

測試要求：

1. 成品需做100%電氣測試,不得有任何斷路/短路,錯位,電器閃爍.
2. 絕緣&導通阻抗:10M Ω/Min& 3 Ω/Max .
3. 測試電壓: DC 300V.
- △ 4. 兩端成型OK後,網尾處的外被不可有脫落現象.

包裝方式:


1. 單PCS繞圈,中間紮紮帶再裝PE袋熱封口.

側唛唛頭:

ITEM: HJ-141-DN03
 QTY: PCS
 NW: KGS
 GW: KGS
 SIZE: 46*30*23CM

8	Carton	46*30*23cm 印紅色字 K=K	pcs
7	PE Bag	(13"+19")*26"*0.05mm	pcs
6	Tie	WHITE PVC TIE, L=80mm	1 pcs
5	PE Bag	140*170*0.05mm	1 pcs
4	Molding	PE 料	4 g
3	Molding	45P PVC BLACK	12 g
2	Connector	SATA 7P FEMALE 鉚壓式 PIN GOLD FLASH	2 pcs
1	Cable	UL2725 SERIAL ATA CABLE 26AWG (1/0.4TC)*2P+AL/MY+28AWG(1/0.32TC)*4C, OD=2.2*7.8±0.1mm JACKET:RED 印黑字	1000mm
NO.	P/N	DESCRIPTION	QTY

Pin Assignment:

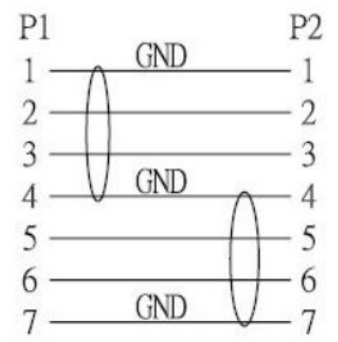

P/N	SATA 7P/SATA 7P			
Item	HJ-141-DN03			
Drawn By	Cindy	Customer NO.	NO	N
Audited By			Unit : mm ⊕	
Date	2007-07-04		Rev. : 1.00	ME