


WIRE CONNECTION:

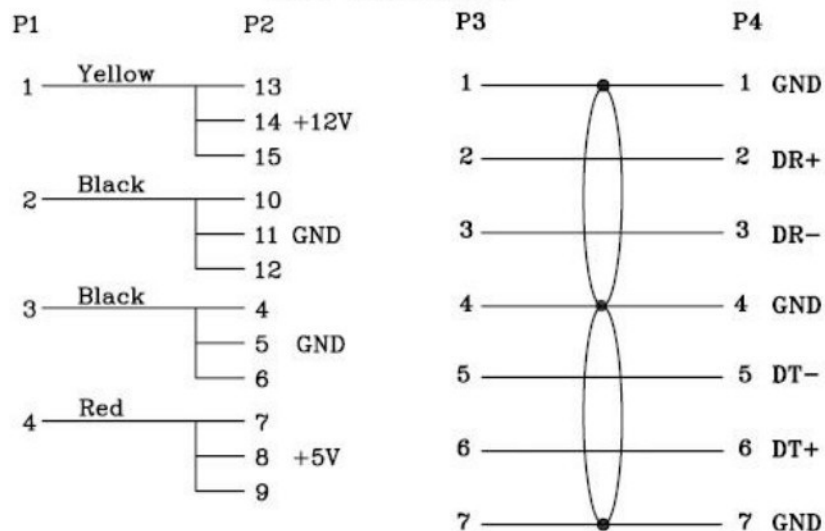

L(length)	L(length)
50cm±1.5 (20")	9028-1001-1610410
61cm±2.0 (24")	9028-1001-1610510
91cm±2.5 (36")	9028-1001-1610610
100cm±2.5 (39")	9028-1001-1610710
120cm±3.0 (48")	9028-1001-1610810
150cm±3.0 (59")	9028-1001-1610910

- (RoHS Compliant)
- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

4	2003.06.22	長度尺寸增加
3	2003.06.17	長度公差修改
2	2003.06.11	外觀修改加厚1.6mm
1	2003.04.04	外觀修改
NO.	DATE	MODIFICATION

COMPONENTS	DESCRIPTION	Q'TY
1	SA15F Insulator :SPS UL94V-0 ,Black , Contact :Phosphor Bronze	1
2	Power Plug 4P Male	1
3	Wire UL1007 18AWG (Color: BLACK X2 ,YELLOW X1 , RED X1) L : 140mm	4
4	HOOD PVC Molded Color: Black	1
5	CABLE (DER AN) SERIAL ATA CABLE, UL2725, (26AWG*2C+HMAM+2D)*2PCS. FLAT CABLE, Red COLOR, 2.2*7.6, Insulator Material: FM-PE	1
6	SA07F Insulator:SPS UL94V-0,Black,Contact:Phosphor Bronze GOLD PLATED 15u"	2
7	HOOD PVC Molded Color: Black	1

WT P/N: 9028-1001-161XX10	APPROVED BY: <i>Peter</i> DATE: 22.AUG.2003
CUSTOMER P/N:	CHECKED BY: <i>Chen</i> DATE: 22.AUG.2003
DESCRIPTION: Serial ATA Cable	SALES: 陳政豐 DATE: 22.AUG.2003
	NAME:
	SCALE: X:1 UNIT: mm VERSION: E
	DRAWN BY: 高麗麗 2003.06.17 DRAWING NO: 9028-1001-161XX10