


ELECTRONIC TEST:

1. OPEN/SHORT/INTERMITTE: 100%.
2. INSULATION RESISTANCE: 5MΩ.
3. CONTACT RESISTANCE: 10Ω.
4. HI-POT: 300V DTAGE.

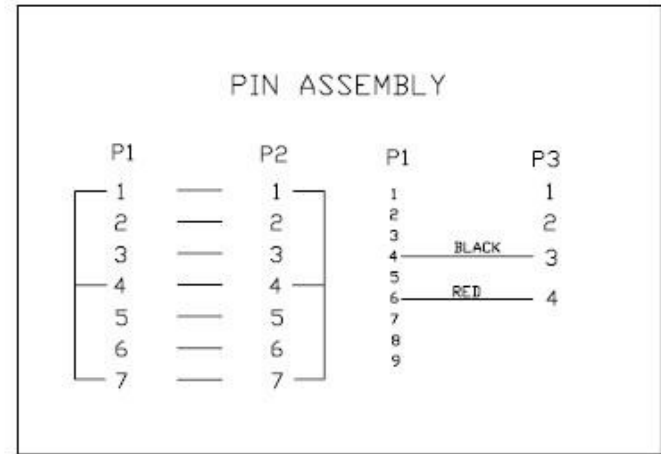

6	BIG 4P HOUSING WHITE IN COLOR(YV-3100-H04)	PCS	1
5	WIRE: UL1007 22AWG	PCS	1
4	PVC MOLD COLOR: BLACK		
3	CONNECTOR SERIAL SATA 7PIN CABLE SIDE	PCS	1
2	SERIAL SATA 16PIN PCB SIDE	PCS	1
1	SERIAL SATA CABLE UL2725 26AWG COLOR:RED	PCS	1
NO.	DESCRIPTION	UNCT	Q'TY

UNLESS OTHERWISE SPECIFIED TOLERANCE			
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE:	1:1	UNIT:	mm
DRAWN	TAN	DATE	08/10/06
CHECKED		競捷 DN69	
APPROVED		PRODUCT NO.	
REV.		FILE NAME:	

A	Micro SATA 7+7+2PIN PCB SIDE/SATA7P CABLE SIDE+BIG 4M	08/10/06	
REV.	DESCRIPTION	DATE	