
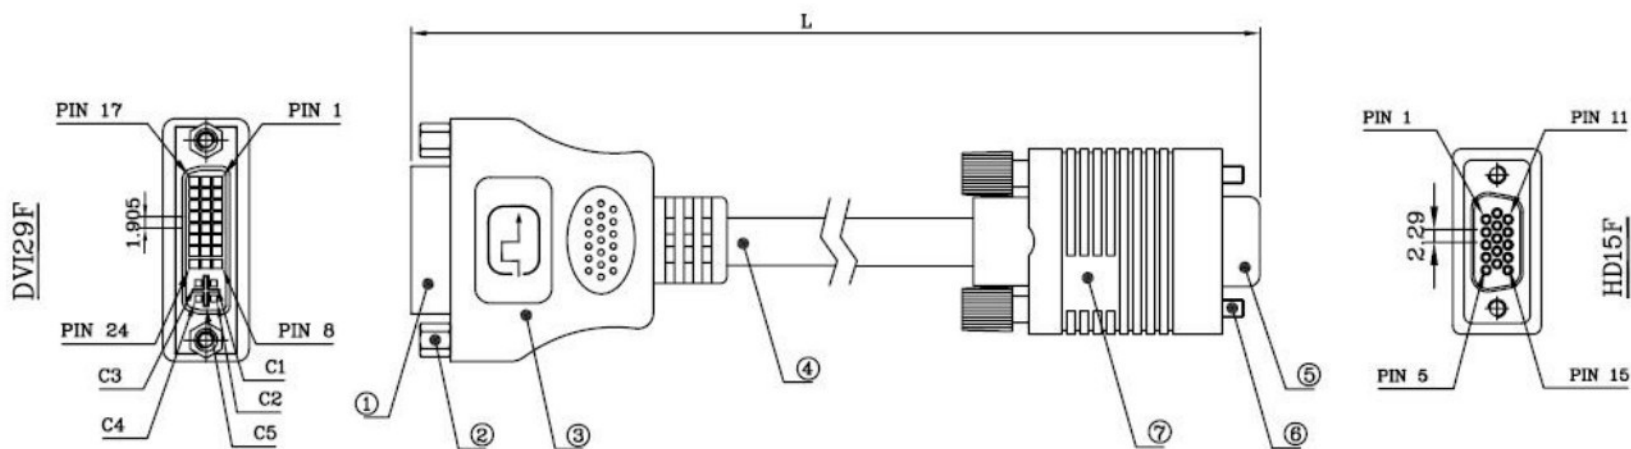


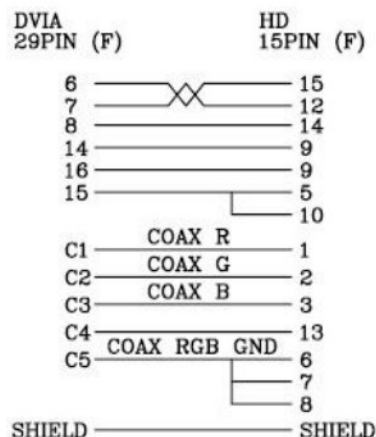

WT	P/N	CUSTOMER NO
9011-06110-0180-103	DV51	
9011-06110-0300-103	DV52	
9011-06110-0500-103	DV53	

9011-06110-XXXX-103

Length Unit: CM

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

DV51 ~ DV53

COMPONENTS	DESCRIPTION	Q'TY
1 DVI29F	DVI-Integrated 29P Female Connector Insulator: High Temperature Plastic UL-94V-0 Contact: Phosphor Bronze Metal Board Lock: Zinc Alloy With Tin Plating 150μ" Over Shell: Zinc Alloy With Nickel Plated 150μ" Over Contact Plating: Gold on Connector Area And Tin/LEAD On Solder Tail All With Nickel Underplating	1
2 Screw Lock	Hex UNC #4-40 Nickel Plated	2
3 Hood	Outer Hood P.V.C Molded Color: Black Inner Molded With Copper Foil Shielded	1
4 Cable D0643B (DER AN)	UL20276 80°C 30V VW-1 DVI Analog OD:7.0mm Color: Black	1
5 HD15F	D-SUB High Density 2.29mm 15P Female Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Brass G/F Gold Plated	1
6 Jackscrew	UNC #4-40 Nickel Plated Molded Type: ABS Color: Black	2
7 Hood	Outer Hood P.V.C Molded Color: Black Inner Molded With Copper Foil Shielded	1

2		
1		
NO.	DATE	MODIFICATION
		APPROVED BY: DATE: 2003.12.21
		CHECKED BY: DATE: 2003.12.21
		DESIGN BY: DATE: 2003.12.21
		PART NO:
		SCALE: X:1 UNIT: mm VERSION: A
		DRAWN BY: 吳桂海 2003.12.19 DRAWING NO: 9011-06110-XXXX-103

WT P/N: 9011-06110-XXXX-103

DESCRIPTION: DVI-Analog To VGA Cable