
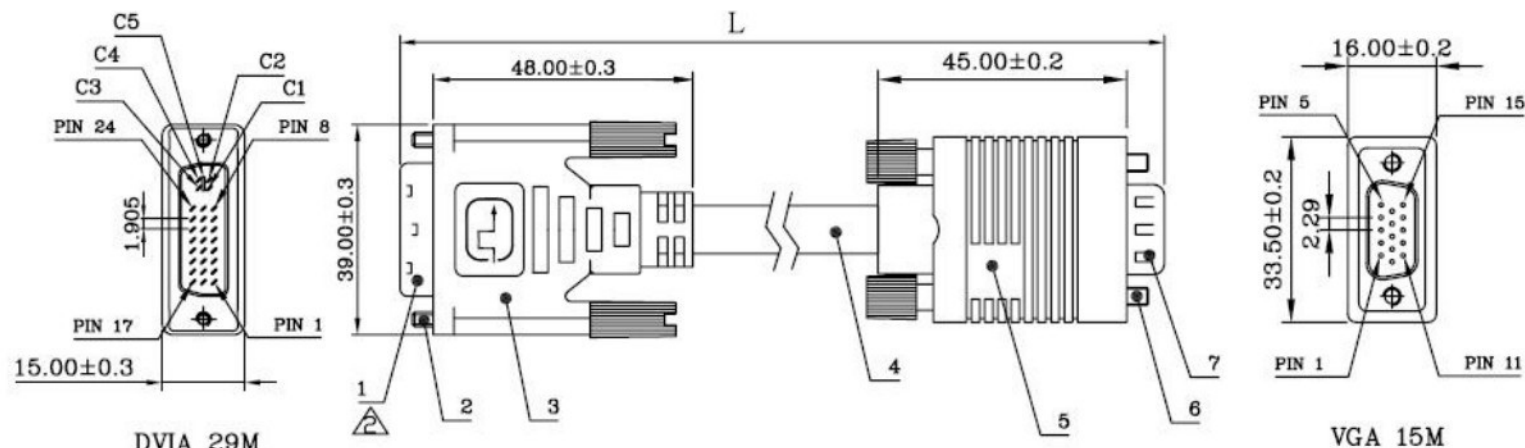


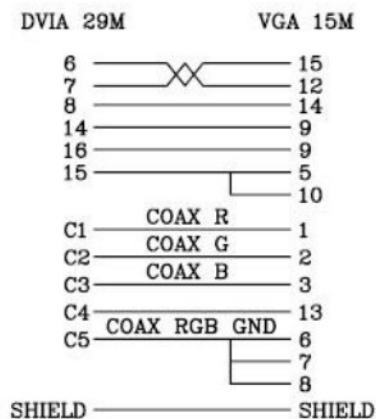

WT	P/N	CUSTOMER NO
9011-09100-0180-103	DV54	
9011-09100-0300-103	DV55	
9011-09100-0500-103	DV56	

9011-09100-XXXX-103
Length Unit: CM

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

COMPONENTS	DESCRIPTION	Q'TY	DV54 ~ 56		
1 DVIA29M	DVI-Analog 24P+4P+Key Male Connector Insulator: PBT UL-94V-0 Color: Black Shell: Steel With Nickel Plated Contact :brass Gold Plated	1	△	2005. 09. 13	DVI M前殼電鍍由鍍錫改為鍍鎳
2 Jackscrew	UNC #4-40 Nickel Plated Hood: ABS Color: Black	2	1	2004. 04. 21	料號變更
3 Hood	Assembly Hood: Outter P.V.C Molded Color: Black Inner Shell Material: SPCC	1	項次	日 期	修 改 內 容
4 Cable D0643B (DER AN)	UL20276 80°C 30V OD: 7.0mm Color: Black	1	APPROVED BY: 潘德賢 DATE: 2005. 09. 15		
5 Hood	Outter Hood P.V.C Molded Color: Black Inner Molded With Copper Foil 360° Soler Shielded	1	CHECKED BY: 陳政豐 DATE: 2005. 09. 15		
6 Jackscrew	UNC #4-40 Nickel Plated Molded Type: ABS Color: Black	2	SALES BY: 董奮勇 DATE: 2005. 09. 15		
7 HD15M	D-SUB High Density 15P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Brass G/F Gold Plated	1	NAME:		
			SCALE: X:1 UNIT: mm 版本 C		
			DRAWN BY: 梁春萍 2005. 09. 13 DRAWING NO: 9011-09100-XXXX-103		