
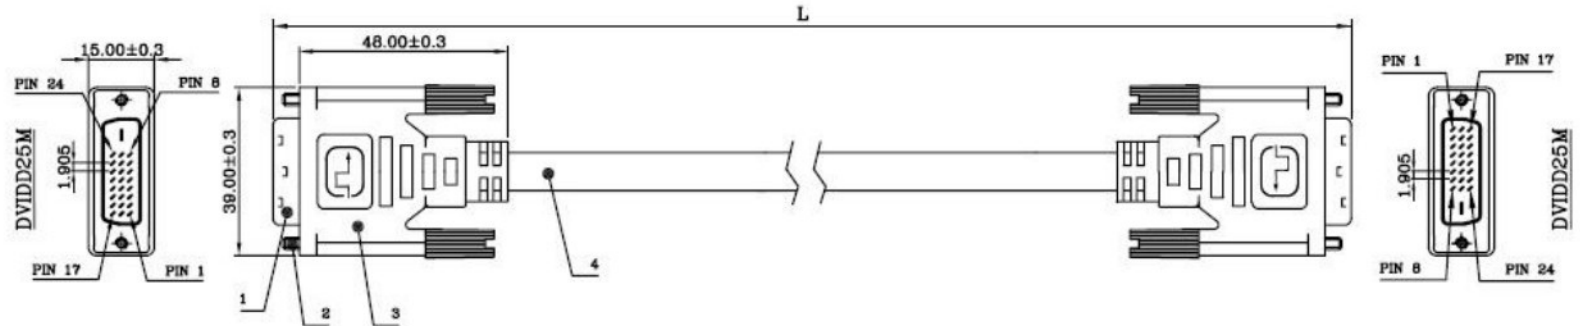


# WIRE DIAGRAM

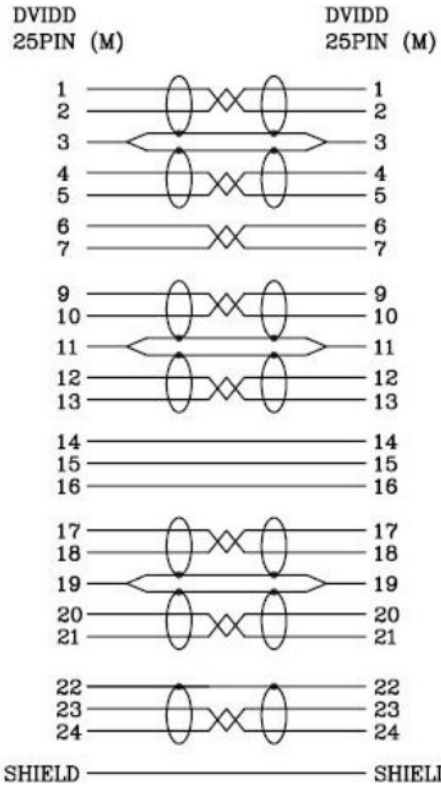

Unit:CM

Length Unit:CM	Tolerance
< 50	± 2
50-100	± 3
101-150	± 4
151-300	± 5
301-500	± 6
> 500	± 10

9011-02020-XXXX-101

Length Unit: CM

DV70 ~ DV76

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

COMPONENTS	DESCRIPTION	Q'TY	NO.	DATE	MODIFICATION
1	DVIDD25M DVI-Digital 25P Male Connector Insulator: High Temperature Plastic UL-94V-0 Contact: Brass Shell: Steel With Tin Plated 150μ" Over Contact Plating: Gold on Connector Area And Tin/LEAD On Solder Cup All With Nickel Underplating	2			APPROVED BY: <i>PAN</i> DATE: 2004.01.19 CHECKED BY: DATE: DESIGN BY: <i>JJM</i> DATE: 2004.01.19
2	Jackscrew UNC #4-40 Nickel Plated Hood: ABS Color: Black	4			PART NO: SCALE: X:1 UNIT: mm VERSION: A DRAWN BY: 吴桂海 2004.01.19 DRAWING NO: 9011-02020-XXXX-101
3	Hood Assembly Hood: Outter P.V.C Molded Color: Black Inner Shell Material: SPCC	2			
4	Cable D7387 (DER AN) UL20276 80°C 30V OD:8.6mm Color: Black	1			
		2			