


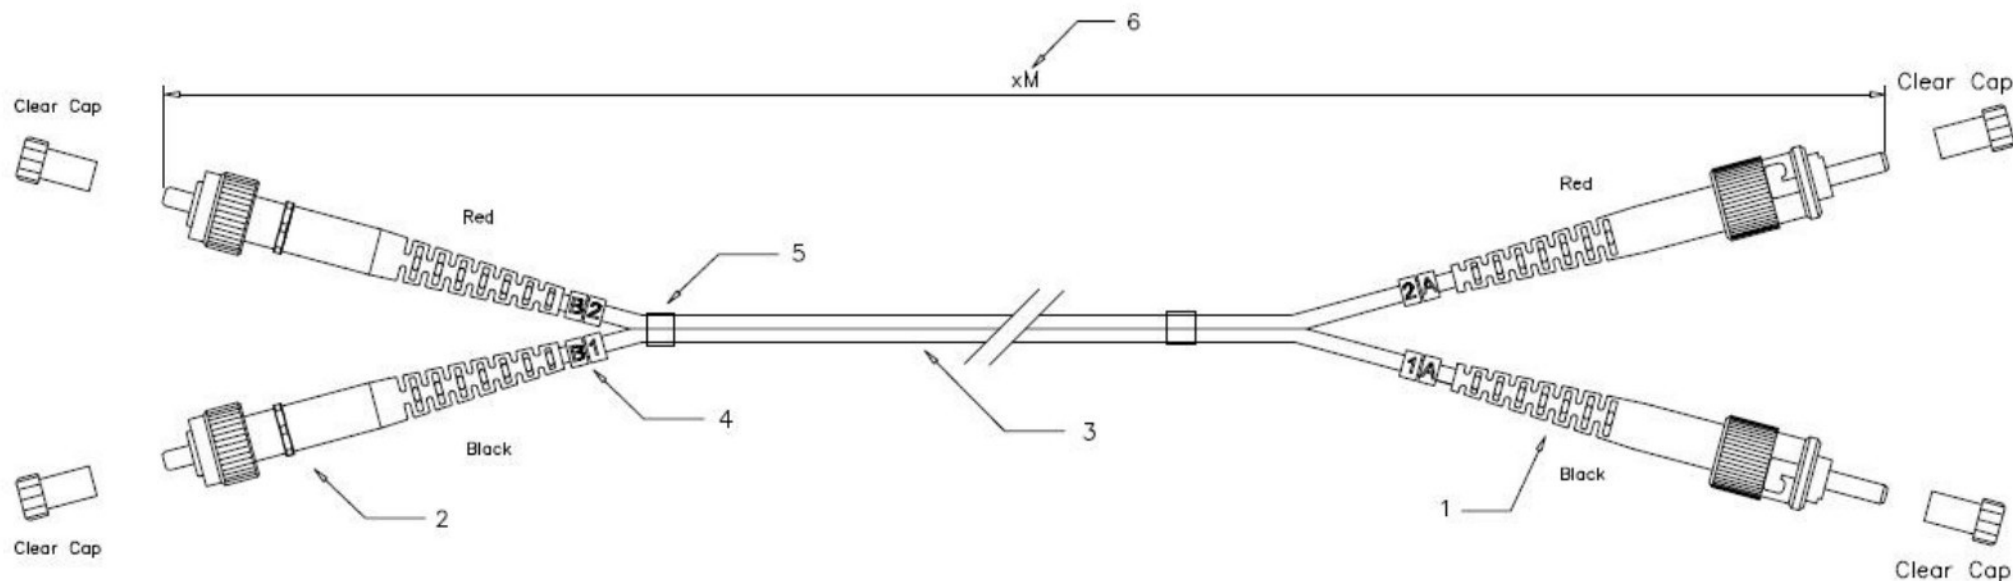


Specification:

1. Connector Type : ST Multimode
2. Connector Type : FC Multimode
3. Cable Type :
3-1 Zipcord cable, $\varnothing 2.0\text{mm}$, 62.5/125 μm Multimode
3-2 Calbe Jacket : Orange color, PVC material
4. Cable Marker
5. Shrink Tube
6. Length : xM

Performance:

- a. Insertion Loss : $< 0.5 \text{ dB}$
- b. Fiber Extension : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. Ferrule End-face Radius : $10 < R < 25\text{mm}$
- d. Apex Offset : $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operation Temperature : -20° to $+70^{\circ}$
- g. Storage Temperature : -40° to $+80^{\circ}$

FJ0x

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		10.MAY.2008		ZCY		ITEM NO.: FJPC-FCST-MD-L				
	CHECK		10.MAY.2008		DAY						
	APPROVAL		10.MAY.2008		YTY						
			DATE		NAME						
SCALE		1/1 (A4)		UNIT		mm		DES. ST to FC Duplex patch cord			
		DRAWING NO.		13-ADM1F23-XM(SA1)							
		DRAWING CLASSIFICATION		S		SHEET		1 OF 1			