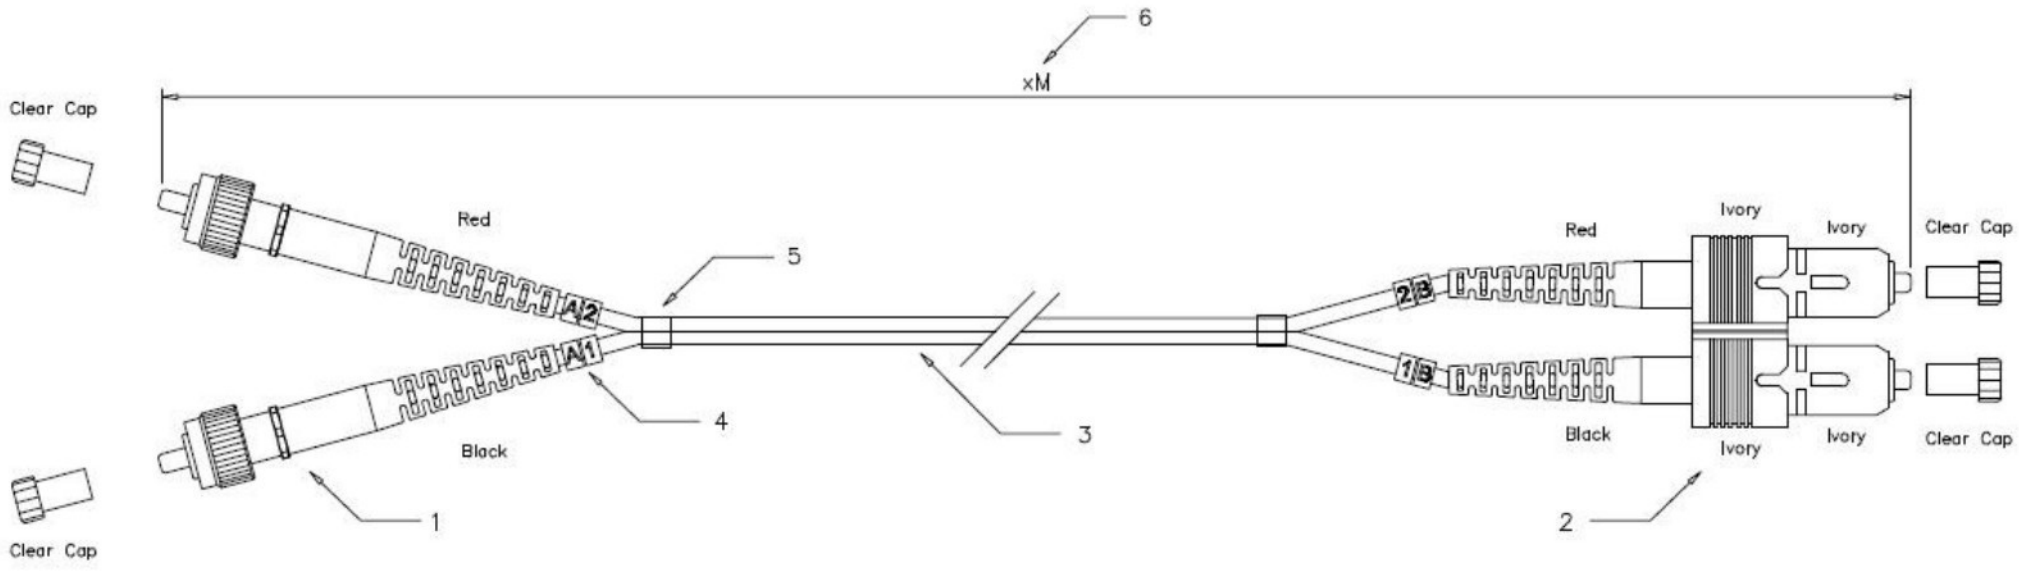

Specification:

1. Connector Type : FC Multimode
2. Connector Type : SC Multimode
3. Cable Type :
   3-1 Zipcord cable, ø2.0mm, 62.5/125um Multimode
   3-2 Calbe Jacket : Orange color, PVC material
4. Cable Marker
5. Shrink Tube
6. Length : xM

Performance:

a. Insertion Loss : <0.5 dB
b. Fiber Extention : −0.05um < H < +0.05um
c. Ferrule End-face Radius : 10 < R < 25mm
d. Apex Offset : < 50um
e. Increase in insertion loss after 500 mating : 0.2 dB Max
f. Operation Temperature : −20° to +70°
g. Storage Temperature : −40° to +80°

FJ2x

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	12.MAY.2008	ZCY	
	CHECK	12.MAY.2008	DAY	
	APPROVAL	12.MAY.2008	YTY	
		DATE	NAME	ITEM NO.: FOPC-FCSC-MD-L
	SCALE 1/1(A4)	UNIT	mm	DES.: FC to SC Duplex patch cord
	DRAWING NO. 13-DHM1F23-XM(SA1)			
	DRAWING CLASSIFICATION S	SHEET 1 OF 1		A1