
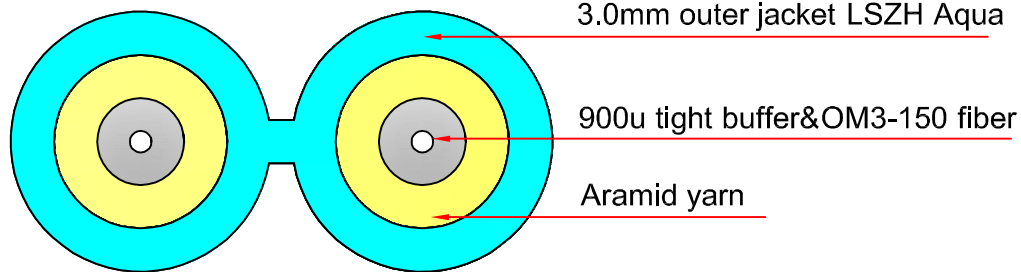


BUY ON

[www.cablematic.com](http://www.cablematic.com)

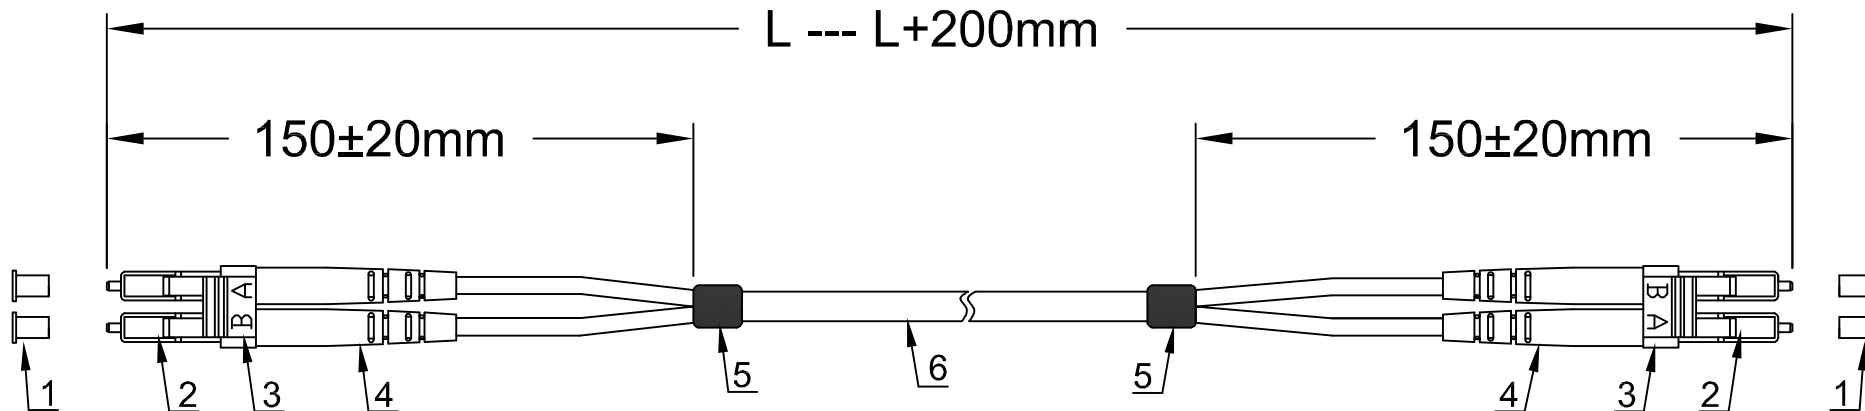

ASSEMBLY CONNECTIVITY	
LC/PC-1	LC/PC-2
A	B
B	A

NOTE:

- 1. Insertion loss :LC/UPC<0.25dB    λ: 850&1300nm
- Return loss :LC/UPC≥30dB    λ: 850&1300nm
- 2. Durability:500 matings
- 3. Operation temperature:-40°C to +85°C
- 4. LC connector according to IEC 61754-20

ROHS  
Compliant

LC/PC --- LC/PC DX 3.0mm OM3-150 LSZH Aqua

ITEM	Description	Q'TY
1	LC dust cover white	4 PCS
2	LC/PC MM duplex connector beige	2 PCS
3	LC clip beige	2 PCS
4	LC boot white	4 PCS
5	Breakout heat-shrink tubing black L=15mm	2PCS
6	OD=3.0mm duplex OM3-150 fiber optical cable LSZH Aqua	1 PC

Designed by:		Audit:	
Date:	2018-06-25	Approve:	
Unit:	mm	Sheet:	A4
Drawing NO:			