


1	2	3	4	5	6	7	8	9
REV.	REMARK	DATE	SIGN.					

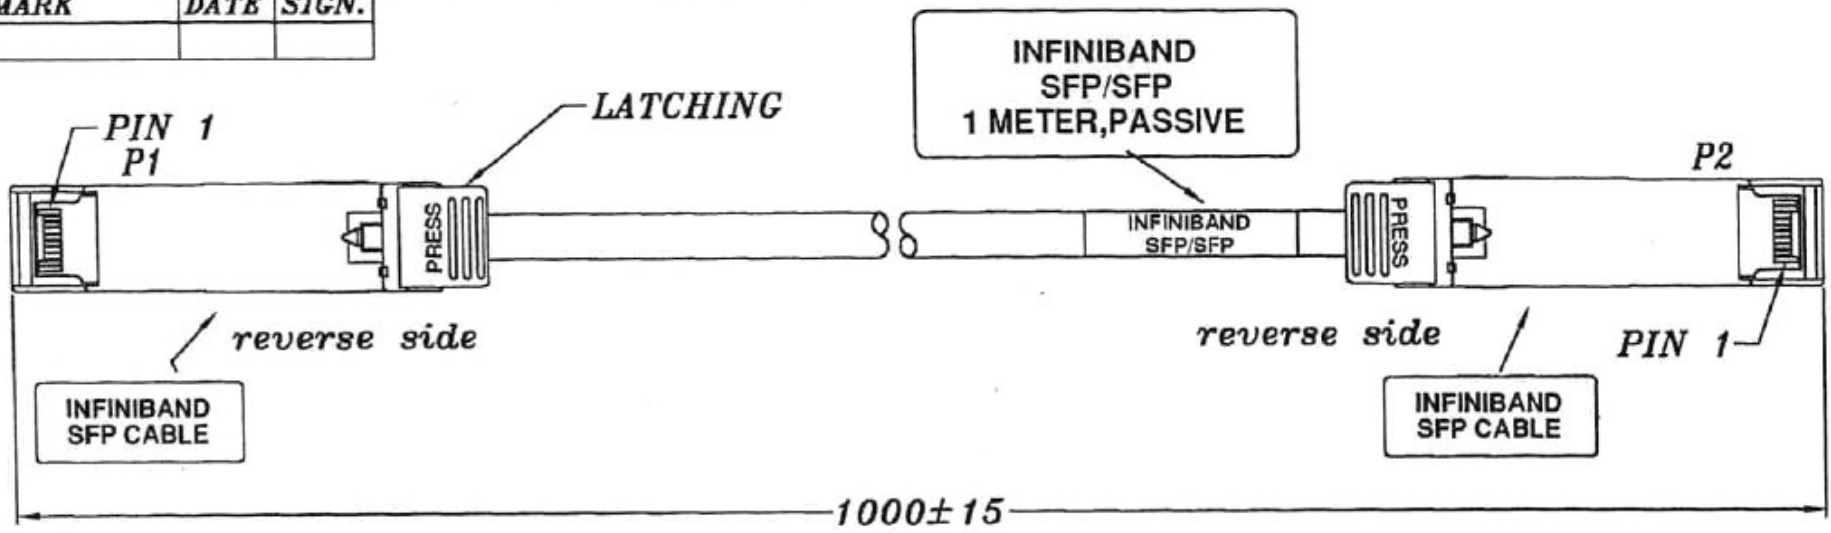

1. CABLE:

- CONDUCTOR: TWO TWISTED PAIRS, 24AWG SOLID SILVER PLATED COPPER.
 - INSULATION: FOAM POLYOLEFIN.
 - PAIR: 2 SINGLES LAID FLAT AND PARALLEL.
 - PAIR DRAIN WIRE: 26AWG SOLID SILVER PLATED COPPER.
 - PAIR SHIELD: ALUMINUM/POLYESTER TAPE. ALUMINUM SIDE FACING IN, 25% OVERLAP. COLOR-YELLOW.
 - INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP.
 - OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE.
 - DIAMETER: 6.86mm NOMINAL. COLOR: BLACK.
 - PRINT LEGEND: "MADISON CABLE CORP. TYPE CL2 75°C 24AWG (UL) TurboTwin™"
 - DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR
 - UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE. TARBO TWIN™
2. HOOD: ZINC DIE CASTING, NICKEL PLATING.
 3. LATCH: ABS RESIN UL94V, COLOR IN BLACK.
 4. P.C.B.: 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS, COLOR: RED.
 5. SERIAL ID IC:
 6. PASSIVE TYPE.

正式圖
92.10.30
陳水健

WIRING CHART			
P1 END		P2 END	
P1 PAD	SIGNAL	P1 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
GROUND		GROUND	
18	TX+	13	RX+
19	TX-	12	RX-
GROUND		GROUND	

DESC.	SFP/SFP CABLE 24AWG FOR INFINIBAND	APPROVED	CHECKED	DESIGNED	TOLERANCE	SCALE	1 = 1	UNIT	mm	
P/N	CUSTOMER P/N			Willy		DATE	10/27/03	DWG NO.	DWC\RC\1089	