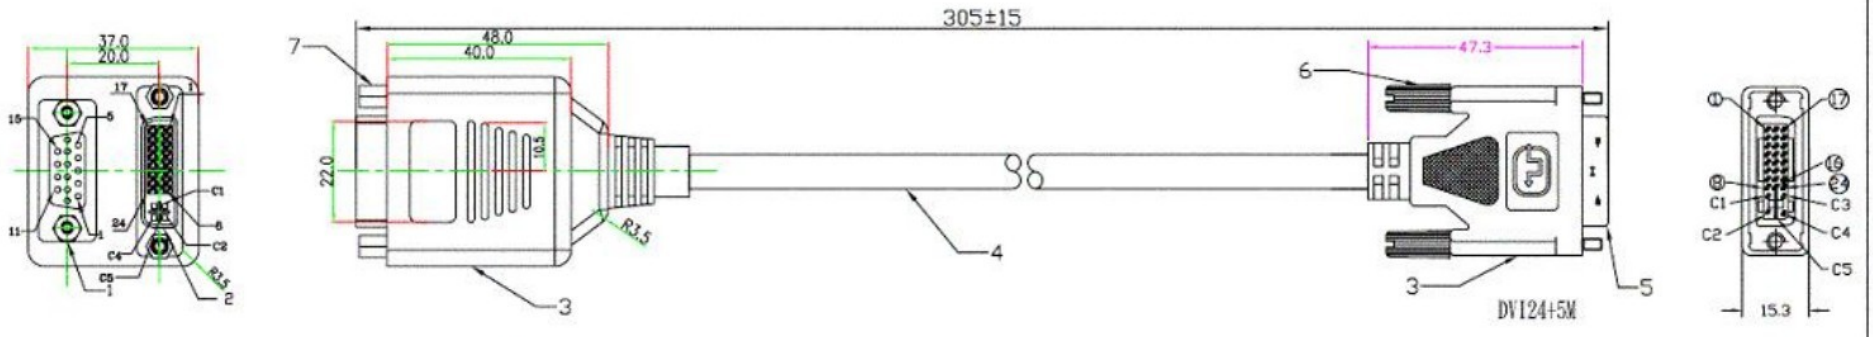

SHIELD	SHIELD	SHIELD
C5	C5	13
C4	C4	3
C3	C3	6,7,8
C2	C2	2
C1	C1	1
PIN24	PIN24	
PIN23	PIN23	
PIN22	PIN22	
PIN19	PIN19	
PIN18	PIN18	
PIN17	PIN17	
PIN16	PIN16	9
PIN15	PIN15	5,10
PIN14	PIN14	9
PIN11	PIN11	
PIN10	PIN10	
PIN9	PIN9	
PIN8	PIN8	14
PIN7	PIN7	12
PIN6	PIN6	15
PIN3	PIN3	
PIN2	PIN2	
PIN1	PIN1	
DVI 24+5(M)	DVI 24+5(F)	HD15P(F)

ELECTRONIC TEST:

1. OPEN/SHORT/INTERMITTE:100%.
2. CURRENT RATING:1.5AMP.
3. INSULATION RESISTANCE:DC 500V AT 10ms R>50MΩ
4. CONTACT RESISTANCE:<1Ω .

No.	DESCRITION	UNIT	Q'TY
7	THUMB NUT #4-40UNC PLATED:GOLD	PCS	2
6	THUMB SCREW #4-40UNC PLATED:GOLD ABS COLOR:BLACK	PCS	2
5	DVI 24+5 MALE SOLDER COLOR:BLACK SHELL PLATED:GOLD	PCS	1
4	UL2919 30AWG*3C+24AWG*9C+AM+D+B OD8.5 COLOR:BLACK	PCS	1
3	PVC MOLDED BLACK IN COLOR		
2	DVI 24+5 FEMALE PLATED: GOLD	PCS	1
1	HD15P FEMALE SOLDER SHELL PLATED:GOLD	PCS	1

REV.	DESCRIPTION	DATE
A		06/06/15

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5'
0. ±0.5
.0 ±0.3
.00 ±0.2

SCALE: NONE	UNIT: mm		
DRAWN ERIC XU	06/06/15	DRAWN NAME:	SPL-D29M-F15F-1FT
CHECKED	/ /		
APPROVED	/ /	PRODUCT NO.	
	SIZE A4	REV. A	FILE NAME: