


PIN OUT

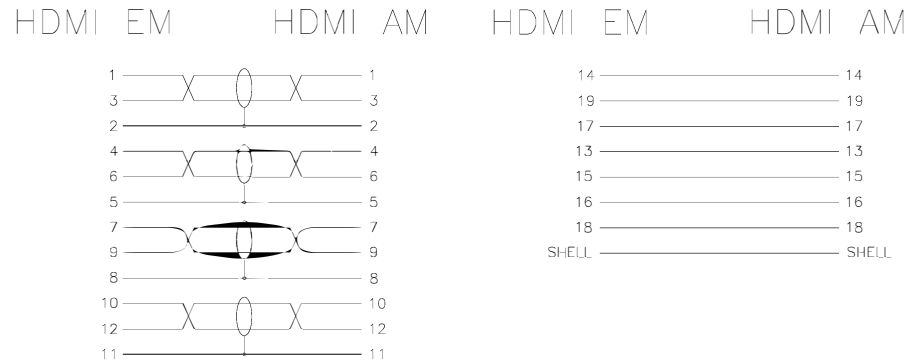

NOTE:

- 1.OPEN/SHORT/INTERMITTENCE 100%TEST.
- 2.HI-POT: 300V DC/0.1SEC.
- 3.INSULATION RESISTANCE:300V DC/0.1SEC,5Mohm MIN.
- 4.CONNECTION RESISTANCE:3ohm MAX.
- 5.RoHS COMPLIANT.

MATERIAL LIST:

- 1.CABLE:UL20276 (32AWG*1P+1C+AL)*5+32AWG*4C+ADB, OD:4.6MM BLACK PVC
- 2.CONN:HDMI 19P/M A TYPE,PIN G/F,SHELL:G/F,PLATED
- 3.INNER MOLD:PE LOW DENSITY
- 4.OVER MOLD:45P PVC BLACK.

A	INITIAL RELEASE			
REV	DESCRIPTION OF CHANGE			DATE
	TOLERANCE INCHES	M/M	BUY ON www.cablematic.com	
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05		⊕
DRAWN BY	MQ PERK		REV	A0
CHECK BY	ZH JUCKER		SHEET	1/1
APPD BY	LQ SUNY		CUSTOMER:	
P/N: 501000H100			DATE	16/05/20
			DWG NO.:	M1605-H100A
			TITLE:	HDMI EM TO AM,I=1.5M
			CUSTOMER. P/N:	