




BUY ON

www.cablematic.com

| REV | DESCRIPTION        | DATE      | ECN NO. |
|-----|--------------------|-----------|---------|
| 1.0 | Production Release | 2017/7/19 |         |

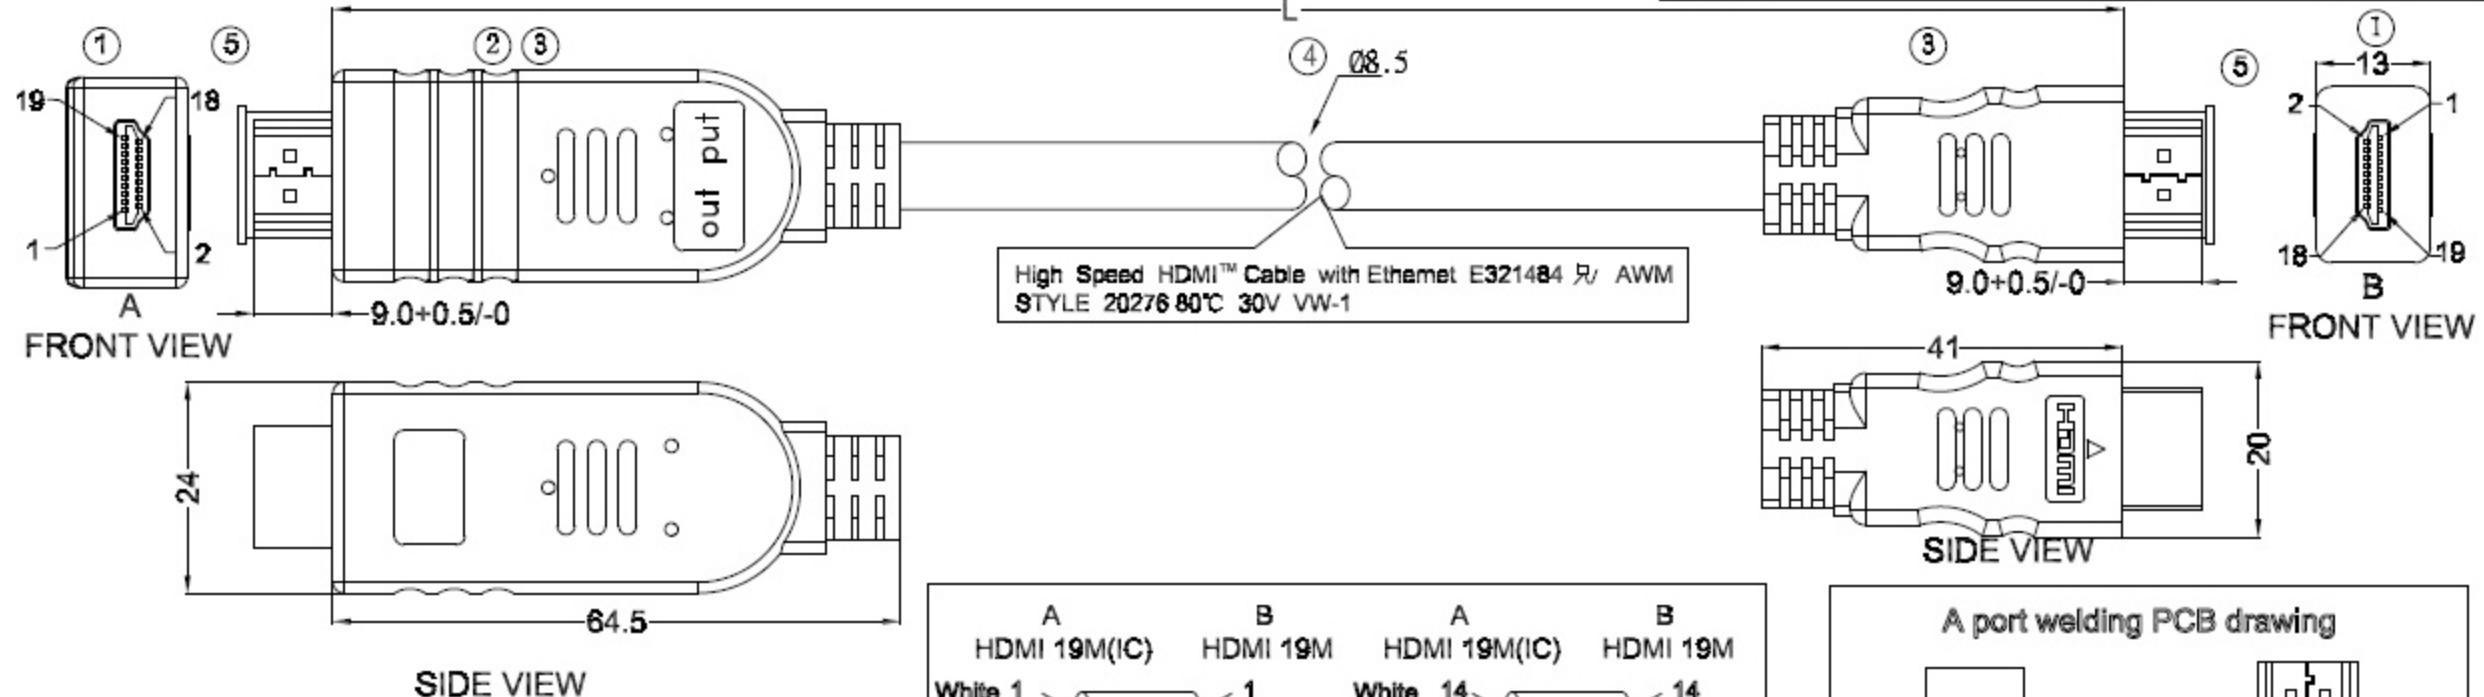

Test Requirements:  
 1.100% television screen test 1080P  
 2.Pay attention to direction,SINK port connect television port.

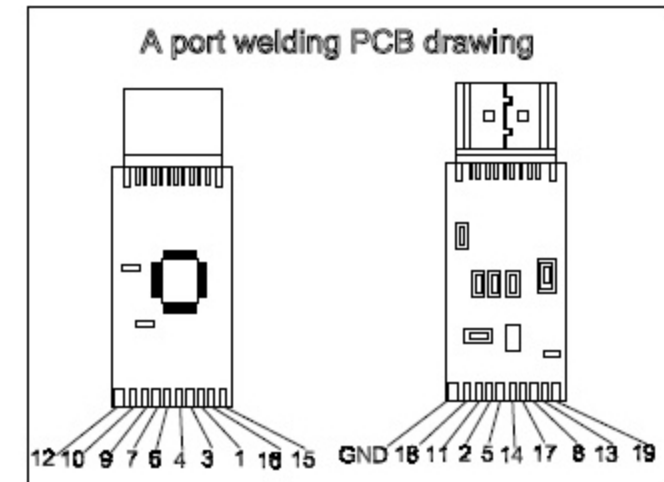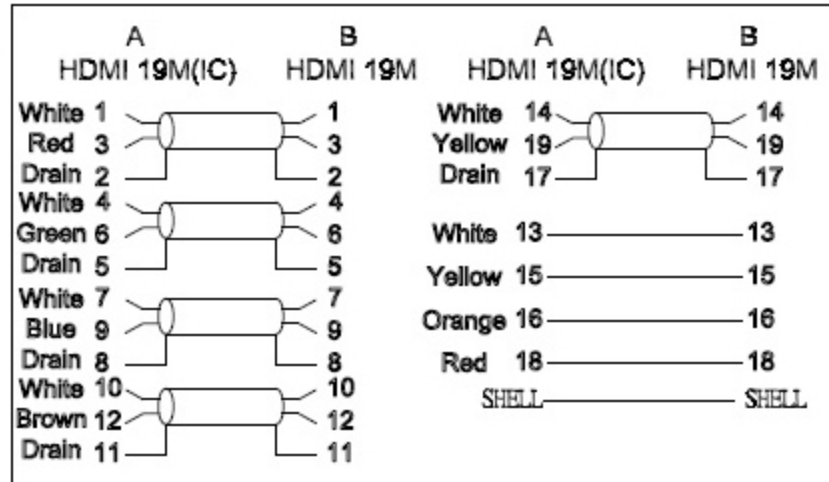

|     |           |  |     |
|-----|-----------|--|-----|
| ⑤   | HDMI CAP  | HDMI CAP TRANSPARENT   | 2   |
| ④   | CABLE     | HDMI 1.4V, (1P*26AWG(1/0.404BC)+D+AL)*5C+3C*28#(1/.32BC)+1C*28AWG(1/0.404BC)+AL+D+B (128/AL-MG) BLACK PVC JACKET Φ8.5mm RoHS |     |
| ③   | MODEL     | PVC MOLDING ,COLOR:BLACK   |     |
| ②   | CONNECTOR | HDMI 19 PIN MALE CONNECTOR,CONTACT GOLD PLATED ,SHELL:GOLD PLATED INSULATOR COLOR:BLACK+EQUALIZER                            | 1   |
| ①   | CONNECTOR | HDMI 19 PIN MALE CONNECTOR,CONTACT GOLD PLATED ,SHELL:GOLD PLATED INSULATOR COLOR:BLACK                                      | 1   |
| NO. | PART NAME | DESCRIPTION  | QTY |

| DESCRIPTION |                | HDMI 19M TO HDMI 19M+EQULAIZER CABLE               |            |
|-------------|----------------|--|------------|
| P/N         | F5819K-XXXX-BK | DWG NO   | F5819K     |
| CUSTOMER    | 線联             | CUSTOMER P/N                                       |            |
| UNIT        | mm             | TOLERANCE:   | DRAWN BY   |
| SCALE       | NTS            | LINEAR:<br>X. =±1<br>.X =±0.2<br>.XX=±0.05         | PENG       |
| SHEET       | 1/2            | ANGULAR:<br>X.° =±1°<br>.X° =±0°30'                | CHECKED BY |
|             |                | FILLET:<br>R2=RAD.2mm<br>R5=RAD.5mm<br>XR=MAX RAD. | APPD. BY   |
|             |                | CHAMFER:<br>C0.5=CHAM0.5mm<br>C1=CHAM1mm           | DATE       |
|             |                |  | 2017/7/19  |