

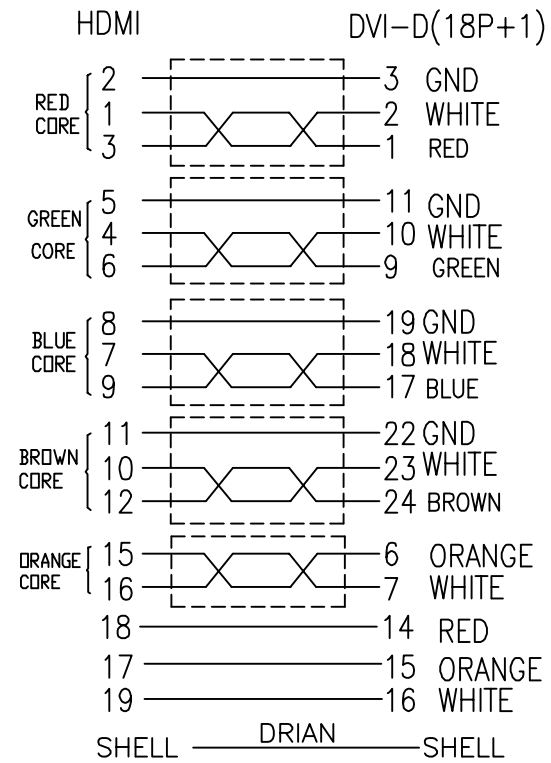
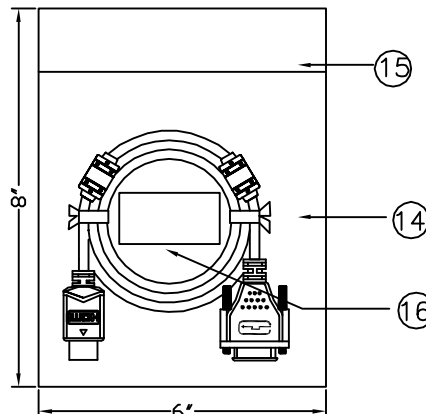


WEIGHT	CUSTOMER NO:	REMARK
	HH1	CABLEMATIC

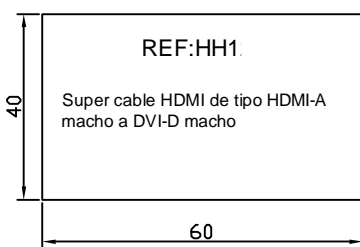

NOTES:

- 1) PRIMARY DIM: A.
- 2) P1:DIE NO:OD15Z14,OSOD194 P2:OH24010;CORE DIE NO.:OF00011
- 3) INSULATION RESISTANCE:10M ohm (MIN) 300V/DC
- 4) CONTACT RESISTANCE:5 ohm (MAX)
- 5) connector plated gold.
- 6) ROHS COMPLIANT
- 7) 1PC/PE BAG+LABEL.

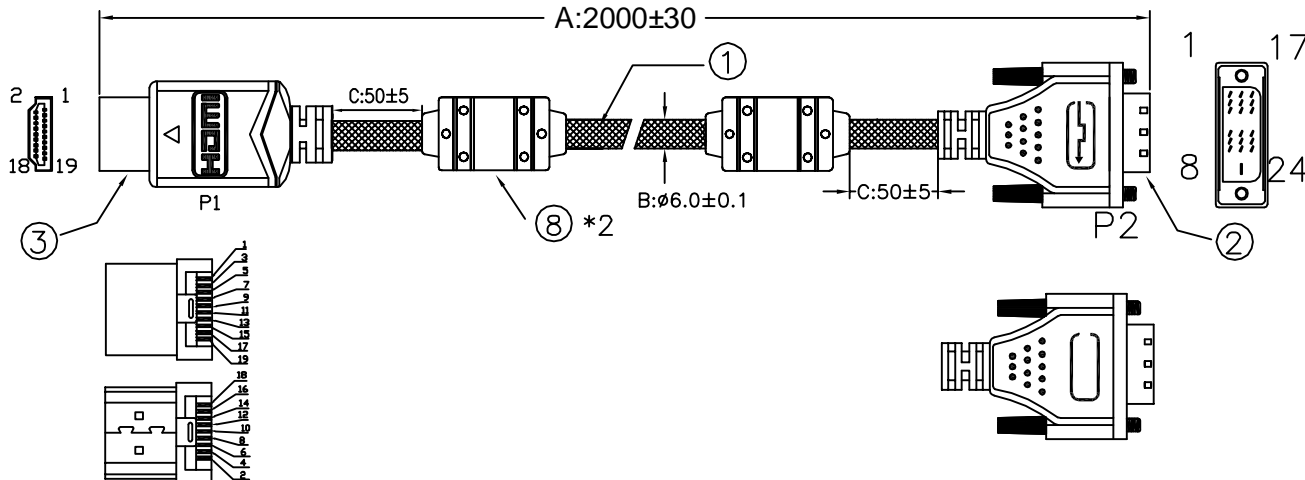

3	HDMI A/M SOLDER TYPE TERMINAL & SHELL PLATED GOLD 1U" RoHS
2	DVI 18+1 MALE SOLDER TYPE TERMINAL&SHELL PLATED GOLD W/O METAL HOOD RoHS
1	HDMI UL20276 (30#1P+AL+D+MY)*5+30#4C+A+B(64編外鐵絲)+D OD:6.0MM BLACK(1101)(帶編織網) RoHS 2000MM

A	FIRST EDITION	WUZAN	21/02/2011
REV.	ECR	DESCRIPTION	C.N. DATE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.		TITLE	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		HDMI OT DVI CABLE	
DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm		APPD.
80.01 TO 150.00mm	±0.15mm		
150.01mm	±0.20mm	PART NO.	
MATERIAL	MATERIAL	SCALE	SHEET 1/1 UNIT MM SIZE A4 REV. A
FINISH	FINISH		