

QUICK INSTALLATION GUIDE

Powerline Network Adapter

Model: 7HP120 / 7HP150

WARM REMINDER

Connecting the powerline adapters with a power strip




This powerline device is default paired, and can plug and play after plugging into electrical socket, no need to pair manually.


If need to re-pairing or pair among multi devices, just press security button for 1 second only. Long time press may lead to device reset, network name changed and pair failure. You can remove this problem by revising run CD driver and revise device's network name to be incosistant, the problem will be removed.

※ Powerline product have to work with two pcs at least in the same circuit.

PHYSICAL CONNECTION

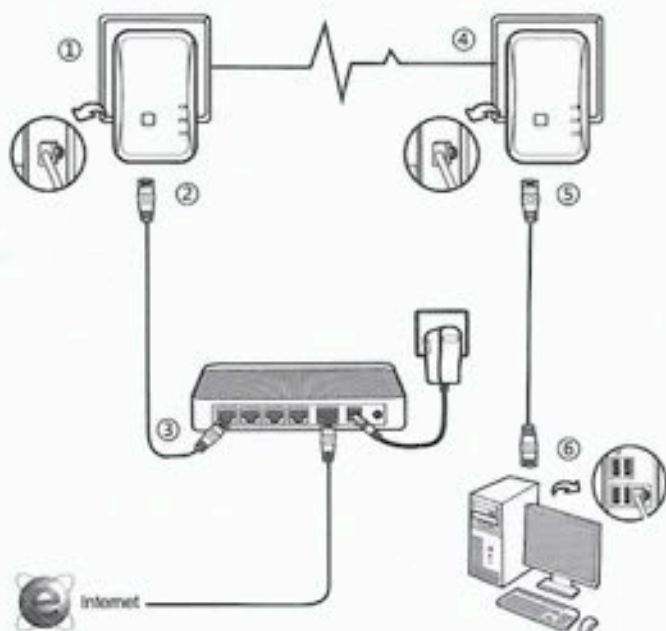

LED AND BUTTON DESCRIPTIONS

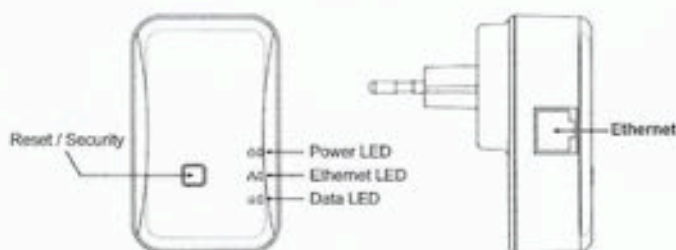

LED	Status	Description
Power LED	Off	Power is off
	On	Power is on
Ethernet LED	Off	No network connection
	On	The LAN cable is connected successfully
	Blinking	Data is being transmitted over Ethernet
Data LED	Off	The product is not connected to Powerline network
	On	The product is connected to Powerline network
	Blinking	Data is being transmitted over Powerline network
	Red	Network signal is weak

Button	Function
Reset / Security	Security: Pressing and holding the Security/Reset button for 1 seconds makes the adapter a member of the existing AVLN. Reset: Pressing and holding the Button for more than 3 seconds makes the adapter restore the factory default settings.

※ Please ensure that the PWR, ETH and Data LED are on after you finished the connection.

BUY ON

www.cablematic.com