


Features:

- Broadcast-Quality Condenser Mic with extended length
- Higher directivity, and narrows the pick up area
- Two step High Pass Filter (Flat/80Hz)
- Low noise circuitry
- Rugged, durable ,lightweight and all aluminum alloy construction.
- 48V Phantom Power or 1.5 AA battery

Specifications:

Acoustic Principle:	Line plus gradient
Directional Pattern:	Super-Cardioid
Frequency Range:	30Hz ~ 20,000Hz
Sensitivity:	-33dB \pm 2dB re 1V/Pa @ 1kHz
Output impedance:	280 Ohm or more-----phantom 380 Ohm or more ----battery
Signal to noise ratio:	80dB or more
Power:	1.5v battery or 48v phantom
Filter:	Controlled by low-cut filter switch
Length:	38cm
Output Connection:	3-Pin XLR
Net Weight:	146g

Frequency Response

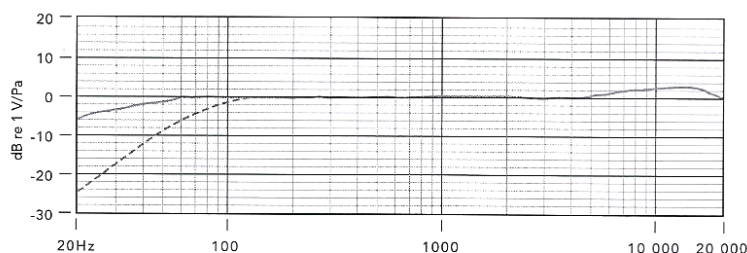

Polar Pattern

